

# **MELSEC AnS series**

## **Programmable Controller User's Manual**

### **I/O Modules**

# ● SAFETY PRECAUTIONS ●

(Read these precautions before using.)

When using Mitsubishi equipment, thoroughly read this manual and the associated manuals introduced in this manual.

Also pay careful attention to safety and handle the module properly. These precautions apply only to Mitsubishi equipment. Refer to the CPU module user's manual for a description of the PC system safety precautions.

These ● SAFETY PRECAUTIONS ● classify the safety precautions into two categories: "DANGER" and "CAUTION".



## DANGER

**Procedures which may lead to a dangerous condition and cause death or serious injury if not carried out properly.**



## CAUTION

**Procedures which may lead to a dangerous condition and cause superficial to medium injury, or physical damage only, if not carried out properly.**

Depending on circumstances, procedures indicated by CAUTION may also be linked to serious results.

In any case, it is important to follow the directions for usage.

Store this manual in a safe place so that you can take it out and read it whenever necessary. Always forward it to the end user.

## [DESIGN PRECAUTIONS]



### DANGER

- Install a safety circuit external to the PC that keeps the entire system safe even when there are problems with the external power supply or the PC module. Otherwise, trouble could result from erroneous output or erroneous operation.
  - (1) Outside the PC, construct mechanical damage preventing interlock circuits such as emergency stop, protective circuits positioning upper and lower limits switches and interlocking forward/reverse operations.
  - (2) When the PC detects the following problems, it will stop calculation and turn off all output.
    - The power supply module has and over current protection equipment and over voltage protection equipment.
    - The PC CPUs self diagnostic functions, such as the watchdog timer error, detect problems. In addition, all output will be turned on when there are problems that the PC CPU cannot detect, such as in the I/O controller. Build a fail safe circuit exterior to the PC that will make sure the equipment operates safely at such times. Refer to Section 8.1 of this user's manual for example fail safe circuits.Refer to this user's manual for example fail safe circuits.
  - (3) Output could be left on or off when there is trouble in the output module relay or transistor. So build an external monitoring circuit that will monitor any single output that could cause serious trouble.
- When overcurrent which exceeds the rating or caused by short-circuited load flows in the output module for a long time, it may cause smoke or fire. To prevent this, configure an external safety circuit, such as fuse.
- Build a circuit that turns on the external power supply when the PC main module power is turned on. If the external power supply is turned on first, it could result in erroneous output or erroneous operation.



### CAUTION

- Do not bunch the control wires or communication cables with the main circuit or power wires, or install them close to each other. They should be installed 100mm (3.94inch) or more from each other. Not doing so could result in noise that would cause erroneous operation.

## [INSTALLATION PRECAUTIONSDANGER]

### CAUTION

- Use the PC in an environment that meets to the general specifications contained in this manual. Using the PC in an environment outside the range of the general specifications could result in electric shock, fire, erroneous operation, and damage to or deterioration of the product.
- Install so that the pegs on the bottom of the module fit securely into the base unit peg holes and use the specified torque to tighten the module's fixing screws. Not installing the module correctly could result in erroneous operation, damage, or pieces of the product falling. Tightening the screws too far may cause damages to the screws and/or the module, resulting in fallout, short circuits, or malfunctions.
- Do not directly touch the module's conductive parts or electronic components. Doing so could cause erroneous operation or damage of the module.

## [WIRING PRECAUTIONS]

### DANGER

- Completely turn off the external power supply when installing or placing wiring. Not completely turning off all power could result in electric shock or damage to the product.
- When turning of the power supply or operating the module after installation or wiring work, be sure that the module's terminal covers are correctly attached. Not attaching the terminal cover could result in electric shock.

### CAUTION

- Be sure to ground the FG terminals and LG terminals to the protective ground conductor. Not doing so could result in electric shock or erroneous operation.
- When wiring in the PC, be sure that it is done correctly by checking the product's rated voltage and the terminal layout. Connecting a power supply that is different from the rating or incorrectly wiring the product could result in fire or damage.
- Tighten the terminal screws to with the specified torque. If the terminal screws are loosen, it could result in short circuits, fire or erroneous operation. Tightening the terminal screws too far may cause damages to the screws and /or the module, resulting in fallout, short circuits, or malfunctions.
- Be sure there are no foreign substances such as sawdust or wiring debris inside the module. Such debris could cause fires, damage, or erroneous operation.
- External connections shall be crimped or pressure welded with the specified tools, or correctly soldered. For information regarding the crimping and pressure welding tools, refer to the I/O module's user's manual. Imperfect connections could result in short circuit, fires, or erroneous operation.

## [STARTUP AND MAINTENANCE PRECAUTIONS]



### DANGER

- Do not touch the terminals while the power is ON. Doing so could cause shock or erroneous operation.
- Switch all phases of the external power supply off when cleaning the module or tightening the terminal screws. Not doing so could result in electric shock. If the screws are too tight, it may cause falling, short circuit or erroneous operation due to damage of the screws or modules.



### CAUTION

- Do not disassemble or modify the modules.  
Doing so could cause trouble, erroneous operation, injury, or fire.
- Switch all phases of the external power supply off before mounting or removing the module.  
If you do not switch off the external power supply, it will cause failure or malfunction of the module.

## [DISPOSAL PRECAUTIONS]



### CAUTION

- When disposing of this product, treat it as industrial waste

## REVISIONS

\* The manual number is given on the bottom left of the back cover.

Print Date	*Manual Number	Revision
Feb.,1995	IB (NA) 66541-A	First edition
Nov.,1995	IB (NA) 66541-B	<p>Addition of models A1SX10EU, A1SX20EU, A1SY10EU, A1SY14EU, A1SY18AEU, A1SY28EU</p> <p>Correction INTRODUCTION, CONTENTS, Manuals, Page 1-2, 1-3, 1-4, 4-7, 4-8</p>
Jul.,1996	IB (NA) 66541-C	<p>Correction Section 4.2</p>
Sep.,1996	IB (NA) 66541-D	<p>Correction Section 3.2, 4.1.1, 4.1.2, 4.1.3</p>
Mar.,1997	IB (NA) 66541-E	<p>Addition A6TB[36], A6TB[54], A6TBX70, Chapter 5</p> <p>Correction Section 4.2.1, 4.2.2</p>
Sep.,1997	IB (NA) 66541-F	<p>Addition SAFETY PRECAUTIONS, Section 1.1, 1.2</p> <p>Correction CONTENTS, Section 1.2, 2.1 to 2.4, 2.8, 3.1 to 3.5, 3.8 to 3.11, 3.13, 4.1.2 to 4.1.5, 4.2.2, 5.1, 6.1, 6.2, Chapter 7, APPENDICES</p>
Dec.,1997	IB (NA) 66541-G	<p>Addition Section 1.2, 3.15 (A1SY81EP)</p> <p>Correction SAFETY PRECAUTIONS, CONTENTS, APPENDICES</p>

## CONTENTS

<b>1. NOTES ON SELECTING INPUT AND OUTPUT MODULES.....</b>	<b>1 – 1 ~ 1 – 8</b>
<b>2. INPUT MODULE SPECIFICATIONS .....</b>	<b>2 – 1 ~ 2 – 11</b>
2.1 A1SX10 AC Input Module .....	2 – 1
2.2 A1SX10EU AC Input Module .....	2 – 2
2.3 A1SX20 AC Input Module .....	2 – 3
2.4 A1SX20EU AC Input Module .....	2 – 4
2.5 A1SX30 DC/AC Input Module.....	2 – 5
2.6 A1SX40(S1/S2) DC Input Module (Sink Type) .....	2 – 6
2.7 A1SX41(S2) DC Input Module (Sink Type).....	2 – 7
2.8 A1SX42(S2) DC Input Module (Sink Type).....	2 – 8
2.9 A1SX71 DC Input Module (Sink/Source Common Type) .....	2 – 9
2.10 A1SX80(S1/S2) DC Input Module (Sink/Source Common Type) .....	2 – 10
2.11 A1SX81(S2) DC Input Module (Sink/Source Common Type) .....	2 – 11
<b>3. OUTPUT MODULE SPECIFICATIONS .....</b>	<b>3 – 1 ~ 3 – 20</b>
3.1 A1SY10 Contact Output Module .....	3 – 1
3.2 A1SY10EU Contact Output Module .....	3 – 2
3.3 A1SY14EU Contact Output Module .....	3 – 3
3.4 A1SY18A Contact Output Module (All Points Independent) .....	3 – 4
3.5 A1SY18AEU Contact Output Modules (All Points Independent) .....	3 – 5
3.6 A1SY22 Triac Output Module .....	3 – 6
3.7 A1SY28A Triac Output Module (All Points Independent) .....	3 – 7
3.8 A1SY28AEU Triac Output Module .....	3 – 8
3.9 A1SY40 Transistor Output Module (Sink Type) .....	3 – 9
3.10 A1SY41 Transistor Output Module (Sink Type) .....	3 – 10
3.11 A1SY42 Transistor Output Module (Sink Type) .....	3 – 11
3.12 A1SY50 Transistor Output Module (Sink Type) .....	3 – 13
3.13 A1SY60 Transistor Output Module (Sink Type) .....	3 – 14
3.14 A1SY60E Transistor Output Module (Source Type) .....	3 – 15
3.15 A1SY68A Transistor Output Module (Sink/Source Common Type (All Points Independent)) .....	3 – 16
3.16 A1SY71 Transistor Output Module (Sink Type) .....	3 – 17
3.17 A1SY80 Transistor Output Module (Source Type) .....	3 – 18
3.18 A1SY81 Transistor Output Module (Source Type) .....	3 – 19
3.19 A1SY81EP Circuit Protection Provided Transistor Output Module (Source Type) .....	3 – 20
<b>4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS .....</b>	<b>4 – 1 ~ 4 – 12</b>
4.1 Input/Output Composite Module Specifications .....	4 – 1
4.1.1 A1SH42 input/output module .....	4 – 1
4.1.2 A1SX48Y18 I/O module (24 VDC input (sink type), relay contact output) .....	4 – 3
4.1.3 A1SX48Y58 I/O module (24 VDC input (sink type), 12/24 VDC transistor output) .....	4 – 5
4.1.4 A1SJ-56DT I/O module.....	4 – 7
4.1.5 A1SJ-56DR I/O module .....	4 – 8

4.2	Dynamic Input/Output Module Specifications . . . . .	4 – 9
4.2.1	A1S42X dynamic input module. . . . .	4 – 9
4.2.2	A1S42Y dynamic output module. . . . .	4 – 11
<b>5.</b>	<b>SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES.....</b>	<b>5 – 1 ~ 5 – 5</b>
5.1	Specifications of Connector/Terminal Block Convertor Modules . . . . .	5 – 1
5.2	Connector/Terminal Block Convertor Module Connection Diagrams . . . . .	5 – 2
5.2.1	A6TBXY36 . . . . .	5 – 2
5.2.2	A6TBXY54 . . . . .	5 – 2
5.2.3	A6TBX70. . . . .	5 – 3
5.2.4	A6TBX36-E . . . . .	5 – 3
5.2.5	A6TBY36-E . . . . .	5 – 4
5.2.6	A6TBX54-E . . . . .	5 – 4
5.2.7	A6TBY54-E . . . . .	5 – 5
5.2.8	A6TBX70-E . . . . .	5 – 5
<b>6.</b>	<b>BLANK COVER, DUMMY MODULE SPECIFICATIONS.....</b>	<b>6 – 1</b>
6.1	Blank Cover (A1SG60), Dummy Module (A1SG62) Specifications . . . . .	6 – 1
6.2	Setting the Occupying Number of Inputs/Outputs for A1SG62 . . . . .	6 – 1
<b>7.</b>	<b>NAMES OF PARTS AND SETTINGS .....</b>	<b>7 – 1 ~ 7 – 6</b>
<b>8.</b>	<b>I/O CONNECTION TROUBLESHOOTING.....</b>	<b>8 – 1 ~ 8 – 3</b>
8.1	Input Circuit Troubleshooting . . . . .	8 – 1
8.2	Output Circuit Failures and Corrective Action . . . . .	8 – 3
<b>APPENDICES .....</b>	<b>APP – 1 ~ APP – 8</b>	
<b>APPENDIX1 OUTSIDE DIMENSIONS .....</b>	<b>APP – 1</b>	
1.1	Input/Output Modules . . . . .	APP – 1
1.1.1	Terminal base connecting type . . . . .	APP – 1
1.1.2	40-pin connector type . . . . .	APP – 1
1.1.3	37-pin D sub-connector type 32-input/output module . . . . .	APP – 2
1.2	Dynamic I/O Module. . . . .	APP – 3
1.3	A1SJ-56 Input/Output Combination Module. . . . .	APP – 3
1.4	Dummy Module, Blank Cover. . . . .	APP – 4
1.4.1	A1SG60 blank cover . . . . .	APP – 4
1.4.2	A1SG62 dummy module. . . . .	APP – 4
1.5	Connector/Terminal Block Convertor Modules. . . . .	APP – 5
1.5.1	A6TB[36] type connector/terminal block convertor module. . . . .	APP – 5
1.5.2	A6TB[54] type connector/terminal block convertor module. . . . .	APP – 5
1.5.3	A6TBX70[ ] type connector/terminal block convertor module. . . . .	APP – 6

1.6	40-Pin Connectors . . . . .	APP – 7
1.6.1	A6CON1 soldering-type 40-pin connector, A6CON2 crimp-contact-type 40-pin connector . . . . .	APP – 7
1.6.2	A6CON3 pressure-displacement-type 40-pin connector . . . . .	APP – 7
1.7	Pin D Sub-Connectors . . . . .	APP – 8
1.7.1	A6CON1E soldering type 37-pin D sub-connector A6CON2E crimp-contact-type 37-pin D sub-connector . . . . .	APP – 8
1.7.2	A6CON3E pressure-displacement-type 37-pin D sub-connector . . . . .	APP – 8

## Manuals

The following manuals are also relevant to this product.

### Related manuals

- **A1SJCPU (S3) User's (Hardware) (IB-66469)**

This manual describes the cautions on handling, connection to I/O modules, and error codes of A1SJCPU (S3).

- **A1S/A1SC24-R2/A2S/A2ASCPU (S1/S30) User's (Hardware) (IB-66468)**

This manual describes the cautions on handling, connection to I/O modules, and error codes of A1S, A1SC24-R2, A2S and A2ASCPU (S1/S30).

## 1. NOTES ON SELECTING INPUT AND OUTPUT MODULES


- (1) It is recommended that a triac output module be used with a load that is frequently opened and closed or with a coil load (e.g. an electromagnet) that has a large capacity or a low power factor.

(If a contact output module is used, its service life will be shorter than specified.)

- (2) If an inductive L load is driven by an output module, it must be switched ON for 1 second or longer and switched OFF for 1 second or longer.

- (3) If a counter or timer which has a DC-DC converter as a load is used with an A1SY40, A1SY41, or A1SY42 output module, a fault may be caused in the output module due to periodic rush currents when it is turned ON or during operation.

To prevent failure due to rush current, connect a resistor or an inductance to the load in series or use an A1SY50 whose maximum load current is larger.








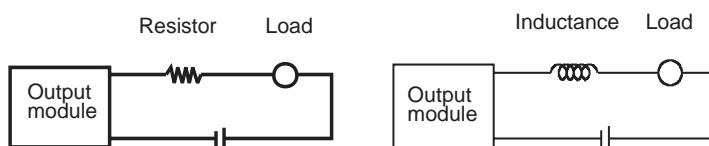


- (4) Fuses installed in output modules cannot be replaced. They are principally designed to protect external wiring if the module outputs are shorted.

Therefore, output modules may not be protected from a short circuit.


If an output module becomes faulty due to any cause other than a short circuit, its fuse may not function.

- (5) The number of signals which can be turned ON simultaneously in an input module varies according to the input voltage and ambient temperature. Select the number of the simultaneous ON signals by referring to the charts on the next page.

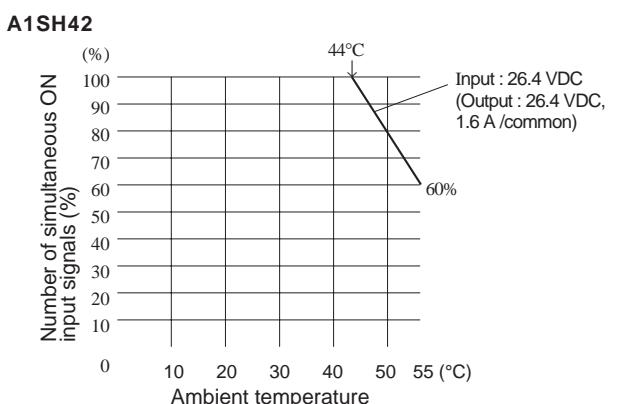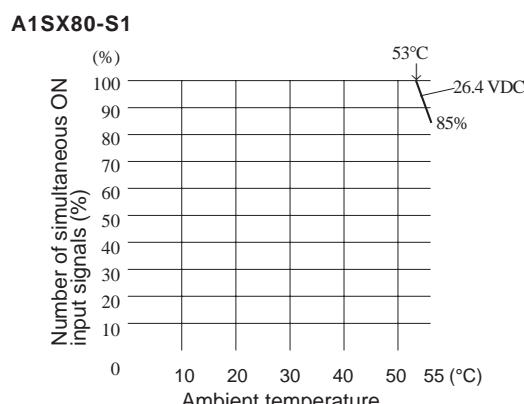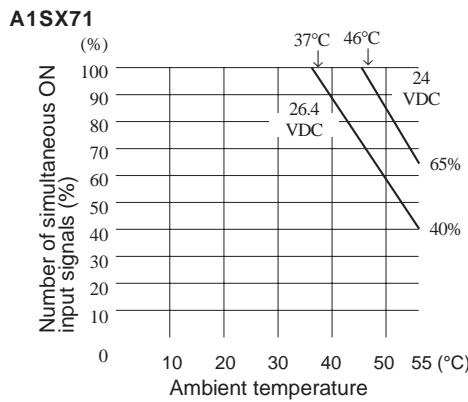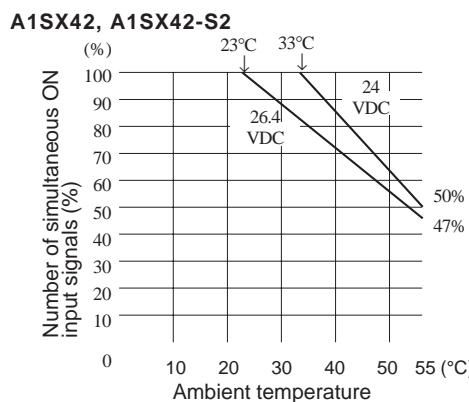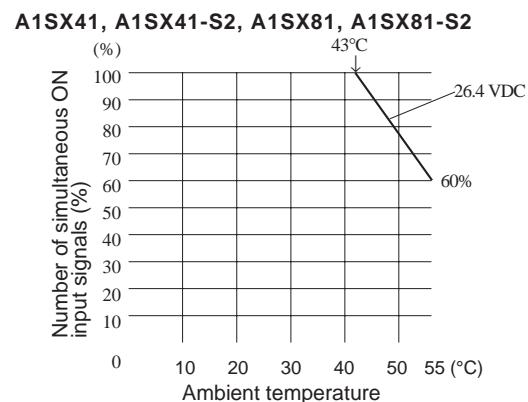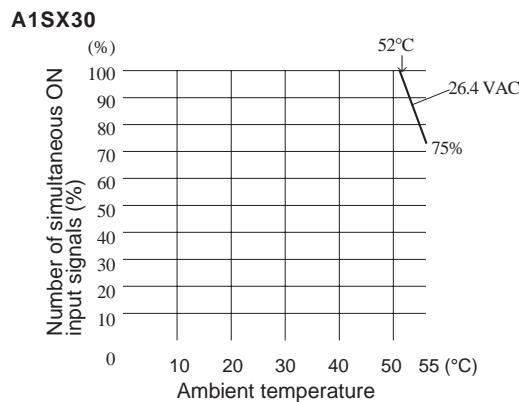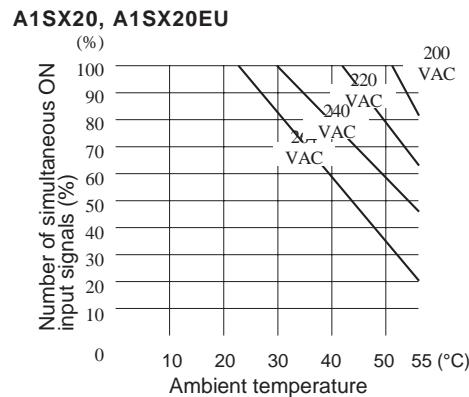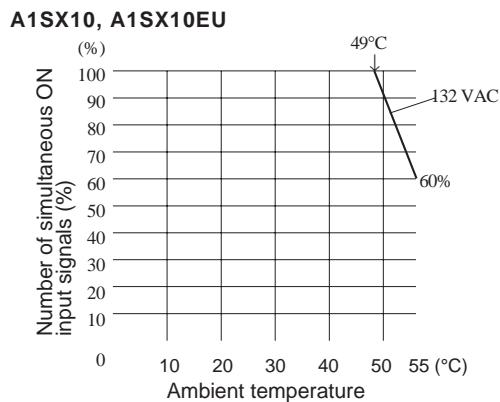

# 1. NOTES ON SELECTING INPUT AND OUTPUT MODULES


MELSEC-A

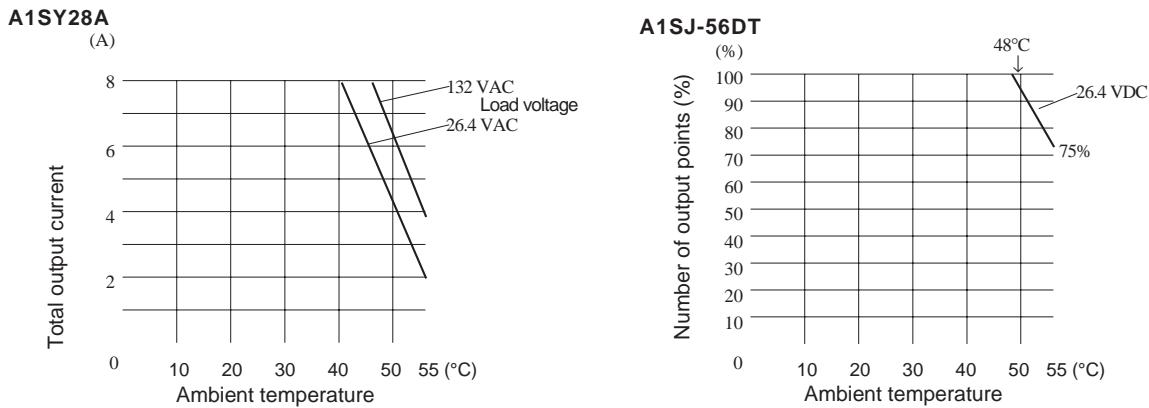

(6) The chart below shows the service life of relay output modules.

Select the appropriate modules, considering the direction given in (1).


(a) Applicable module: A1SY10, A1SY10EU, A1SJ-56DR, A1SX48Y18

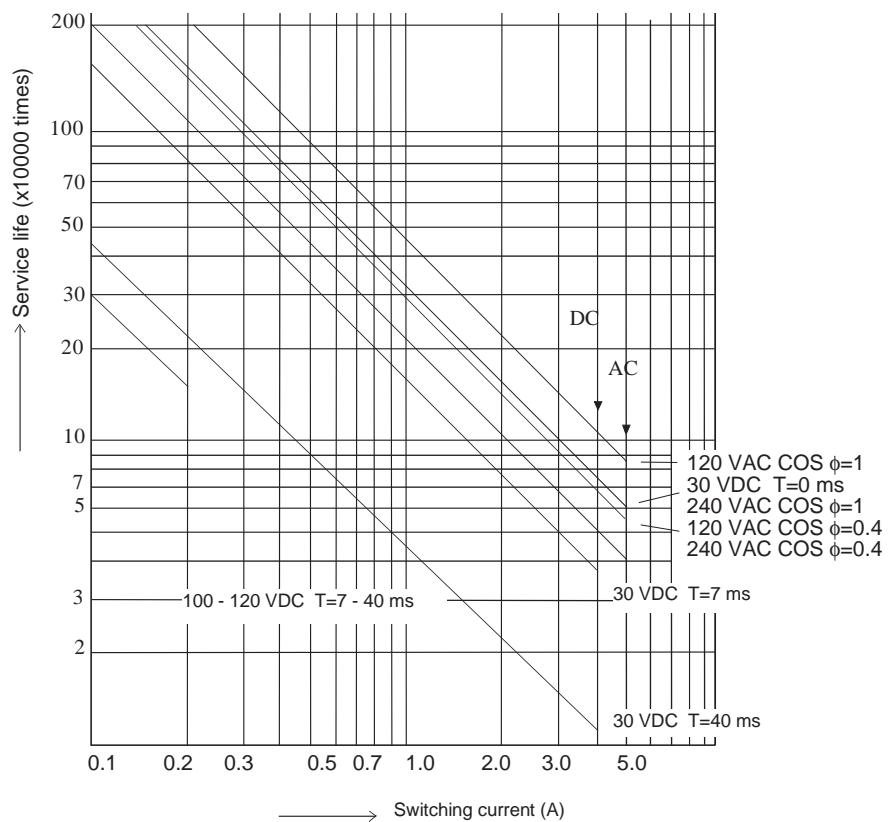

# 1. NOTES ON SELECTING INPUT AND OUTPUT MODULES

MELSEC-A


(b) Applicable module: A1SY14AEU

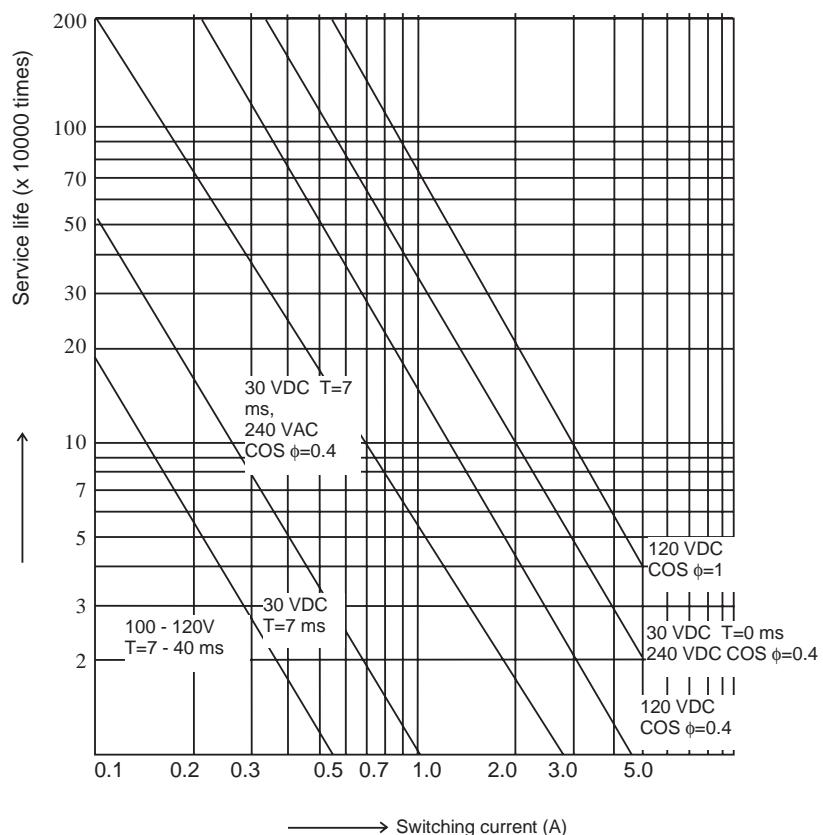

# 1. NOTES ON SELECTING INPUT AND OUTPUT MODULES

MELSEC-A


(c) Applicable module: A1SY18A, A1SY18AEU

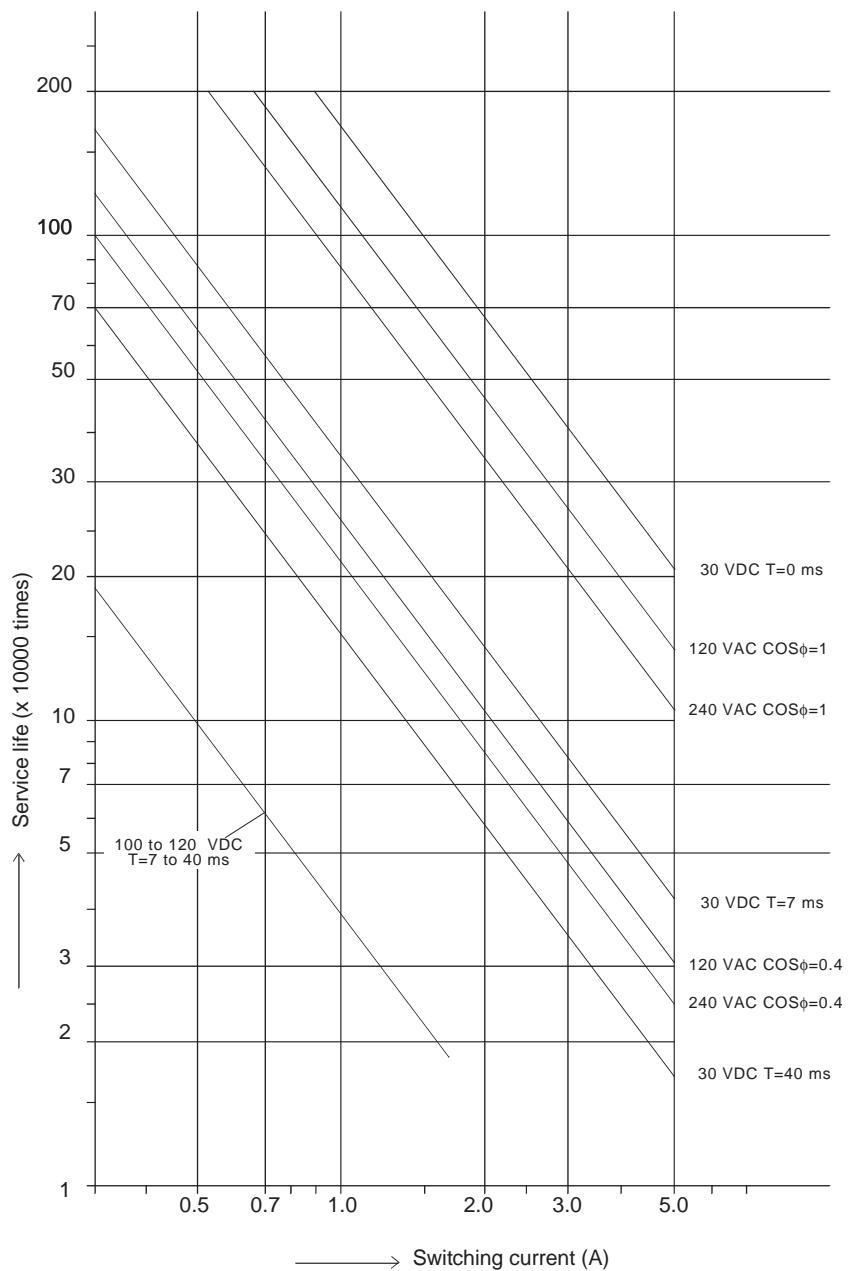

# 1. NOTES ON SELECTING INPUT AND OUTPUT MODULES

MELSEC-A

- (7) The common current of an A1SY60 varies according to ambient temperature. Select a common current referring to the chart shown below.

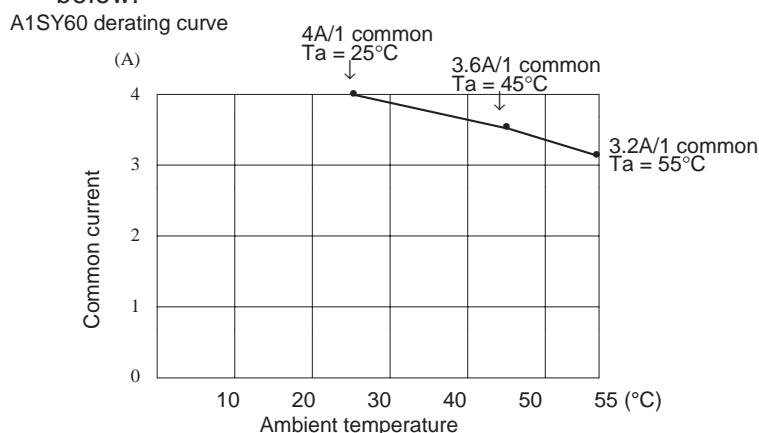

- (8) The A1SX41 and A1SX42 input modules and the A1SY41 and A1SY42 output modules are supplied with soldering-type 40-pin connectors. 40-pin connectors of the pressure-displacement type and crimp contact type are also available. Tools for the pressure-displacement and crimp contact type connectors must be procured from the following suppliers:

- (a) Soldering-type 40-pin connector

Model name : A6CON1

- (b) Crimp-contact-type 40-pin connector

Model name : A6CON2

Tool : Fujitsu FCN-363-T005/H

Applicable wire size : AWG #24 to 28

- (c) Pressure-displacement-type 40-pin connector

Model name : A6CON3

Tool : Fujitsu  
FCN-367T-T012/H (locator plate)  
FCN-707T-T001/H (cable cutter)  
FCN-707T-T101/H (hand press)

Applicable wire size : AWG #28 (twisted)  
AWG #30 (single wire)

(d) Supplier's offices:

Fujitsu Limited

North and South America:

Fujitsu Component of America, Inc.

3545 North First Street, San Jose, CA 95134-1804 U.S.A.

Phone: (408) 922-9000

Telex: (910) 338-0190

Fax: (408) 428-0640

Europe:

Fujitsu Microelectronik GmbH

Am Siebestein 6-10 6072, Dreieich-Buchshtag, F.R. Germany

Phone: (061) 03-690-0

Telex: 411963

Fax: (061) 03-690-122

Asia:

Fujitsu Microelectronics Asia PTE, Limited

#06-04 to #06-07 Plaza, By The Park, No.51 Bras Basah Road,

Singapore 0719

Phone: 336-1600

Telex: 55573

Fax: 336-1609

- (9) The 37-pin D sub-connector for the A1SX81 and A1SY81 is a soldering-type connector. Crimp-contact-type and pressure-displacement type 37-pin D sub-connectors are also available. Tools for the crimp-contact-type and pressure-displacement connectors must be procured by the user.

(a) Soldering-type 37-pin D sub-connector

Model name : A6CON1E

(b) Crimp-contact-type 37-pin D sub-connector

Model name : A6CON2E

Tool : AMP 90312-1

Applicable wire size : AWG #20 to 24

(c) Pressure-displacement-type 37-pin D sub-connector

Model name : A6CON3E

Tool : AMP  
91257-1 (die set)  
91220-1 (cable cutter)  
91085-2 (hand press)

Applicable wire size : AWG #28 (twisted)  
AWG #30 (single wire)

# 1. NOTES ON SELECTING INPUT AND OUTPUT MODULES

MELSEC-A

- (d) Contact for enquiries about tools for crimp-contact and pressure-displacement-type cables  
(The tools cited above are only examples: for more details, enquire at the contact given below.)

AMP Incorporated

Americas:

Worldwide Headquarters of AMP Incorporated  
Harrisburg, PA, U.S.A  
Phone: (717) 564-0100  
Fax: (717) 986-7813

Far East:

AMP Singapore Pte. Ltd.  
Singapore  
Phone: (65) 482-0311  
Fax: (65) 482-1012


Europe:

AMP Deutschland G.m.b.H.  
Langen, Germany  
Phone: (49) 6103-7090  
Fax: (49) 6103-709223


- (10) When using A1SX10EU, A1SX20EU, A1SY10EU, A1SY14EU, A1SY28EU, etc., if the wires are connected to the terminal block without using solderless terminals, observe the following points.

- (a) Bare the end of insulated wires to expose about 6 to 8 mm of naked wire.

When making connections, ensure that bared wire does project from the terminal block. If it does, it may close the gap to a distance shorter than that required for insulation between the terminals.

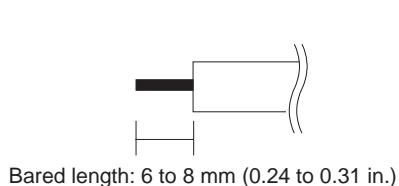

Treatment of end of wire



Connection to the terminal block  
(viewed from side)

- (b) If twisted wire is used, make sure that it does not unravel.

- (11) The noise resistance specification for I/O modules is the stipulated noise voltage applied with a noise simulator with a noise amplitude of 1 $\mu$ s and noise frequency of 25 to 60 Hz.

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2. INPUT MODULE SPECIFICATIONS

#### 2.1 A1SX10 AC Input Module

Model Specifications	AC Input Module		Appearance
	A1SX10		
Number of input points	16 points		
Isolation method	Photocoupler		
Rated input voltage	100 to 120 VAC 50/60 Hz		
Rated input current	Approx. 6 mA (100 VAC 60 Hz)		
Operating voltage range	85 to 132 VAC (50/60 Hz $\pm 5\%$ )		
Max. simultaneous input points	100% simultaneously ON (at 110 VAC) 60% simultaneously ON (at 132 VAC)		
Inrush current	Max. 200 mA, within 1 ms (132 VAC)		
ON voltage/ON current	80 VAC or higher/5 mA or higher		
OFF voltage/OFF current	30 VAC or lower/1 mA or lower		
Input impedance	Approx. 18 k $\Omega$ (60 Hz), Approx. 21 k $\Omega$ (50 Hz)		
Response time	OFF $\rightarrow$ ON 20 ms or less (100 VAC 60 Hz) ON $\rightarrow$ OFF 35 ms or less (100 VAC 60 Hz)		
Common terminal arrangement	16 points/common (common terminals: TB9, TB18)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Accessories	None		
Insulation withstand voltage	1500 VAC		
Noise immunity	1000 VAC		
Internal current consumption (5 VDC)	50 mA (TYP, all points ON)		
Weight kg (lb)	0.21 (0.46)		

External Connections	
Terminal No.	Signal Name
TB1	X00
TB2	X01
TB3	X02
TB4	X03
TB5	X04
TB6	X05
TB7	X06
TB8	X07
TB9	COM
TB10	X08
TB11	X09
TB12	X0A
TB13	X0B
TB14	X0C
TB15	X0D
TB16	X0E
TB17	X0F
TB18	COM
TB19	Vacant
TB20	Vacant

Internal circuit

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.2 A1SX10EU AC Input Module

Model Specifications	AC Input Module		Appearance
	A1SX10EU		
Number of input points	16 points		
Insulation method	Photocoupler		
Rated input voltage	100 to 120 VAC 50/60 Hz		
Rated input current	Approx. 7 mA (120 VAC 60 Hz)		
Operating voltage range	85 to 132 VAC (50/60 Hz ±5%)		
Max. simultaneous input points	100% simultaneously ON		
Inrush current	Max. 200 mA, within 1 ms (132 VAC)		
ON voltage/ON current	80 VAC or higher/5 mA or higher		
OFF voltage/OFF current	30 VAC or lower/1 mA or lower		
Input impedance	Approx. 18 kΩ (60 Hz), Approx. 21 kΩ (50 Hz)		
Response time	OFF → ON 20 ms or less (100 VAC 60 Hz) ON → OFF 35 ms or less (100 VAC 60 Hz)		
Common terminal arrangement	16 points/common (common terminals: TB9, TB18)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable crimp terminals	RAV1.25-3.5 (AWG15 to AWG19)		
Accessories	None		
Insulation withstand voltage	1780 VAC		
Noise immunity	1000 VAC		
Internal current consumption (5 VDC)	50 mA (TYP, all points ON)		
Weight kg (lb)	0.21 (0.46)		
External Connections			
<p>Internal circuit</p>			
Terminal No.	Signal Name		
TB1	X00		
TB2	X01		
TB3	X02		
TB4	X03		
TB5	X04		
TB6	X05		
TB7	X06		
TB8	X07		
TB9	COM		
TB10	X08		
TB11	X09		
TB12	X0A		
TB13	X0B		
TB14	X0C		
TB15	X0D		
TB16	X0E		
TB17	X0F		
TB18	COM		
TB19	Vacant		
TB20	Vacant		

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.3 A1SX20 AC Input Module

Model Specifications	AC Input Module		Appearance
	A1SX20		
Number of input points	16 points		
Isolation method	Photocoupler		
Rated input voltage	200 to 240 VAC 50/60 Hz		
Rated input current	Approx. 9 mA (200 VAC 60 Hz)		
Operating voltage range	170 to 264 VAC (50/60 Hz ±5%)		
Max. simultaneous input points	60% simultaneously ON (at 220 VAC)		
Inrush current	Max. 500 mA, within 1 ms (264 VAC)		
ON voltage/ON current	80 VAC or higher/4 mA or higher		
OFF voltage/OFF current	30 VAC or lower/1 mA or lower		
Input impedance	Approx. 22 kΩ (60 Hz), Approx. 27 kΩ (50 Hz)		
Response time	OFF → ON 30 ms or less (200 VAC 60 Hz) ON → OFF 55 ms or less (200 VAC 60 Hz)		
Common terminal arrangement	16 points/common (common terminals: TB9, TB18)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Accessories	None		
Insulation withstand voltage	1500 VAC		
Noise immunity	1500 VAC		
Internal current consumption (5 VDC)	50 mA (TYP, all points ON)		
Weight kg (lb)	0.23 (0.50)		
External Connections			
<p style="text-align: center;"><b>Internal circuit</b></p>			
Terminal No.	Signal Name		
TB1	X00		
TB2	X01		
TB3	X02		
TB4	X03		
TB5	X04		
TB6	X05		
TB7	X06		
TB8	X07		
TB9	COM		
TB10	X08		
TB11	X09		
TB12	X0A		
TB13	X0B		
TB14	X0C		
TB15	X0D		
TB16	X0E		
TB17	X0F		
TB18	COM		
TB19	Vacant		
TB20	Vacant		

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.4 A1SX20EU AC Input Module

Model Specifications	AC Input Module		Appearance
	A1SX20EU		
Number of input points	16 points		
Insulation method	Photocoupler		
Rated input voltage	200 to 240 VAC 50/60 Hz		
Rated input current	Approx. 11 mA (240 VAC 60 Hz)		
Operating voltage range	170 to 264 VAC (50/60 Hz ±5%)		
Max. simultaneous input points	60% simultaneously ON (at 220 VAC)		
Inrush current	Max. 500 mA, within 1 ms (264 VAC)		
ON voltage/ON current	80 VAC or higher/4 mA or higher		
OFF voltage/OFF current	30 VAC or lower/1 mA or lower		
Input impedance	Approx. 22 kΩ (60 Hz), Approx. 27 kΩ (50 Hz)		
Response time	OFF → ON 30 ms or less (200 VAC 60 Hz) ON → OFF 55 ms or less (200 VAC 60 Hz)		
Common terminal arrangement	16 points/common (common terminals: TB9, TB18)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable crimp terminals	RAV1.25-3.5 (AWG15 to AWG19)		
Accessories	None		
Insulation withstand voltage	2830 VAC		
Noise immunity	1000 VAC		
Internal current consumption (5 VDC)	50 mA (TYP, all points ON)		
Weight kg (lb)	0.23 (0.50)		
External Connections			
Terminal No.	Signal Name		
TB1	X00		
TB2	X01		
TB3	X02		
TB4	X03		
TB5	X04		
TB6	X05		
TB7	X06		
TB8	X07		
TB9	COM		
TB10	X08		
TB11	X09		
TB12	X0A		
TB13	X0B		
TB14	X0C		
TB15	X0D		
TB16	X0E		
TB17	X0F		
TB18	COM		
TB19	Vacant		
TB20	Vacant		

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.5 A1SX30 DC/AC Input Module

Model Specifications	DC/AC Input Module		Appearance																																										
	A1SX30																																												
Number of input points	16 points																																												
Isolation method	Photocoupler																																												
Rated input voltage	12/24 VDC	12/24 VAC 50/60 Hz																																											
Rated input current	4.2 mA (12 VDC/VAC), 8.6 mA (24 VDC/VAC)																																												
Operating voltage range	10.2 to 26.4 VDC (ripple: less than 5%)	10.2 to 26.4 VAC (50/60 Hz ±5%)																																											
Max. simultaneous input points	75% simultaneously ON (at 26.4 VDC)																																												
ON voltage/ON current	7 VDC/AC or higher/2 mA or higher																																												
OFF voltage/OFF current	2.7 VDC/AC or lower/0.7 mA or lower																																												
Input impedance	Approx. 2.7 kΩ																																												
Response time	OFF → ON	20 ms or less (12/24 VDC )	25 ms or less (12/24 VAC 60Hz)																																										
	ON → OFF	20 ms or less (12/24 VDC )	20 ms or less (12/24 VAC 60Hz)																																										
Common terminal arrangement	16 points/common (common terminals: TB9, TB18)																																												
Operating indicator	ON state is indicated (LEDs)																																												
External connections	20-point terminal block connector (M3.5 x 7 screws)																																												
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>																																												
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5																																												
Accessories	None																																												
Insulation withstand voltage	500 VAC																																												
Noise immunity	1500 VAC																																												
Internal current consumption (5 VDC)	50 mA (TYP, all points ON)																																												
Weight kg (lb)	0.2 (0.44)																																												
External Connections																																													
Internal circuit																																													
<table border="1"> <thead> <tr> <th>Terminal No.</th> <th>Signal Name</th> </tr> </thead> <tbody> <tr> <td>TB1</td> <td>X00</td> </tr> <tr> <td>TB2</td> <td>X01</td> </tr> <tr> <td>TB3</td> <td>X02</td> </tr> <tr> <td>TB4</td> <td>X03</td> </tr> <tr> <td>TB5</td> <td>X04</td> </tr> <tr> <td>TB6</td> <td>X05</td> </tr> <tr> <td>TB7</td> <td>X06</td> </tr> <tr> <td>TB8</td> <td>X07</td> </tr> <tr> <td>TB9</td> <td>COM</td> </tr> <tr> <td>TB10</td> <td>X08</td> </tr> <tr> <td>TB11</td> <td>X09</td> </tr> <tr> <td>TB12</td> <td>X0A</td> </tr> <tr> <td>TB13</td> <td>X0B</td> </tr> <tr> <td>TB14</td> <td>X0C</td> </tr> <tr> <td>TB15</td> <td>X0D</td> </tr> <tr> <td>TB16</td> <td>X0E</td> </tr> <tr> <td>TB17</td> <td>X0F</td> </tr> <tr> <td>TB18</td> <td>COM</td> </tr> <tr> <td>TB19</td> <td>Vacant</td> </tr> <tr> <td>TB20</td> <td>Vacant</td> </tr> </tbody> </table>				Terminal No.	Signal Name	TB1	X00	TB2	X01	TB3	X02	TB4	X03	TB5	X04	TB6	X05	TB7	X06	TB8	X07	TB9	COM	TB10	X08	TB11	X09	TB12	X0A	TB13	X0B	TB14	X0C	TB15	X0D	TB16	X0E	TB17	X0F	TB18	COM	TB19	Vacant	TB20	Vacant
Terminal No.	Signal Name																																												
TB1	X00																																												
TB2	X01																																												
TB3	X02																																												
TB4	X03																																												
TB5	X04																																												
TB6	X05																																												
TB7	X06																																												
TB8	X07																																												
TB9	COM																																												
TB10	X08																																												
TB11	X09																																												
TB12	X0A																																												
TB13	X0B																																												
TB14	X0C																																												
TB15	X0D																																												
TB16	X0E																																												
TB17	X0F																																												
TB18	COM																																												
TB19	Vacant																																												
TB20	Vacant																																												

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.6 A1SX40(S1/S2) DC Input Module (Sink Type)

Model Specifications	DC Input Module (Sink Type)			Appearance																																										
	A1SX40	A1SX40-S1	A1SX40-S2																																											
Number of input points	16 points																																													
Isolation method	Photocoupler																																													
Rated input voltage	12 VDC	24 VDC	24 VDC																																											
Rated input current	Approx. 3 mA	Approx. 7 mA	Approx. 7 mA																																											
Operating voltage range	10.2 to 26.4 VDC (ripple: less than 5%)		19.2 to 26.4 VDC (ripple: less than 5%)																																											
Max. simultaneous input points	100% simultaneously ON (at 26.4 VDC)																																													
ON voltage/ON current	8 VDC or higher/2 mA or higher	14 VDC or higher/4 mA or higher	14 VDC or higher/3.5 mA or higher																																											
OFF voltage/OFF current	4 VDC or lower/1 mA or lower	6.5 VDC or lower/1.7 mA or lower																																												
Input resistance	Approx. 3.3 kΩ																																													
Re-response time	OFF → ON	10 ms or less (24 VDC)	0.1 ms or less (24 VDC)	10 ms or less (24 VDC)																																										
	ON → OFF	10 ms or less (24 VDC)	0.2 ms or less (24 VDC)	10 ms or less (24 VDC)																																										
Common terminal arrangement	16 points/common (common terminals: TB9, TB18)																																													
Operating indicator	ON state is indicated (LEDs)																																													
External connections	20-point terminal block connector (M3.5 x 7 screws)																																													
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>																																													
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5																																													
Accessories	None																																													
Insulation withstand voltage	500 VAC																																													
Noise immunity	500 VAC																																													
Internal current consumption (5 VDC)	50 mA (TYP, all points ON)																																													
Weight kg (lb)	0.2(0.44)																																													
External Connections																																														
Internal circuit																																														
<table border="1"> <thead> <tr> <th>Terminal No.</th> <th>Signal Name</th> </tr> </thead> <tbody> <tr><td>TB1</td><td>X00</td></tr> <tr><td>TB2</td><td>X01</td></tr> <tr><td>TB3</td><td>X02</td></tr> <tr><td>TB4</td><td>X03</td></tr> <tr><td>TB5</td><td>X04</td></tr> <tr><td>TB6</td><td>X05</td></tr> <tr><td>TB7</td><td>X06</td></tr> <tr><td>TB8</td><td>X07</td></tr> <tr><td>TB9</td><td>COM</td></tr> <tr><td>TB10</td><td>X08</td></tr> <tr><td>TB11</td><td>X09</td></tr> <tr><td>TB12</td><td>X0A</td></tr> <tr><td>TB13</td><td>X0B</td></tr> <tr><td>TB14</td><td>X0C</td></tr> <tr><td>TB15</td><td>X0D</td></tr> <tr><td>TB16</td><td>X0E</td></tr> <tr><td>TB17</td><td>X0F</td></tr> <tr><td>TB18</td><td>COM</td></tr> <tr><td>TB19</td><td>Vacant</td></tr> <tr><td>TB20</td><td>Vacant</td></tr> </tbody> </table>					Terminal No.	Signal Name	TB1	X00	TB2	X01	TB3	X02	TB4	X03	TB5	X04	TB6	X05	TB7	X06	TB8	X07	TB9	COM	TB10	X08	TB11	X09	TB12	X0A	TB13	X0B	TB14	X0C	TB15	X0D	TB16	X0E	TB17	X0F	TB18	COM	TB19	Vacant	TB20	Vacant
Terminal No.	Signal Name																																													
TB1	X00																																													
TB2	X01																																													
TB3	X02																																													
TB4	X03																																													
TB5	X04																																													
TB6	X05																																													
TB7	X06																																													
TB8	X07																																													
TB9	COM																																													
TB10	X08																																													
TB11	X09																																													
TB12	X0A																																													
TB13	X0B																																													
TB14	X0C																																													
TB15	X0D																																													
TB16	X0E																																													
TB17	X0F																																													
TB18	COM																																													
TB19	Vacant																																													
TB20	Vacant																																													

\*1: A1SX40-S1/S2 is 24 VDC only.

## 2. INPUT MODULE SPECIFICATIONS


MELSEC-A

### 2.7 A1SX41(S2) DC Input Module (Sink Type)

Specifications	Model		DC Input Module (Sink Type)		Appearance
	A1SX41	A1SX41-S2			
Number of input points	32 points				
Isolation method	Photocoupler				
Rated input voltage	12 VDC	24 VDC	24 VDC		
Rated input current	Approx. 3 mA	Approx. 7 mA	Approx. 7 mA		
Operating voltage range	10.2 to 26.4 VDC (ripple: less than 5%)		19.2 to 26.4 VDC (ripple: less than 5%)		
Max. simultaneous input points	60% (20 points/common) simultaneously ON (at 26.4 VDC)				
ON voltage/ON current	8 VDC or higher/2 mA or higher		14 VDC or higher/3.5 mA or higher		
OFF voltage/OFF current	4 VDC or lower/1 mA or lower		6.5 VDC or lower/1.7 mA or lower		
Input resistance	Approx. 3.3 kΩ				
Response time	OFF → ON	10 ms or less (24 VDC)			
	ON → OFF	10 ms or less (24 VDC)			
Common terminal arrangement	32 points/common (common terminals: B1, B2)				
Operating indicator	ON state is indicated (LEDs)				
External connections	40-pin connector				
Applicable wire size	0.3 mm <sup>2</sup>				
Accessories	Connector (1 pce.) for external wiring (soldering type)				
Insulation withstand voltage	500 VAC				
Noise immunity	500 VAC				
Internal current consumption (5 VDC)	80 mA (TYP, all points ON)				
Weight kg (lb)	0.21(0.46)				

External Connections					
Pin Arrangement	Pin No.	Signal Name (FH)	Pin No.	Signal Name (FH)	
B20	X00	A20	X10		
B19	X01	A19	X11		
B18	X02	A18	X12		
B17	X03	A17	X13		
B16	X04	A16	X14		
B15	X05	A15	X15		
B14	X06	A14	X16		
B13	X07	A13	X17		
B12	X08	A12	X18		
B11	X09	A11	X19		
B10	X0A	A10	X1A		
B9	X0B	A9	X1B		
B8	X0C	A8	X1C		
B7	X0D	A7	X1D		
B6	X0E	A6	X1E		
B5	X0F	A5	X1F		
B4	Vacant	A4	Vacant		
B3	Vacant	A3	Vacant		
B2	COM	A2	Vacant		
B1	COM	A1	Vacant		

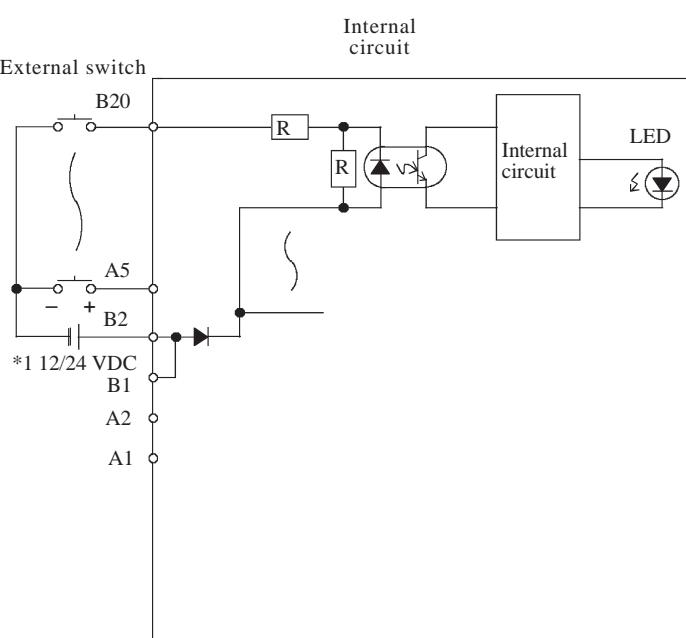

\*1: A1SX42-S2 is 24 VDC only.


\*2: The arrangement of pins A and B shown above is the opposite of the arrangement of pins of the connector on the module.


## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

## 2.8 A1SX42(S2) DC Input Module (Sink Type)

Model	DC Input Module (Sink Type)					
	A1SX42	A1SX42-S2				
Specifications				Appearance		
Number of input points	64 points					
Isolation method	Photocoupler					
Rated input voltage	12 VDC	24 VDC	24 VDC			
Rated input current	Approx. 2 mA	Approx. 5 mA	Approx. 5 mA			
Operating voltage range	10.2 to 26.4 VDC (ripple: less than 5%)	19.2 to 26.4 VDC (ripple: less than 5%)				
Max. simultaneous input points	50% (16 points/common) simultaneously ON (at 24 VDC)					
ON voltage/ON current	8 VDC or higher/2 mA or higher	17.5 VDC or higher/3.5 mA or higher				
OFF voltage/OFF current	4 VDC or lower/0.6 mA or lower	7 VDC or lower/1.7 mA or lower				
Input resistance	Approx. 5 kΩ	Approx. 4.7 kΩ				
Response time	OFF → ON	10 ms or less (24 VDC)				
	ON → OFF	10 ms or less (24 VDC)				
Common terminal arrangement	32 points/common (common terminals: 1B1, 1B2, 2B1, 2B2)					
Operating indicator	ON state is indicated (LEDs), 32-bit indication by switch					
External connections	40-pin connector					
Applicable wire size	0.3 mm <sup>2</sup>					
Accessories	Connectors (2 pces.) for external wiring (soldering type)					
Insulation withstand voltage	500 VAC					
Noise immunity	500 VAC					
Internal current consumption (5 VDC)	90 mA (TYP, all points ON)					
Weight kg (lb)	0.28(0.62)					

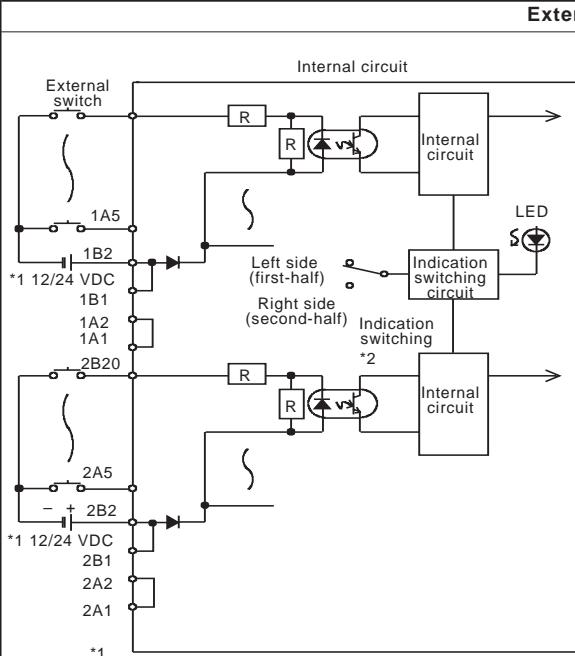

Pin Arrangement	Pin No.	Signal Name (FH)	Pin No.	Signal Name (FH)	Pin No.	Signal Name (SH)	Pin No.	Signal Name (SH)
 <b>Front view</b>	1B20	X00	1A20	X10	2B20	X20	2A20	X30
	1B19	X01	1A19	X11	2B19	X21	2A19	X31
	1B18	X02	1A18	X12	2B18	X22	2A18	X32
	1B17	X03	1A17	X13	2B17	X23	2A17	X33
	1B16	X04	1A16	X14	2B16	X24	2A16	X34
	1B15	X05	1A15	X15	2B15	X25	2A15	X35
	1B14	X06	1A14	X16	2B14	X26	2A14	X36
	1B13	X07	1A13	X17	2B13	X27	2A13	X37
	1B12	X08	1A12	X18	2B12	X28	2A12	X38
	1B11	X09	1A11	X19	2B11	X29	2A11	X39
	1B10	X0A	1A10	X1A	2B10	X2A	2A10	X3A
	1B9	X0B	1A9	X1B	2B9	X2B	2A9	X3B
	1B8	X0C	1A8	X1C	2B8	X2C	2A8	X3C
	1B7	X0D	1A7	X1D	2B7	X2D	2A7	X3D
	1B6	X0E	1A6	X1E	2B6	X2E	2A6	X3E
	1B5	X0F	1A5	X1F	2B5	X2F	2A5	X3F
	1B4	Vacant	1A4	Vacant	2B4	Vacant	2A4	Vacant
	1B3	Vacant	1A3	Vacant	2B3	Vacant	2A3	Vacant
	1B2	COM1	1A2	Vacant	2B2	COM2	2A2	Vacant
	1B1	COM1	1A1	Vacant	2B1	COM2	2A1	Vacant

\*1: A1SX42-S2 is 24 VDC only.

\*2: In the pin number column, the pins beginning with "1[ ][ ]" are left connector pins and those beginning with "2[ ][ ]" are right connector pins.

\*3: When the switch is set to the left side position, the status of the first-half devices (X00 to X1F) is displayed by the LEDs. When it is set to the right side, the status of the second-half devices (X20 to X3F) is displayed by the LEDs.

\*4: The arrangement of pins A and B shown above is the opposite of the arrangement of pins of the connector on the module.

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.9 A1SX71 DC Input Module (Sink/Source Common Type)

Specifications	Model			Appearance
	DC Input Module (Sink/Source Common Type) A1SX71			
Number of input points	32 points			
Isolation method	Photocoupler			
Rated input voltage	5 VDC	12 VDC	24 VDC *1	
Rated input current	1.2 mA	3.3 mA	7 mA	
Operating voltage range	4.5 to 26.4 VDC (ripple: less than 5%)			
Max. simultaneous input points	65% (20 points/common) simultaneously ON (at 24 VDC)			
ON voltage/ON current	3.5 VDC or higher/1 mA or higher			
OFF voltage/OFF current	1.0 VDC or lower/0.1 mA or lower			
Input resistance	Approx. 3.5 kΩ			
Response time	OFF → ON	1.5 ms or less		
	ON → OFF	3 ms or less		
Common terminal arrangement	32 points/common (common terminals: B1, B2)			
Operating indicator	ON state is indicated (LEDs)			
External connections	40-pin connector			
Applicable wire size	0.3 mm <sup>2</sup>			
Accessories	Connector (1 pce.) for external wiring (soldering type)			
Insulation withstand voltage	500 VAC			
Noise immunity	250 VAC			
Internal current consumption (5 VDC)	75 mA (TYP, all points ON)			
Weight kg (lb)	0.19 (0.42)			

External Connections				
Pin Arrangement	Pin No.	Signal Name	Pin No.	Signal Name
B20	X00	A20	X10	
B19	X01	A19	X11	
B18	X02	A18	X12	
B17	X03	A17	X13	
B16	X04	A16	X14	
B15	X05	A15	X15	
B14	X06	A14	X16	
B13	X07	A13	X17	
B12	X08	A12	X18	
B11	X09	A11	X19	
B10	X0A	A10	X1A	
B9	X0B	A9	X1B	
B8	X0C	A8	X1C	
B7	X0D	A7	X1D	
B6	X0E	A6	X1E	
B5	X0F	A5	X1F	
B4	Vacant	A4	Vacant	
B3	Vacant	A3	Vacant	
B2	COM	A2	Vacant	
B1	COM	A1	Vacant	

Front view

\*1: 24 VDC can be used with hardware version B and later versions.


\*2: The arrangement of pins A and B shown above is the opposite of the arrangement of pins of the connector on the module.

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.10 A1SX80(S1/S2) DC Input Module (Sink/Source Common Type)

Specifications	DC Input Module (Sink/Source Common Type)			Appearance																																										
	A1SX80	A1SX80-S1	A1SX80-S2																																											
Number of input points	16 points																																													
Isolation method	Photocoupler																																													
Rated input voltage	12 VDC	24 VDC	24 VDC																																											
Rated input current	Approx. 3 mA	Approx. 7 mA	Approx. 7 mA																																											
Operating voltage range	10.2 to 26.4 VDC (ripple: less than 5%)	19.2 to 26.4 VDC (ripple: less than 5%)																																												
Max. simultaneous input points	100% simultaneously ON (at 26.4 VDC)																																													
ON voltage/ON current	8 VDC or higher/2 mA or higher	17 VDC or higher/5 mA or higher	13 VDC or higher/3.5 mA or higher																																											
OFF voltage/OFF current	4 VDC or lower/1 mA or lower	5 VDC or lower/1.7 mA or lower	6 VDC or lower/1.7 mA or lower																																											
Input resistance	Approx. 3.3 kΩ																																													
Response time	OFF → ON	10 ms or less (24 VDC)	0.4 ms or less (24 VDC)	10 ms or less (24 VDC)																																										
	ON → OFF	10 ms or less (24 VDC)	0.5 ms or less (24 VDC)	10 ms or less (24 VDC)																																										
Common terminal arrangement	16 points/common (common terminals: TB9, TB18)																																													
Operating indicator	ON state is indicated (LEDs)																																													
External connections	20-point terminal block connector (M3.5 x 7 screws)																																													
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>																																													
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5																																													
Accessories	None																																													
Insulation withstand voltage	500 VAC																																													
Noise immunity	1000 VAC																																													
Internal current consumption (5 VDC)	50 mA (TYP, all points ON)																																													
Weight kg (lb)	0.2(0.44)																																													
<b>External Connections</b>																																														
<p>*1: A1SX80-S1/S2 is 24 VDC only.</p>																																														
<table border="1"> <thead> <tr> <th>Terminal No.</th> <th>Signal Name</th> </tr> </thead> <tbody> <tr> <td>TB1</td> <td>X00</td> </tr> <tr> <td>TB2</td> <td>X01</td> </tr> <tr> <td>TB3</td> <td>X02</td> </tr> <tr> <td>TB4</td> <td>X03</td> </tr> <tr> <td>TB5</td> <td>X04</td> </tr> <tr> <td>TB6</td> <td>X05</td> </tr> <tr> <td>TB7</td> <td>X06</td> </tr> <tr> <td>TB8</td> <td>X07</td> </tr> <tr> <td>TB9</td> <td>COM</td> </tr> <tr> <td>TB10</td> <td>X08</td> </tr> <tr> <td>TB11</td> <td>X09</td> </tr> <tr> <td>TB12</td> <td>X0A</td> </tr> <tr> <td>TB13</td> <td>X0B</td> </tr> <tr> <td>TB14</td> <td>X0C</td> </tr> <tr> <td>TB15</td> <td>X0D</td> </tr> <tr> <td>TB16</td> <td>X0E</td> </tr> <tr> <td>TB17</td> <td>X0F</td> </tr> <tr> <td>TB18</td> <td>COM</td> </tr> <tr> <td>TB19</td> <td>Vacant</td> </tr> <tr> <td>TB20</td> <td>Vacant</td> </tr> </tbody> </table>					Terminal No.	Signal Name	TB1	X00	TB2	X01	TB3	X02	TB4	X03	TB5	X04	TB6	X05	TB7	X06	TB8	X07	TB9	COM	TB10	X08	TB11	X09	TB12	X0A	TB13	X0B	TB14	X0C	TB15	X0D	TB16	X0E	TB17	X0F	TB18	COM	TB19	Vacant	TB20	Vacant
Terminal No.	Signal Name																																													
TB1	X00																																													
TB2	X01																																													
TB3	X02																																													
TB4	X03																																													
TB5	X04																																													
TB6	X05																																													
TB7	X06																																													
TB8	X07																																													
TB9	COM																																													
TB10	X08																																													
TB11	X09																																													
TB12	X0A																																													
TB13	X0B																																													
TB14	X0C																																													
TB15	X0D																																													
TB16	X0E																																													
TB17	X0F																																													
TB18	COM																																													
TB19	Vacant																																													
TB20	Vacant																																													

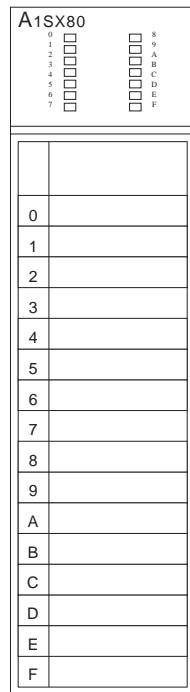

## 2. INPUT MODULE SPECIFICATIONS

MELSEC-A

### 2.11 A1SX81(S2) DC Input Module (Sink/Source Common Type)

Specifications	Model		DC Input Module (Sink/Source Common Type)	Appearance			
	A1SX81	A1SX81-S2					
Number of input points	32 points						
Isolation method	Photocoupler						
Rated input voltage	12 VDC	24 VDC	24 VDC				
Rated input current	Approx. 3 mA	Approx. 7 mA	Approx. 7 mA				
Operating voltage range	10.2 to 26.4 VDC (ripple: less than 5%)		19.2 to 26.4 VDC (ripple: less than 5%)				
Max. simultaneous input points	60% simultaneously ON (at 26.4 VDC)						
ON voltage/ON current	8 VDC or higher/2 mA or higher		13 VDC or higher/3.5 mA or higher				
OFF voltage/OFF current	4 VDC or lower/1 mA or lower		6 VDC or lower/1.7 mA or lower				
Input resistance	Approx. 3.3 kΩ						
Response time	OFF → ON	10 ms or less (24 VDC)					
	ON → OFF	10 ms or less (24 VDC)					
Common terminal arrangement	32 points/common (common terminals: 17, 18, 36)						
Operating indicator	ON state is indicated (LEDs)						
External connections	37-pin D sub-connector						
Applicable wire size	0.3 mm <sup>2</sup>						
Accessories	Connector (1 pce.) for external wiring (soldering type)						
Insulation withstand voltage	500 VAC						
Noise immunity	1000 VAC						
Internal current consumption (5 VDC)	80 mA (TYP, all points ON)						
Weight kg (lb)	0.24(0.53)						
<b>External Connections</b>							
<b>Front view</b>							

\*1: A1SX81-S2 is 24 VDC only.

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3. OUTPUT MODULE SPECIFICATIONS

##### 3.1 A1SY10 Contact Output Module

Model		Contact Output Module		
Specifications		A1SY10		Appearance
Number of output points	16 points			
Isolation method	Photocoupler			
Switching rated voltage/current	24 VDC 2 A (load resistance) 240 VAC 2 A ( $\text{COS}\phi = 1$ )	/1 point, 8 A/common		
Min. switching load	5 VDC 1 mA			
Max. switching voltage	264 VAC 125 VDC			
Response time	OFF → ON	10 ms or less		
	ON → OFF	12 ms or less		
Service life	Mechanical	More than 20 million times		
	Electrical	Switching rated voltage/current More than 100000 times		
		200 VAC 1.5 A, 240 VAC 1 A ( $\text{COS}\phi = 0.7$ ) More than 100000 times or more		
		200 VAC 1 A, 240 VAC 0.5 A ( $\text{COS}\phi = 0.35$ ) More than 100000 times		
		24 VDC 1 A, 100 VDC 0.1 A ( $L/R = 7 \text{ ms}$ ) More than 100000 times		
Max. switching frequency	3600 times per hour			
Surge absorber	None			
Fuse	None			
Common terminal arrangement	8 points/common (common terminals: TB9, TB18)			
Operating indicator	ON state is indicated (LEDs)			
External connections	20-point terminal block connector (M3.5 x 7 screws)			
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>			
Applicable solderless terminals	R1.25-3.5 R2-3.5 RAV1.25-3.5 RAV2-3.5			
Accessories	None			
Insulatoin withstand voltage	1500 VAC			
Noise immunity	1000 VAC			
External power supply	Voltage	24 VDC ±10%, Ripple voltage: 4VP-P or less		
	Current	90 mA (TYP 24 VDC all points ON)		
Internal current consumption (5 VDC)	120 mA (TYP, all points ON)			
Weight kg (lb)	0.25 (0.55)			
External Connections				
Internal circuit		External load	External power supply	Terminal No.
				Signal Name
				TB1 Y00
				TB2 Y01
				TB3 Y02
				TB4 Y03
				TB5 Y04
				TB6 Y05
				TB7 Y06
				TB8 Y07
				TB9 COM1
				TB10 Y08
				TB11 Y09
				TB12 Y0A
				TB13 Y0B
				TB14 Y0C
				TB15 Y0D
				TB16 Y0E
				TB17 Y0F
				TB18 COM2
				TB19 24 VDC
				TB20 0V


### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.2 A1SY10EU Contact Output Module

Model Specifications	Contact Output Module		Appearance
	A1SY10EU		
Number of output points	16 points		
Insulation method	Photocoupler		
Switching rated voltage/current	24 VDC 2 A (load resistance) /1 point, 8 A/common 120 VAC 2 A ( $\text{COS}\phi = 1$ )		
Min. switching load	5 VDC 1 mA		
Max. switching voltage	132 VAC 125 VDC		
Response time	OFF → ON ON → OFF	10 ms or less 12 ms or less	
Service life	Mechanical	More than 20 million times or more	
	Electrical	Switching rated voltage/current More than 200000 times or more 100 VAC 2A, 120 VAC 2 A ( $\text{COS}\phi = 0.7$ ) More than 200000 times or more 100 VAC 2A, 120 VAC 2 A ( $\text{COS}\phi = 0.35$ ) More than 100000 times or more 24 VDC 1.5A, 100 VDC 0.1 A (L/R = 7 ms) More than 100000 times or more	
Max. switching frequency	3600 times per hour		
Surge absorber	None		
Fuse	None		
Common terminal arrangement	8 points/common (common terminals: TB9, TB18)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup> (AWG16 to AWG19)		
Applicable crimp terminals	RAV1.25-3.5		
Accessories	None		
Insulation withstand voltage	AC terminals-Relay coil, 5 VAC	1780 VAC	
	Relay coil, 5 VAC	500 VAC	
Noise immunity	1000 VAC		
External power supply	Voltage Current	24 VDC ±10%, Ripple voltage: 4VP-P or less 90 mA (TYP 24 VDC all points ON)	Must be a SELV power supply
Internal current consumption (5 VDC)	120 mA (TYP, all points ON)		
Weight kg (lb)	0.25 (0.55)		

#### External Connections

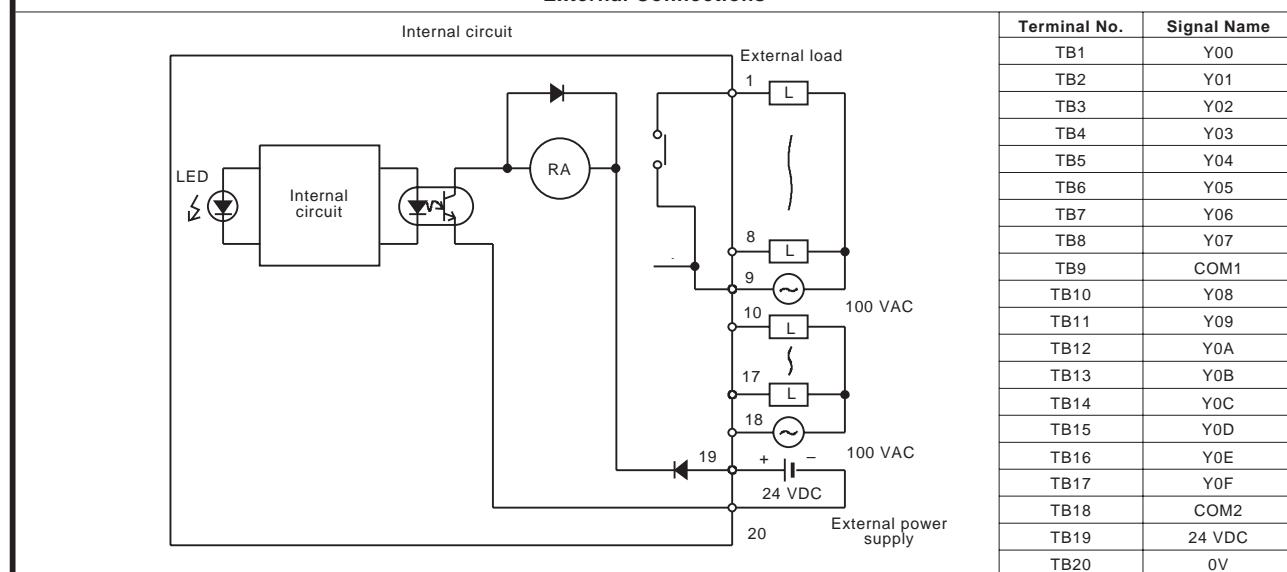

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A



#### 3.3 A1SY14EU Contact Output Module

Model		Contact Output Module		Appearance				
Specifications		A1SY14EU						
Number of output points		12 points (number of occupied I/O points : 16 points)						
Insulation method		Photocoupler						
Switching rated voltage/current		24 VDC 2 A (load resistance) /1 point, 8 A/common 240 VAC 2 A ( $\text{COS}\phi = 1$ )						
Min. switching load		5 VDC 1 mA						
Max. switching voltage		264VAC 125 VDC						
Response time	OFF → ON	10 ms or less						
	ON → OFF	12 ms or less						
Service life	Mechanical	More than 20 million times or more						
	Electrical	Switching rated voltage/current More than 200000 times or more						
		200 VAC 2A, 240VAC 1.8 A ( $\text{COS}\phi = 0.7$ ) More than 200000 times or more						
		200 VAC 1.1A, 240VAC 0.9 A ( $\text{COS}\phi = 0.35$ ) More than 200000 times or more						
		24 VDC 1.1A, 100 VDC 0.1 A ( $L/R = 7 \text{ ms}$ ) More than 200000 times or more						
Max. switching frequency		3600 times per hour						
Surge absorber		None						
Fuse		None						
Common terminal arrangement		4 points/common (common terminals: TB5, TB10, TB15)						
Operating indicator		ON state is indicated (LEDs)						
External connections		20-point terminal block connector (M3.5 x 7 screws)						
Applicable wire size		0.75 to 1.25 mm <sup>2</sup> (AWG16 to AWG19)						
Applicable crimp terminals		RAV1.25-3.5						
Accessories		None						
Insulation withstand voltage	AC terminals-Relay coil, 5VAC	2830VAC						
	Relay coil, 5VAC	500VAC						
Noise immunity		1000VAC						
External power supply	Voltage	24 VDC ±10%, Ripple voltage: 4VP-P or less		Must be a SELV power supply				
	Current	100 mA (TYP 24 VDC all points ON)						
Internal current consumption (5 VDC)		120 mA (TYP, all points ON)						
Weight kg (lb)		0.25 (0.55)						
External Connections								
Internal circuit								
Terminal No.								
TB1	Y00							
TB2	Y01							
TB3	Y02							
TB4	Y03							
TB5	COM1							
TB6	Y04							
TB7	Y05							
TB8	Y06							
TB9	Y07							
TB10	COM2							
TB11	Y08							
TB12	Y09							
TB13	Y0A							
TB14	Y0B							
TB15	COM3							
TB16	Vacant							
TB17	Vacant							
TB18	Vacant							
TB19	24 VDC							
TB20	0V							

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A


#### 3.4 A1SY18A Contact Output Module (All Points Independent)

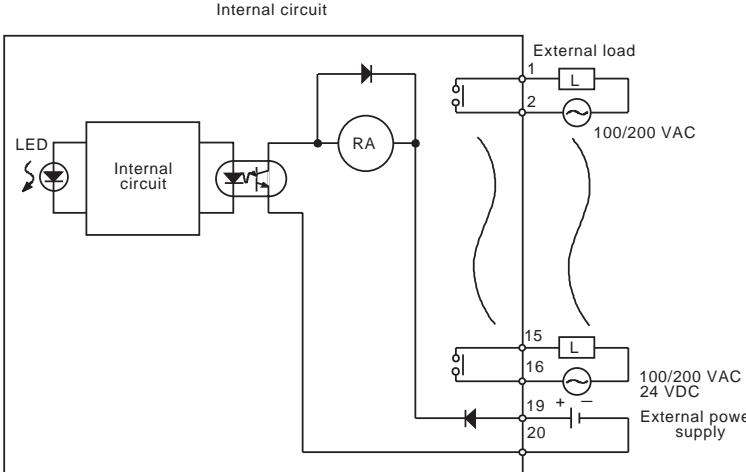Model		Contact Output Module			Appearance					
Specifications		A1SY18A								
Number of output points		8 points (number of occupied I/O points : 16 points)								
Isolation method		Photocoupler								
Switching rated voltage/current		24 VDC 2 A/point (load resistance) 240 VAC 2 A/point ( $\text{COS}\phi = 1$ )	24 VDC 240 VAC	8A/module 8A/module						
Min. switching load		5 VDC 1 mA								
Max. switching voltage		264 VAC 125 VDC								
Response time	OFF → ON	10 ms or less								
	ON → OFF	12 ms or less								
Service life	Mechanical	More than 20 million times								
	Electrical	Switching rated voltage/current More than 200000 times								
		200 VAC 1.5 A, 240 VAC 1 A ( $\text{COS}\phi = 0.7$ ) More than 200000 times								
		200 VAC 0.75 A, 240 VAC 0.5 A ( $\text{COS}\phi = 0.35$ ) More than 200000 times or more								
Max. switching frequency		3600 times per hour								
Surge absorber		None								
Fuse		None								
Common terminal arrangement		None (all points independent)								
Operating indicator		ON state is indicated (LEDs)								
External connections		20-point terminal block connector (M3.5 × 7 screws)								
Applicable wire size		0.75 to 1.25 mm <sup>2</sup>								
Applicable solderless terminals		R1.25-3.5 R2-3.5 RAV1.25-3.5 RAV2-3.5								
Accessories		None								
Insulation withstand voltage		1500 VAC								
Noise immunity		1000 VAC								
External power supply	Voltage	24 VDC ±10%, Ripple voltage: 4VP-P or less								
	Current	75 mA (TYP, 24 VDC all points ON)								
Internal current consumption (5 VDC)		240 mA (TYP, all points ON)								
Weight kg (lb)		0.25 (0.55)								
External Connections										
Internal circuit 										
Terminal No.	Signal Name									
TB1	Y00									
TB2	Y01									
TB3	Y02									
TB4	Y03									
TB5	Y04									
TB6	Y05									
TB7	Y06									
TB8	Y07									
TB9	Vacant									
TB10	Vacant									
TB11	24 VDC									
TB12	0 V									


### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.5 A1SY18AEU Contact Output Modules (All Points Independent)

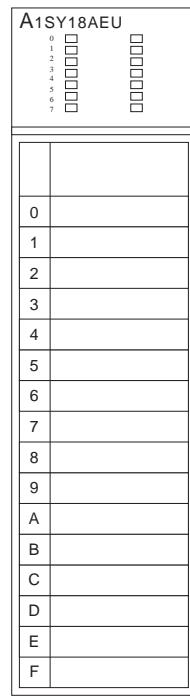Model Specifications	Contact Output Module		Appearance			
	A1SY18AEU					
Number of output points	8 points (number of occupied I/O points : 16 points)					
Insulation method	Photocoupler					
Switching rated voltage/current	24 VDC 2 A (load resistance) /1 point 240 VAC 2 A ( $\text{COS}\phi = 1$ )					
Min. switching load	5 VDC 1 mA					
Max. switching voltage	264VAC 125 VDC					
Response time	OFF → ON	10 ms or less				
	ON → OFF	12 ms or less				
Service life	Mechanical	More than 20 million times or more				
		Switching rated voltage/current More than 200000 times or more				
		200 VAC 1.5 A, 240VAC 1 A ( $\text{COS}\phi = 0.7$ ) More than 200000 times or more				
	Electrical	200 VAC 1 A, 240VAC 0.5 A ( $\text{COS}\phi = 0.35$ ) More than 200000 times or more				
		24 VDC 1 A, 100 VDC 0.1 A ( $L/R = 7 \text{ ms}$ ) More than 200000 times or more				
Max. switching frequency	3600 times per hour					
Surge absorber	None					
Fuse	None					
Common terminal arrangement	None (all points independent)					
Operating indicator	ON state is indicated (LEDs)					
External connections	20-point terminal block connector (M3.5 x 7 screws)					
Applicable wire size	0.75 to 1.25 mm <sup>2</sup> (AWG16 to AWG19)					
Applicable crimp terminals	RAV1.25-3.5					
Accessories	None					
Insulation withstand voltage	AC terminals-Relay coil, 5VAC	2830VAC				
	Relay coil, 5VAC	500VAC				
Noise immunity	1000VAC					
External power supply	Voltage	24 VDC ±10%, Ripple voltage: 4VP-P or less	Must be a SELV power supply			
	Current	75 mA (TYP 24 VDC all points ON)				
Internal current consumption (5 VDC)	240 mA (TYP, all points ON)					
Weight kg (lb)	0.25 (0.55)					

#### External Connections

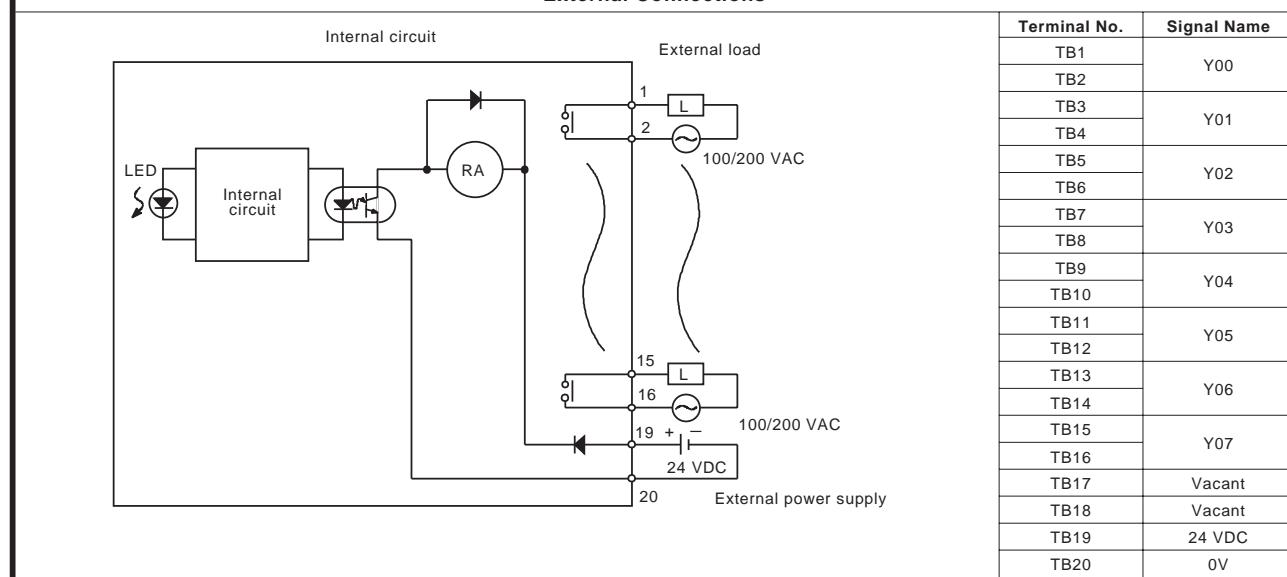

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.6 A1SY22 Triac Output Module

Model Specifications	Triac Output Module		Appearance
	A1SY22		
Number of output points	16 points		
Isolation method	Photocoupler		
Rated load voltage	100 to 240 VAC 50/60 Hz $\pm 3$ Hz		
Max. load voltage	264 VAC		
Max. load current	0.6 A/point, 2.4 A/common		
Min. load voltage/current	24 VAC 100 mA, 100 VAC 10 mA, 240 VAC 20 mA		
Max. allowed rush current	20 A 10 ms or less, 8 A 100 ms or less		
Leakage current at OFF circuit	1.5 mA (120 VAC 60 Hz), 3mA (240 VAC 60 Hz)		
Max. voltage drop at ON circuit	1.5 VAC or less (0.1 to 0.6 A), 1.8 VAC or less (50 to 100 mA), 2 VAC or less (10 to 50 mA)		
Response time	OFF $\rightarrow$ ON 1 ms or less ON $\rightarrow$ OFF 0.5 CYCLE + 1 ms or less		
Surge absorber	CR absorber (0.01 $\mu$ F + 47 $\Omega$ )		
Fuse rating	5 A (1 piece/common), not replaceable *1		
Fuse capacity	70 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *2		
Common terminal arrangement	8 points/common (common terminals: TB9, TB19)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Accessories	None		
Insulation withstand voltage	1500 VAC		
Noise immunity	1500 VAC		
External power supply	Voltage 100 to 240 VAC (85 to 264 VAC) Current 2 mA (TYP 200 VAC/common)		
Internal current consumption (5 VDC)	270 mA (TYP, all points ON)		
Weight kg (lb)	0.24 (0.53)		

External Connections																																											
	<table border="1"> <thead> <tr> <th>Terminal No.</th><th>Signal Name</th></tr> </thead> <tbody> <tr><td>TB1</td><td>Y00</td></tr> <tr><td>TB2</td><td>Y01</td></tr> <tr><td>TB3</td><td>Y02</td></tr> <tr><td>TB4</td><td>Y03</td></tr> <tr><td>TB5</td><td>Y04</td></tr> <tr><td>TB6</td><td>Y05</td></tr> <tr><td>TB7</td><td>Y06</td></tr> <tr><td>TB8</td><td>Y07</td></tr> <tr><td>TB9</td><td>COM1</td></tr> <tr><td>TB10</td><td>100/200 VAC</td></tr> <tr><td>TB11</td><td>Y08</td></tr> <tr><td>TB12</td><td>Y09</td></tr> <tr><td>TB13</td><td>Y0A</td></tr> <tr><td>TB14</td><td>Y0B</td></tr> <tr><td>TB15</td><td>Y0C</td></tr> <tr><td>TB16</td><td>Y0D</td></tr> <tr><td>TB17</td><td>Y0E</td></tr> <tr><td>TB18</td><td>Y0F</td></tr> <tr><td>TB19</td><td>COM2</td></tr> <tr><td>TB20</td><td>100/200 VAC</td></tr> </tbody> </table>	Terminal No.	Signal Name	TB1	Y00	TB2	Y01	TB3	Y02	TB4	Y03	TB5	Y04	TB6	Y05	TB7	Y06	TB8	Y07	TB9	COM1	TB10	100/200 VAC	TB11	Y08	TB12	Y09	TB13	Y0A	TB14	Y0B	TB15	Y0C	TB16	Y0D	TB17	Y0E	TB18	Y0F	TB19	COM2	TB20	100/200 VAC
Terminal No.	Signal Name																																										
TB1	Y00																																										
TB2	Y01																																										
TB3	Y02																																										
TB4	Y03																																										
TB5	Y04																																										
TB6	Y05																																										
TB7	Y06																																										
TB8	Y07																																										
TB9	COM1																																										
TB10	100/200 VAC																																										
TB11	Y08																																										
TB12	Y09																																										
TB13	Y0A																																										
TB14	Y0B																																										
TB15	Y0C																																										
TB16	Y0D																																										
TB17	Y0E																																										
TB18	Y0F																																										
TB19	COM2																																										
TB20	100/200 VAC																																										

\*1 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 : The ERR. indicating LED will also light when the external power supply is shut OFF.

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.7 A1SY28A Triac Output Module (All Points Independent)

Model Specifications	Triac Output Module		Appearance
	A1SY28A		
Number of output points	8 points (number of occupied I/O points : 16 points)		
Isolation method	Photocoupler		
Rated load voltage	100 to 240 VAC 50/60 Hz ±3 Hz		
Max. load voltage	264 VAC		
Max. load current	1 A/point, 4 A/module(132 VAC), 2 A/module(264 VAC)		
Min. load voltage/current	24 VAC 100 mA, 100 VAC 55 mA, 24 VAC 55 mA		
Max. allowed rush current	25 A 10 ms or less, 10 A 100 ms or less		
Leakage current at OFF circuit	1.5 mA (120 VAC 60 Hz), 3mA (240 VAC 60 Hz)		
Max. voltage drop at ON circuit	1.5 VAC or less (0.2 to 1 A), 1.8 VAC or less (0.1 to 0.2 A), 3 VAC or less (55 to 100 mA)		
Response time OFF → ON	1 ms or less		
ON → OFF	0.5 CYCLE + 1 ms or less		
Surge absorber	CR absorber (0.01 µF + 47 Ω), Varistor (387 to 473 V)		
Fuse rating	None		
Common terminal arrangement	None (all points independent)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 × 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Accessories	None		
Insulation withstand voltage	1500 VAC		
Noise immunity	1500 VAC		
External power supply	None		
Internal current consumption (5 VDC)	130 mA (TYP, all points ON)		
Weight kg (lb)	0.25 (0.55)		

External Connections	
Internal circuit	
TB1	Y00
TB2	Y01
TB3	Y02
TB4	Y03
TB5	Y04
TB6	Y05
TB7	Y06
TB8	Y07
TB9	Vacant
TB10	Vacant
TB11	Vacant
TB12	Vacant
TB13	Vacant
TB14	Vacant
TB15	Vacant
TB16	Vacant
TB17	Vacant
TB18	Vacant
TB19	Vacant
TB20	Vacant

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A


#### 3.8 A1SY28AEU Triac Output Module

Model Specifications	Triac Output Module		Appearance
	A1SY28AEU		
Number of output points	8 points (number of occupied I/O points : 16 points)		A1SY28AEU
Insulation method	Photocoupler		0
Rated load voltage	100 to 240 VAC 50/60 Hz ±3 Hz		1
Max. load voltage	264 VAC		2
Max. load current	0.6 A/point, 1.9 A/common		3
Min. load voltage/current	24 VAC 15 mA, 120 VAC 15 mA, 240 VAC 15 mA		4
Max. input current	30 A 10 ms or less, 15 A 100 ms or less		5
Leakage current at OFF circuit	1.5 mA (240 VAC 60 Hz)		6
Max. voltage drop at ON circuit	1.5 VAC or less (15mA to 1 A)		7
Response time OFF → ON	1 ms or less		8
ON → OFF	0.5 CYCLE + 1 ms or less		9
Surge absorber	Built-in CR absorber (0.01 μF + 47 Ω)		A
Fuse rating	None		B
Common terminal arrangement	4 points/common (common terminals: TB8, TB16)		C
Operating indicator	ON state is indicated (LEDs)		D
External connections	20-point terminal block connector (M3.5 × 7 screws)		E
Applicable wire size	0.75 to 1.25 mm <sup>2</sup> (AWG16 to AWG19)		F
Applicable crimp terminals	RAV1.25-3.5		
Accessories	None		
Insulation withstand voltage	2830VAC		
Noise immunity	1000VAC		
Internal current consumption (5 VDC)	270 mA (TYP, all points ON)		
Weight kg (lb)	0.24 (0.53)		

External Connections	
Terminal No.	Signal Name
TB1	Y00
TB2	Vacant
TB3	Y01
TB4	Vacant
TB5	Y02
TB6	Vacant
TB7	Y03
TB8	COM1
TB9	Y04
TB10	Vacant
TB11	Y05
TB12	Vacant
TB13	Y06
TB14	Vacant
TB15	Y07
TB16	COM2
TB17	Vacant
TB18	Vacant
TB19	Vacant
TB20	Vacant

Internal circuit

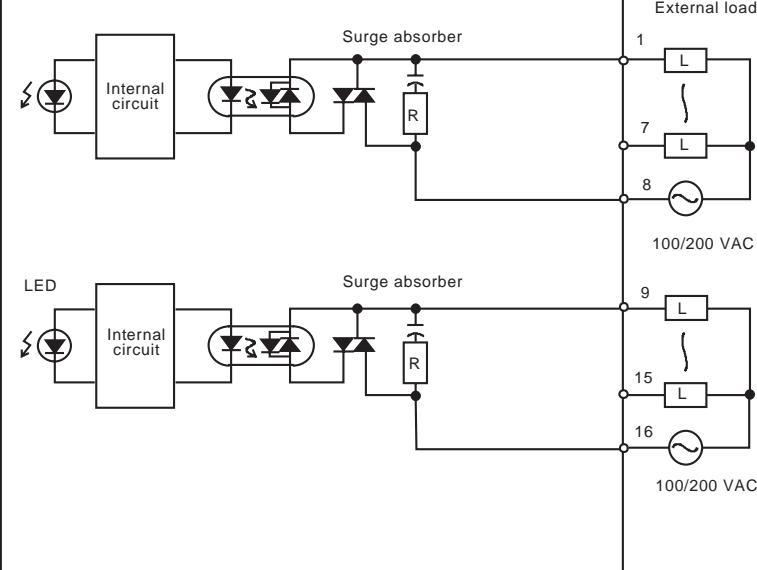

### 3. OUTPUT MODULE SPECIFICATIONS


MELSEC-A

#### 3.9 A1SY40 Transistor Output Module (Sink Type)

Model Specifications	Transistor Output Module (Sink Type)		Appearance
	A1SY40		
Number of output points	16 points		
Isolation method	Photocoupler		
Rated load voltage	12/24 VDC		
Operating voltage range	10.2 to 30 VDC (peak voltage 30 VDC)		
Max. load current	0.1 A/point, 0.8 A/common		
Max. allowed rush current	0.4 A 10 ms or less		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	1.0 VDC (TYP) 0.1 A, 2.5 VDC (MAX) 0.1 A		
Response time	OFF → ON 2 ms or less ON → OFF 2 ms or less (resistive load)		
Surge absorber	Zener diode		
Fuse rating	Fuse 1.6 A (1 piece/common), not replaceable *1		
Fuse capacity	50 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *2		
Common terminal arrangement	8 points/common (common terminals: TB10, TB20)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Accessories	None		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage 12/24 VDC (10.2 to 30 VDC) Current 8 mA (TYP 24 VDC/common)		
Internal current consumption (5 VDC)	270 mA (TYP, all points ON)		
Weight kg (lb)	0.19 (0.42)		

External Connections	
Terminal No.	Signal Name
TB1	Y00
TB2	Y01
TB3	Y02
TB4	Y03
TB5	Y04
TB6	Y05
TB7	Y06
TB8	Y07
TB9	12/24 VDC
TB10	COM1
TB11	Y08
TB12	Y09
TB13	Y0A
TB14	Y0B
TB15	Y0C
TB16	Y0D
TB17	Y0E
TB18	Y0F
TB19	12/24 VDC
TB20	COM2

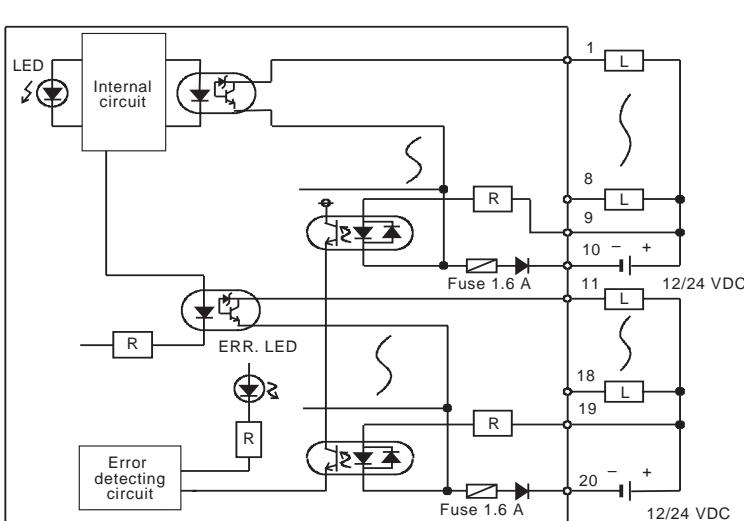

\*1 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 : The ERR. indicating LED will also light when the external power supply is shut OFF.



### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.10 A1SY41 Transistor Output Module (Sink Type)

Model		Transistor Output Module (Sink type)		Appearance
Specifications		A1SY41		
Number of output points	32 points			
Isolation method	Photocoupler			
Rated load voltage	12/24 VDC			
Operating voltage range	10.2 to 30 VDC (peak voltage 30 VDC)			
Max. load current	0.1 A/point, 2 A/common			
Max. allowed rush current	0.4 A 10 ms or less			
Leakage current at OFF circuit	0.1 mA or less			
Max. voltage drop at ON circuit	1.0 VDC (TYP) 0.1 A, 2.5 VDC (MAX) 0.1 A			
Response time	OFF → ON ON → OFF	2 ms or less 2 ms or less (resistive load)		
Surge absorber	Zener diode			
Fuse rating	Fuse 3.2 A (1 piece/common), not replaceable *3			
Fuse capacity	50 A			
Error display	LED goes ON when fuse blows: signal output to PC CPU *4			
Common terminal arrangement	32 points/common (common terminals: A1, A2)			
Operating indicator	ON state is indicated (LEDs)			
External connections	40-pin connector			
Applicable wire size	0.3 mm <sup>2</sup>			
Accessories	Connector (1 pce.) for external wiring (soldering type)			
Insulatoin withstand voltage	500 VAC			
Noise immunity	500 VAC			
External power supply	Voltage Current	12/24 VDC (10.2 to 30 VDC) 8 mA (TYP 24 VDC/common)		
Internal current consumption (5 VDC)	500 mA (TYP, all points ON)			
Weight kg (lb)	0.21 (0.46)			

#### External Connections

Internal circuit		Pin Arrangement	Pin No.	Signal Name (FH)	Pin No.	Signal Name (FH)	
			B20	Y00	A20	Y10	
			B19	Y01	A19	Y11	
			B18	Y02	A18	Y12	
			B17	Y03	A17	Y13	
			B16	Y04	A16	Y14	
			B15	Y05	A15	Y15	
			B14	Y06	A14	Y16	
			B13	Y07	A13	Y17	
			B12	Y08	A12	Y18	
			B11	Y09	A11	Y19	
			B10	Y0A	A10	Y1A	
			B9	Y0B	A9	Y1B	
			B8	Y0C	A8	Y1C	
			B7	Y0D	A7	Y1D	
			B6	Y0E	A6	Y1E	
			B5	Y0F	A5	Y1F	
			B4	Vacant	A4	Vacant	
			B3	Vacant	A3	Vacant	
			B2	12/24 VDC	A2	COM	
			B1	12/24 VDC	A1	COM	
			Front view				

\*1 : The arrangement of pins A and B shown above is the opposite of the arrangement of pins of the connector on the module.  
\*2 : A1SY41 is supplied with a soldering-type connector (Fujitsu).  
Model name : FCN-361J040-AU (connector)  
FCN-360C040-B (cover)  
\*3 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices. If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.  
\*4 : The ERR. indicating LED will also light when the external power supply is shut OFF.


### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.11 A1SY42 Transistor Output Module (Sink Type)

Model		Transistor Output Module (Sink Type)	Appearance
Specifications		A1SY42	
Number of output points	64 points		
Isolation method	Photocoupler		
Rated load voltage	12/24 VDC		
Operating voltage range	10.2 to 30 VDC (peak voltage 30 VDC)		
Max. load current	0.1 A/point, 1.6 A/common		
Max. allowed rush current	0.4 A 10 ms or less		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	1.0 VDC (TYP) 0.1 A, 2.5 VDC (MAX) 0.1 A		
Response time	OFF → ON ON → OFF	2 ms or less 2 ms or less (resistive load)	
Surge absorber	Zener diode		
Fuse rating	Fuse 3.2 A (1 piece/common), not replaceable *3		
Fuse capacity	50 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *4		
Common terminal arrangement	32 points/common (common terminals: 1A1, 1A2, 2A1, 2A2)		
Operating indicator	ON state is indicated (LEDs), 32-bit indication by switch		
External connections	40-pin connector		
Applicable wire size	0.3 mm <sup>2</sup>		
Accessories	Connectors (2 pces.) for external wiring (soldering type)		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage Current	12/24 VDC (10.2 to 30 VDC) 8 mA (TYP 24 VDC/common)	
Internal current consumption (5 VDC)	930 mA (TYP, all points ON)		
Weight kg (lb)	0.27 (0.59)		

#### External Connections

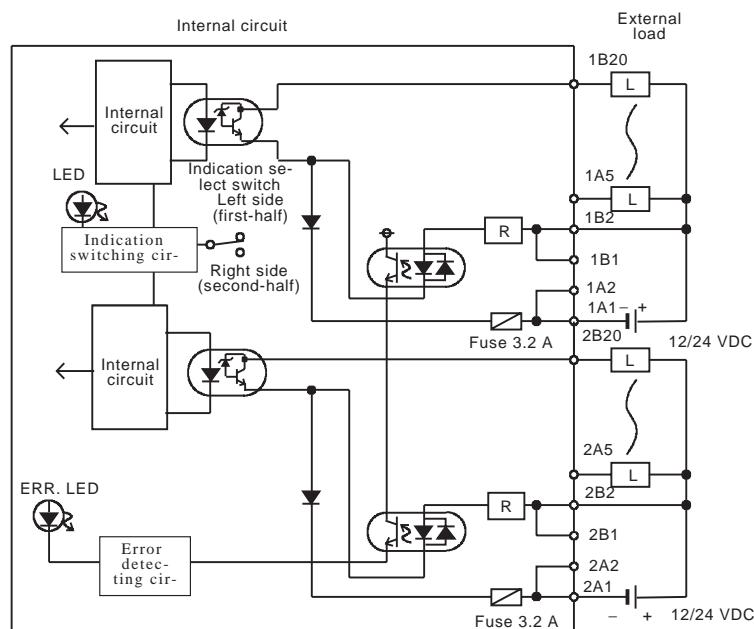

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

Pin Arrangement	Pin No.	Signal Name (FH)	Pin No.	Signal Name (FH)	Pin No.	Signal Name (LH)	Pin No.	Signal Name (LH)
 Front view	1B20	Y00	1A20	Y10	2B20	Y20	2A20	Y30
	1B19	Y01	1A19	Y11	2B19	Y21	2A19	Y31
	1B18	Y02	1A18	Y12	2B18	Y22	2A18	Y32
	1B17	Y03	1A17	Y13	2B17	Y23	2A17	Y33
	1B16	Y04	1A16	Y14	2B16	Y24	2A16	Y34
	1B15	Y05	1A15	Y15	2B15	Y25	2A15	Y35
	1B14	Y06	1A14	Y16	2B14	Y26	2A14	Y36
	1B13	Y07	1A13	Y17	2B13	Y27	2A13	Y37
	1B12	Y08	1A12	Y18	2B12	Y28	2A12	Y38
	1B11	Y09	1A11	Y19	2B11	Y29	2A11	Y39
	1B10	Y0A	1A10	Y1A	2B10	Y2A	2A10	Y3A
	1B9	Y0B	1A9	Y1B	2B9	Y2B	2A9	Y3B
	1B8	Y0C	1A8	Y1C	2B8	Y2C	2A8	Y3C
	1B7	Y0D	1A7	Y1D	2B7	Y2D	2A7	Y3D
	1B6	Y0E	1A6	Y1E	2B6	Y2E	2A6	Y3E
	1B5	Y0F	1A5	Y1F	2B5	Y2F	2A5	Y3F
	1B4	Vacant	1A4	Vacant	2B4	Vacant	2A4	Vacant
	1B3	Vacant	1A3	Vacant	2B3	Vacant	2A3	Vacant
	1B2	12/24 VDC	1A2	COM1	2B2	12/24 VDC	2A2	COM2
	1B1	12/24 VDC	1A1	COM1	2B1	12/24 VDC	2A1	COM2


\*1 : In the pin number column, the pins beginning with "1[ ]" are left connector pins and those beginning with "2[ ]" are right connector pins.  
 \*2 : When the switch is set to the left side position, the status of the first-half devices (Y00 to Y1F) is displayed by the LEDs.  
     When it is set to the right side, the status of the second-half devices (Y20 to Y3F) is displayed by the LEDs.  
 \*3 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.  
     If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.  
 \*4 : The ERR. indicating LED will also light when the external power supply is shut OFF.  
 \*5 : The arrangement of pins A and B shown above is the opposite of the arrangement of pins of the connector on the module.

### **3. OUTPUT MODULE SPECIFICATIONS**

MELSEC-A

### 3.12 A1SY50 Transistor Output Module (Sink Type)

Specifications	Model	Transistor Output Module (Sink Type)	
		A1SY50	Appearance
Number of output points	16 points		
Isolation method	Photocoupler		
Rated load voltage	12/24 VDC		
Operating voltage range	10.2 to 30 VDC (peak voltage 30 VDC)		
Max. load current	0.5 A/point, 2 A/common		
Max. allowed rush current	4 A 10 ms or less		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	0.9 VDC (TYP) 0.5 A, 1.5 VDC (MAX) 0.5 A		
Response time	OFF → ON	2 ms or less	
	ON → OFF	2 ms or less (resistive load)	
Surge absorber	Zener diode		
Fuse rating	Fuse 3.2 A (1 piece/common), not replaceable *1		
Fuse capacity	50 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *2		
Common terminal arrangement	8 points/common (common terminals: TB10, TB20)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5 R2-3.5 RAV1.25-3.5 RAV2-3.5		
Accessories	None		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage	12/24 VDC (10.2 to 30 VDC)	
	Current	60 mA (TYP 24 VDC/common)	
Internal current consumption (5 VDC)	120 mA (TYP, all points ON)		
Weight kg (lb)	0.2 (0.44)		

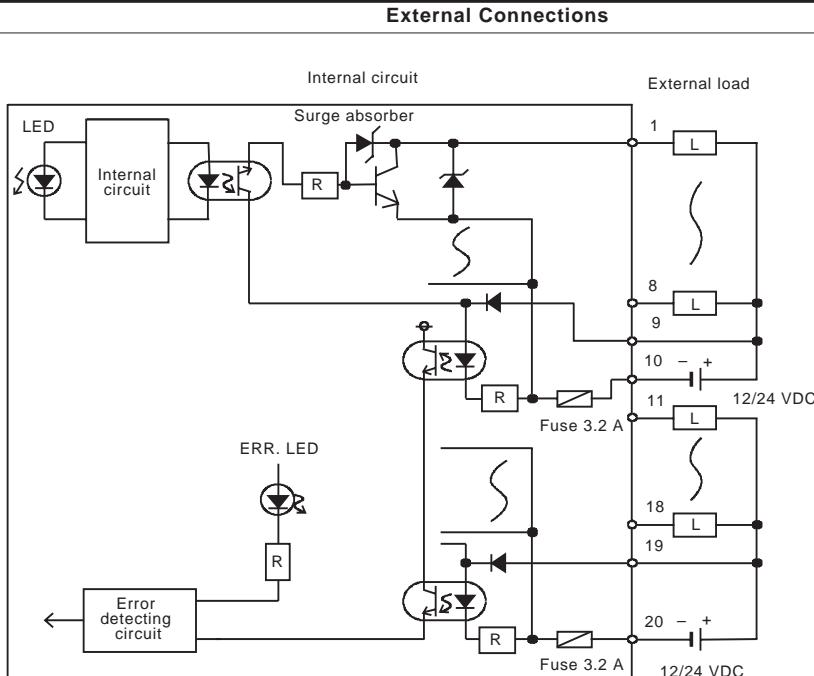

Terminal No.	Signal Name
TB1	Y00
TB2	Y01
TB3	Y02
TB4	Y03
TB5	Y04
TB6	Y05
TB7	Y06
TB8	Y07
TB9	12/24 VDC
TB10	COM1
TB11	Y08
TB12	Y09
TB13	Y0A
TB14	Y0B
TB15	Y0C
TB16	Y0D
TB17	Y0E
TB18	Y0F
TB19	12/24 VDC
TB20	COM2

\*1 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 : The ERR. indicating LED will also light when the external power supply is shut OFF.



### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.13 A1SY60 Transistor Output Module (Sink Type)

Model Specifications	Transistor Output Module (Sink Type)		Appearance
	A1SY60		
Number of output points	16 points		
Isolation method	Photocoupler		
Rated load voltage	24 VDC		
Operating voltage range	21.6 to 26.4 VDC (peak voltage 26.4 VDC)		
Max. load current	2 A/point, 4 A/common (Ta=25°C), 1.8 A/point, 3.6 A/common (Ta=45°C), 1.6 A/point, 3.2 A/common (Ta=55°C)		
Max. allowed rush current	8 A 10 ms or less		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	0.9 VDC (TYP) 2 A, 1.5 VDC (MAX) 0.5 A		
Response time	OFF → ON	2 ms or less	
	ON → OFF	2 ms or less (resistive load)	
Surge absorber	Zener diode		
Fuse rating	Fuse 5 A (1 piece/common), not replaceable *1		
Fuse capacity	50 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *2		
Common terminal arrangement	8 points/common (common terminals: TB10, TB20)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5 R2-3.5 RAV1.25-3.5 RAV2-3.5		
Accessories	None		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage	24 VDC (21.6 to 26.4 VDC)	
	Current	15 mA (TYP 24 VDC/common)	
Internal current consumption (5 VDC)	120 mA (TYP, all points ON)		
Weight kg (lb)	0.25 (0.55)		

#### External Connections

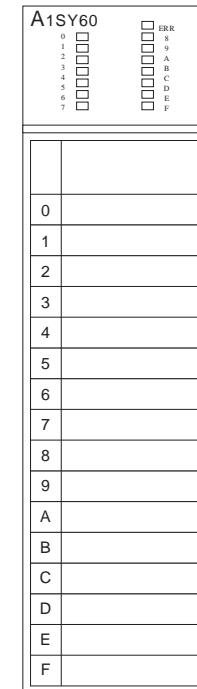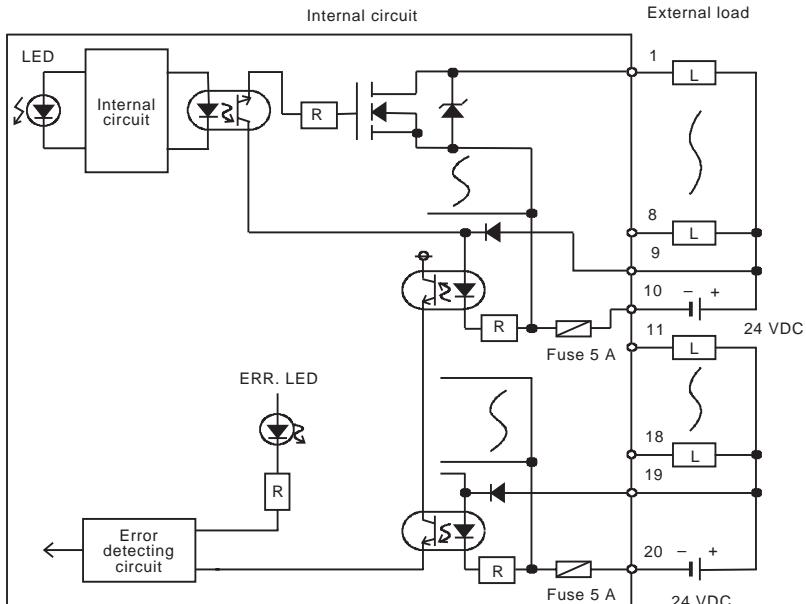

Terminal No.	Signal Name
TB1	Y00
TB2	Y01
TB3	Y02
TB4	Y03
TB5	Y04
TB6	Y05
TB7	Y06
TB8	Y07
TB9	24 VDC
TB10	COM1
TB11	Y08
TB12	Y09
TB13	Y0A
TB14	Y0B
TB15	Y0C
TB16	Y0D
TB17	Y0E
TB18	Y0F
TB19	24 VDC
TB20	COM2

\*1 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 : The ERR. indicating LED will also light when the external power supply is shut OFF.

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.14 A1SY60E Transistor Output Module (Source Type)

Model Specifications	Transistor Output Module (Source Type)		Appearance
	A1SY60E		
Number of output points	16 points		
Isolation method	Photocoupler		
Rated load voltage	5/12/24 VDC		
Operating voltage range	4.5 to 26.4 VDC (peak voltage 26.4 VDC)		
Max. load current	2 A/point (condition: $\tau = L/R \leq 2.5$ ms), 4 A/common		
Max. allowed rush current	8 A 10 ms or less		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	0.2 VDC (MAX) 1 A, 0.4 VDC (MAX) 2 A		
Response time	OFF → ON	3 ms or less	
	ON → OFF	10 ms or less (resistive load)	
Surge absorber	Zener diode		
Fuse rating	Fuse 7 A (1 piece/common), not replaceable *1		
Fuse capacity	300 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *2		
Common terminal arrangement	8 points/common (common terminals: TB9, TB19)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5 R2-3.5 RAV1.25-3.5 RAV2-3.5		
Accessories	None		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage	12/24 VDC (10.2 to 26.4 VDC)*3	
	Current	10 mA (TYP 24 VDC/common)	
Internal current consumption (5 VDC)	200 mA (TYP, all points ON)		
Weight kg (lb)	0.2 (0.44)		

External Connections	
Internal circuit	When 12/24 VDC load voltage is connected
	When 5 VDC load voltage is connected
Terminal No.	Signal Name
TB1	Y00
TB2	Y01
TB3	Y02
TB4	Y03
TB5	Y04
TB6	Y05
TB7	Y06
TB8	Y07
TB9	COM1
TB10	0V
TB11	Y08
TB12	Y09
TB13	Y0A
TB14	Y0B
TB15	Y0C
TB16	Y0D
TB17	Y0E
TB18	Y0F
TB19	COM2
TB20	0V

\*1 The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices. If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 The ERR. indicating LED will also light when the external power supply is shut OFF.

\*3 When 5 VDC operating load voltage is used, another 12/24 VDC power supply is required for external power supply.

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A


#### 3.15 A1SY68A Transistor Output Module (Sink/Source Common Type (All Points Independent))

Model Specifications	Transistor Output Module		Appearance
	A1SY68A		
Number of output points	8 points (number of occupied I/O points : 16 points)		A1SY68A
Isolation method	Photocoupler		0 1 2 3 4 5 6 7 s 9 A B C D E F
Rated load voltage	5/12/24/48 VDC		0
Operating voltage range	4.5 to 52.8 VDC		1
Max. load current	2 A/point		2
Max. allowed rush current	8 A 10 ms or less		3
Leakage current at OFF circuit	0.1 mA or less		4
Max. voltage drop at ON circuit	0.4 VDC (MAX) 2 A		5
Response time	OFF → ON	3 ms or less	6
	ON → OFF	10 ms or less (resistive load)	7
Surge absorber	Zener diode		8
Common terminal arrangement	None (all points independent)		9
Operating indicator	ON state is indicated (LEDs)		A
External connections	20-point terminal block connector (M3.5 x 7 screws)		B
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		C
Applicable solderless terminals	R1.25-3.5 R2-3.5 RAV1.25-3.5 RAV2-3.5		D
Insulation withstand voltage	500 VAC		E
Noise immunity	500 VAC		F
External power supply	None		
Internal current consumption (5 VDC)	110 mA		
Weight kg (lb)	0.2 (0.44)		

External Connections	
Terminal No.	Signal Name
TB1	Y00
TB2	
TB3	Y01
TB4	
TB5	Y02
TB6	
TB7	Y03
TB8	
TB9	Y04
TB10	
TB11	Y05
TB12	
TB13	Y06
TB14	
TB15	Y07
TB16	
TB17	Vacant
TB18	Vacant
TB19	Vacant
TB20	Vacant

Internal circuit

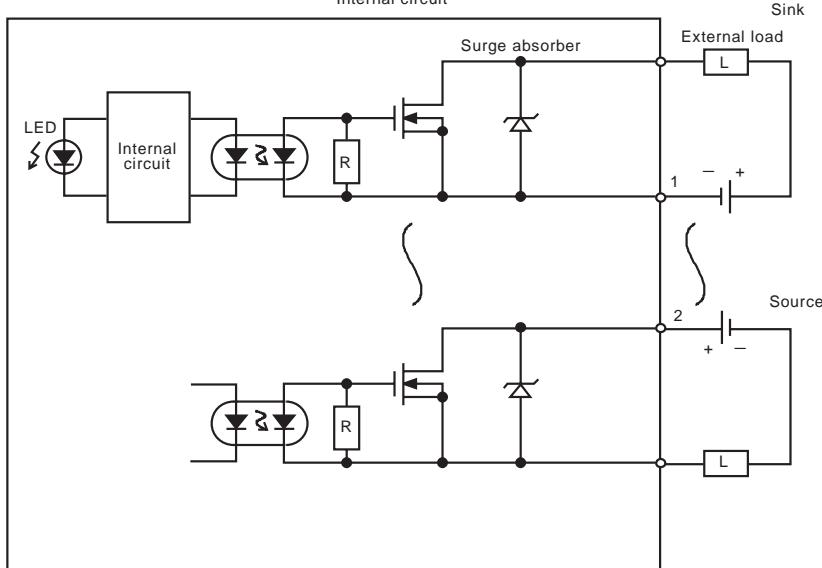

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.16 A1SY71 Transistor Output Module (Sink Type)

Specifications	Model		Transistor Output Module (for TTL, CMOS : Sink Type)		Appearance
	A1SY71				
Number of output points	32 points				
Isolation method	Photocoupler				
Rated load voltage	5/12 VDC				
Operating voltage range	4.5 to 15 VDC				
Max. load current	16 mA/point, 256 mA/common				
Max. allowed rush current	40 mA 10 ms or less				
Leakage current at OFF circuit	$V_{OH} : 3.5 \text{ VDC}$ ( $V_{CC} = 5 \text{ VDC}$ , $I_{OH} = 0.4 \text{ mA}$ )				
Max. voltage drop at ON circuit	$V_{OL} : 0.3 \text{ VDC}$				
Response time	OFF → ON	1 ms or less			
	ON → OFF	1 ms or less (resistive load)			
Surge absorber	None				
Fuse rating	Fuse 1.6 A (1 piece/common), not replaceable *2				
Fuse capacity	50 A				
Error display	LED goes ON when fuse blows: signal output to PC CPU *3				
Common terminal arrangement	32 points/common (common terminals: A1, A2)				
Operating indicator	ON state is indicated (LEDs)				
External connections	40-pin connector				
Applicable wire size	0.3 mm <sup>2</sup>				
Accessories	Connector (1 pcs.) for external wiring (soldering type)				
Insulation withstand voltage	500 VAC				
Noise immunity	500 VAC				
External power supply	Voltage	5/12 VDC (4.5 to 15 VDC)			
	Current	150 mA (TYP 12 VDC/common)			
Internal current consumption (5 VDC)	400 mA (TYP, all points ON)				
Weight kg (lb)	0.19 (0.42)				

External Connections					
Internal circuit		Pin Arrangement			
		B20	A20	Y00	Y10
B20	A20	Y00	Y10		
B19	A19	Y01	Y11		
B18	A18	Y02	Y12		
B17	A17	Y03	Y13		
B16	A16	Y04	Y14		
B15	A15	Y05	Y15		
B14	A14	Y06	Y16		
B13	A13	Y07	Y17		
B12	A12	Y08	Y18		
B11	A11	Y09	Y19		
B10	A10	Y0A	Y1A		
B9	A9	Y0B	Y1B		
B8	A8	Y0C	Y1C		
B7	A7	Y0D	Y1D		
B6	A6	Y0E	Y1E		
B5	A5	Y0F	Y1F		
B4	A4	Vacant	Vacant		
B3	A3	Vacant	Vacant		
B2	A2	5/12 VDC	A2	COM	
B1	A1	5/12 VDC	A1	COM	

\*1 : The arrangement of pins A and B shown above is the opposite of the arrangement of pins of the connector on the module.

\*2 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*3 : The ERR. indicating LED will also light when the external power supply is shut OFF.

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.17 A1SY80 Transistor Output Module (Source Type)

Model Specifications	Transistor Output Module (Source Type)		Appearance
	A1SY80		
Number of output points	16 points		
Isolation method	Photocoupler		
Rated load voltage	12/24 VDC		
Operating voltage range	10.2 to 30 VDC (peak voltage 30 VDC)		
Max. load current	0.8 A/point, 3.2 A/common		
Max. allowed rush current	8 A 10 ms or less		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	1.5 VDC (MAX) 0.8 A		
Response time	OFF → ON	2 ms or less	
	ON → OFF	2 ms or less (resistive load)	
Surge absorber	Zener diode		
Fuse rating	Fuse 5 A (1 piece/common), not replaceable *1		
Fuse capacity	50 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *2		
Common terminal arrangement	8 points/common (common terminals: TB9, TB19)		
Operating indicator	ON state is indicated (LEDs)		
External connections	20-point terminal block connector (M3.5 x 7 screws)		
Applicable wire size	0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminals	R1.25-3.5 R2-3.5 RAV1.25-3.5 RAV2-3.5		
Accessories	None		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage	12/24 VDC (10.2 to 30 VDC)	
	Current	20 mA (TYP 24 VDC/common)	
Internal current consumption (5 VDC)	120 mA (TYP, all points ON)		
Weight kg (lb)	0.2 (0.44)		

#### External Connections

Terminal No.	Signal Name
TB1	Y00
TB2	Y01
TB3	Y02
TB4	Y03
TB5	Y04
TB6	Y05
TB7	Y06
TB8	Y07
TB9	COM1
TB10	0V
TB11	Y08
TB12	Y09
TB13	Y0A
TB14	Y0B
TB15	Y0C
TB16	Y0D
TB17	Y0E
TB18	Y0F
TB19	COM2
TB20	0V

\*1 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 : The ERR. indicating LED will also light when the external power supply is shut OFF.

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.18 A1SY81 Transistor Output Module (Source Type)

Model Specifications	Transistor Output Module (Source Type)		Appearance
	A1SY81		
Number of output points	32 points		
Isolation method	Photocoupler		
Rated load voltage	12/24 VDC		
Operating voltage range	10.2 to 30 VDC (peak voltage 30 VDC)		
Max. load current	0.1 A/point, 2 A/common		
Max. allowed rush current	0.4 A 10 ms or less		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	1.0 VDC (TYP) 0.1 A, 2.5 VDC (MAX) 0.1 A		
Response time	OFF → ON ON → OFF	2 ms or less 2 ms or less (resistive load)	
Surge absorber	Zener diode		
Fuse rating	Fuse 3.2 A (1 piece/common), not replaceable *1		
Fuse breaking capacity	50 A		
Error display	LED goes ON when fuse blows: signal output to PC CPU *2		
Common terminal arrangement	32 points/common (common terminals: 17, 18, 36)		
Operating indicator	ON state is indicated (LEDs)		
External connections	37-pin D sub-connector		
Applicable wire size	0.3 mm <sup>2</sup>		
Accessories	Connector (1 pce.) for external wiring (soldering type)		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage Current	12/24 VDC (10.2 to 30 VDC) 8 mA (TYP 24 VDC/common)	
Internal current consumption (5 VDC)	500 mA (TYP, all points ON)		
Weight kg (lb)	0.23 (0.51)		

#### External Connections

Pin Arrangement	Pin No.	Signal Name	Pin No.	Signal Name
20	Y00	9	Y10	
21	Y01	28	Y11	
22	Y02	10	Y12	
23	Y03	29	Y13	
24	Y04	11	Y14	
25	Y05	30	Y15	
26	Y06	12	Y16	
27	Y07	31	Y17	
28	Y08	13	Y18	
29	Y09	32	Y19	
30	Y0A	14	Y1A	
31	Y0B	33	Y1B	
32	Y0C	15	Y1C	
33	Y0D	34	Y1D	
34	Y0E	16	Y1E	
35	Y0F	35	Y1F	
36	COM	37	0V	
37	COM	19	0V	
Front view				

Internal circuit

External connections

The diagram shows the pin assignments for the 37-pin D sub-connector. The pins are numbered 1 through 37. The first 16 pins (1-16) are for outputs Y00-Y15. The next 16 pins (17-32) are for outputs Y16-Y31. Pins 33-37 are for COM (common) and 0V. Pin 20 is connected to the external load, pin 35 to the common terminal, and pins 19 and 37 to 0V. A fuse of 3.2 A is located between pins 35 and 19.

\*1 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 : The ERR. indicating LED will also light when the external power supply is shut OFF.

### 3. OUTPUT MODULE SPECIFICATIONS

MELSEC-A

#### 3.19 A1SY81EP Circuit Protection Provided Transistor Output Module (Source Type)

Model Specifications	Transistor Output Module (Source Type)		Appearance																																																																																																	
	A1SY81EP																																																																																																			
Number of output points	32 points																																																																																																			
Isolation method	Photocoupler																																																																																																			
Rated load voltage	12/24 VDC																																																																																																			
Operating load voltage range	10.2 to 26.4 VDC																																																																																																			
Max. load current	0.1 A/point, 2 A/common ( $T_a = 25^\circ C$ ), 0.05 A/point, 1.6 A/common ( $T_a = 55^\circ C$ )																																																																																																			
Max. inrush current	No limit (short protect)																																																																																																			
Leakage current at OFF circuit	0.1 mA or lower																																																																																																			
Max. voltage drop at ON circuit	3.5 VDC (0.1 A Max.), 2.5 VDC (0.1 A Min.)																																																																																																			
Response time	OFF → ON ON → OFF	0.5 ms or less 1.5 ms or less (resistive load)																																																																																																		
Surge absorber	Clamping diode																																																																																																			
Protect	Provided (thermal and short-circuit protect) Thermal protect is detected in 8 points module (Y0 to 7, 8, to F, 10 to 17, 18 to 1F). When thermal protect occurs at an 8 points of 1 common, output of all points for corresponded common terminal is turned OFF.																																																																																																			
Protect detection indication	None (signal not output to a PC CPU.)																																																																																																			
Protect reset	Automatic reset (reset by canceling thermal protect)																																																																																																			
Common method	32 points/common (common terminals: 17, 18, 36)																																																																																																			
Operating indicator	ON state is indicated (LEDs)																																																																																																			
External connections	37-pin D sub-connector																																																																																																			
Applicable wire size	0.3 mm <sup>2</sup>																																																																																																			
Accessories	Connector (1 pcs.) for external wiring (soldering type)																																																																																																			
External power supply	Voltage Current	12/24 VDC (10.2 to 26.4 VDC) 80 mA (TYP. 24 VDC/common)																																																																																																		
Internal current consumption (5 VDC)	500 mA (TYP. all points ON)																																																																																																			
Weight kg (lb)	0.25 (0.55)																																																																																																			
<b>External Connections</b>																																																																																																				
Internal circuit		<table border="1"> <thead> <tr> <th>Pin Arrangement</th> <th>Pin No.</th> <th>Signal Name</th> <th>Pin No.</th> <th>Signal Name</th> </tr> </thead> <tbody> <tr><td>20</td><td>1</td><td>Y00</td><td>9</td><td>Y10</td></tr> <tr><td>21</td><td>2</td><td>Y01</td><td>28</td><td>Y11</td></tr> <tr><td>22</td><td>3</td><td>Y02</td><td>10</td><td>Y12</td></tr> <tr><td>23</td><td>4</td><td>Y03</td><td>29</td><td>Y13</td></tr> <tr><td>24</td><td>5</td><td>Y04</td><td>11</td><td>Y14</td></tr> <tr><td>25</td><td>6</td><td>Y05</td><td>30</td><td>Y15</td></tr> <tr><td>26</td><td>7</td><td>Y06</td><td>12</td><td>Y16</td></tr> <tr><td>27</td><td>8</td><td>Y07</td><td>31</td><td>Y17</td></tr> <tr><td>28</td><td>9</td><td>Y08</td><td>13</td><td>Y18</td></tr> <tr><td>29</td><td>10</td><td>Y09</td><td>32</td><td>Y19</td></tr> <tr><td>30</td><td>11</td><td>Y0A</td><td>14</td><td>Y1A</td></tr> <tr><td>31</td><td>12</td><td>Y0B</td><td>33</td><td>Y1B</td></tr> <tr><td>32</td><td>13</td><td>Y0C</td><td>15</td><td>Y1C</td></tr> <tr><td>33</td><td>14</td><td>Y0D</td><td>34</td><td>Y1D</td></tr> <tr><td>34</td><td>15</td><td>Y0E</td><td>16</td><td>Y1E</td></tr> <tr><td>35</td><td>16</td><td>Y0F</td><td>35</td><td>Y1F</td></tr> <tr><td>36</td><td>17</td><td>COM</td><td>37</td><td>0V</td></tr> <tr><td>37</td><td>18</td><td>COM</td><td>19</td><td>0V</td></tr> </tbody> </table>	Pin Arrangement	Pin No.	Signal Name	Pin No.	Signal Name	20	1	Y00	9	Y10	21	2	Y01	28	Y11	22	3	Y02	10	Y12	23	4	Y03	29	Y13	24	5	Y04	11	Y14	25	6	Y05	30	Y15	26	7	Y06	12	Y16	27	8	Y07	31	Y17	28	9	Y08	13	Y18	29	10	Y09	32	Y19	30	11	Y0A	14	Y1A	31	12	Y0B	33	Y1B	32	13	Y0C	15	Y1C	33	14	Y0D	34	Y1D	34	15	Y0E	16	Y1E	35	16	Y0F	35	Y1F	36	17	COM	37	0V	37	18	COM	19	0V	Front view		
Pin Arrangement	Pin No.	Signal Name	Pin No.	Signal Name																																																																																																
20	1	Y00	9	Y10																																																																																																
21	2	Y01	28	Y11																																																																																																
22	3	Y02	10	Y12																																																																																																
23	4	Y03	29	Y13																																																																																																
24	5	Y04	11	Y14																																																																																																
25	6	Y05	30	Y15																																																																																																
26	7	Y06	12	Y16																																																																																																
27	8	Y07	31	Y17																																																																																																
28	9	Y08	13	Y18																																																																																																
29	10	Y09	32	Y19																																																																																																
30	11	Y0A	14	Y1A																																																																																																
31	12	Y0B	33	Y1B																																																																																																
32	13	Y0C	15	Y1C																																																																																																
33	14	Y0D	34	Y1D																																																																																																
34	15	Y0E	16	Y1E																																																																																																
35	16	Y0F	35	Y1F																																																																																																
36	17	COM	37	0V																																																																																																
37	18	COM	19	0V																																																																																																
<small>* Make sure that output short-circuits do not occur at more than three outputs simultaneously. If output short-circuits occur in three or outputs at the same time, the output element may be deteriorated or corrupted.</small>																																																																																																				

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS


MELSEC-A

### 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

#### 4.1 Input/Output Composite Module Specifications

##### 4.1.1 A1SH42 input/output module

Model		Input/Output Composite Module		Appearance
Specifications		Input Specifications		
Number of input points		32 points		
Isolation method		Photocoupler		
Rated input voltage		12 VDC		
Rated input current		Approx. 2 mA		
Operating voltage range		10.2 to 26.4 VDC (ripple: less than 5%)		
Max. simultaneous input points		60% (20 points/common) simultaneously ON (at 24 VDC)		
ON voltage/ON current		8 VDC or higher/2 mA or higher		
OFF voltage/OFF current		4 VDC or lower/0.6 mA or lower		
Input resistance		Approx. 5 kΩ		
Response time	OFF → ON	10 ms or less (24 VDC)		
	ON → OFF	10 ms or less (24 VDC)		
Common method		32 points/common (common terminals: 1B1, 1B2)		
Insulation withstand voltage		500 VAC		
Noise immunity		500 VAC		
Output Specifications				
Number of output points		32 points		
Isolation method		Photocoupler		
Rated input voltage		12/24 VDC		
Operating voltage range		10.2 to 30 VDC (peak voltage 30 VDC)		
Max. load current		0.1 A/point, 1.6 A/common		
Max. allowed rush current		0.4 A 10 ms or less		
Leakage current at OFF circuit		0.1 mA or less		
Max. voltage drop at ON circuit		1.0 VDC (TYP) 0.1 A, 2.5 VDC (MAX) 0.1 A		
Response time	OFF → ON	2 ms or less		
	ON → OFF	2 ms or less (resistive load)		
Surge absorber		Zener diode		
Fuse rating		Fuse 3.2 A (1 piece/common), not replaceable *3		
Fuse capacity		50 A		
Error display		LED goes ON when fuse blows: signal output to PC CPU *4		
Common method		32 points/common (common terminals: 2A1, 2A2)		
Insulation withstand voltage		500 VAC		
Noise immunity		500 VAC		
External power supply	Voltage	12/24 VDC (10.2 to 30 VDC)		
	Current	8 mA (TYP 24 VDC/common)		
Common Specifications				
Number of I/O points		32 (I/O allocation is set as a 32-point output module)		
Operating indicator		ON state is indicated (LEDs), 32-bit indication by switch		
External connections		40-pin connector		
Applicable wire size		0.3 mm <sup>2</sup>		
Accessories		Connector (2 cps.) for external wiring (soldering type)		
Internal current consumption (5 VDC)		500 mA (TYP, all points ON)		
Weight kg (lb)		0.27 (0.59)		

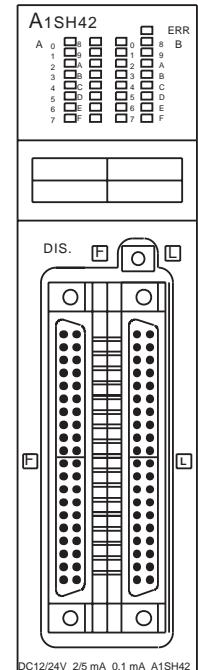

#### POINT

If using an A1SH42, observe the following points.


- (1) Set the I/O control mode of the PC CPU to the direct mode.
- (2) If the I/O control mode of the PC CPU is set to the refresh mode, install input modules or special function modules at the both sides of the A1SH42.

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A

### External Connections

Pin Arrangement	Pin No.	Signal Name (FH)	Pin No.	Signal Name (FH)	Pin No.	Signal Name (LH)	Pin No.	Signal Name (LH)
B20	1B20	X00	1A20	X10	2B20	Y00	2A20	Y10
B19	1B19	X01	1A19	X11	2B19	Y01	2A19	Y11
B18	1B18	X02	1A18	X12	2B18	Y02	2A18	Y12
B17	1B17	X03	1A17	X13	2B17	Y03	2A17	Y13
B16	1B16	X04	1A16	X14	2B16	Y04	2A16	Y14
B15	1B15	X05	1A15	X15	2B15	Y05	2A15	Y15
B14	1B14	X06	1A14	X16	2B14	Y06	2A14	Y16
B13	1B13	X07	1A13	X17	2B13	Y07	2A13	Y17
B12	1B12	X08	1A12	X18	2B12	Y08	2A12	Y18
B11	1B11	X09	1A11	X19	2B11	Y09	2A11	Y19
B10	1B10	X0A	1A10	X1A	2B10	Y0A	2A10	Y1A
B9	1B9	X0B	1A9	X1B	2B9	Y0B	2A9	Y1B
B8	1B8	X0C	1A8	X1C	2B8	Y0C	2A8	Y1C
B7	1B7	X0D	1A7	X1D	2B7	Y0D	2A7	Y1D
B6	1B6	X0E	1A6	X1E	2B6	Y0E	2A6	Y1E
B5	1B5	X0F	1A5	X1F	2B5	Y0F	2A5	Y1F
B4	1B4	Vacant	1A4	Vacant	2B4	Vacant	2A4	Vacant
B3	1B3	Vacant	1A3	Vacant	2B3	Vacant	2A3	Vacant
B2	1B2	12/24 VDC	1A2	Vacant	2B2	12/24 VDC	2A2	COM2
B1	1B1	12/24 VDC	1A1	Vacant	2B1	12/24 VDC	2A1	COM2

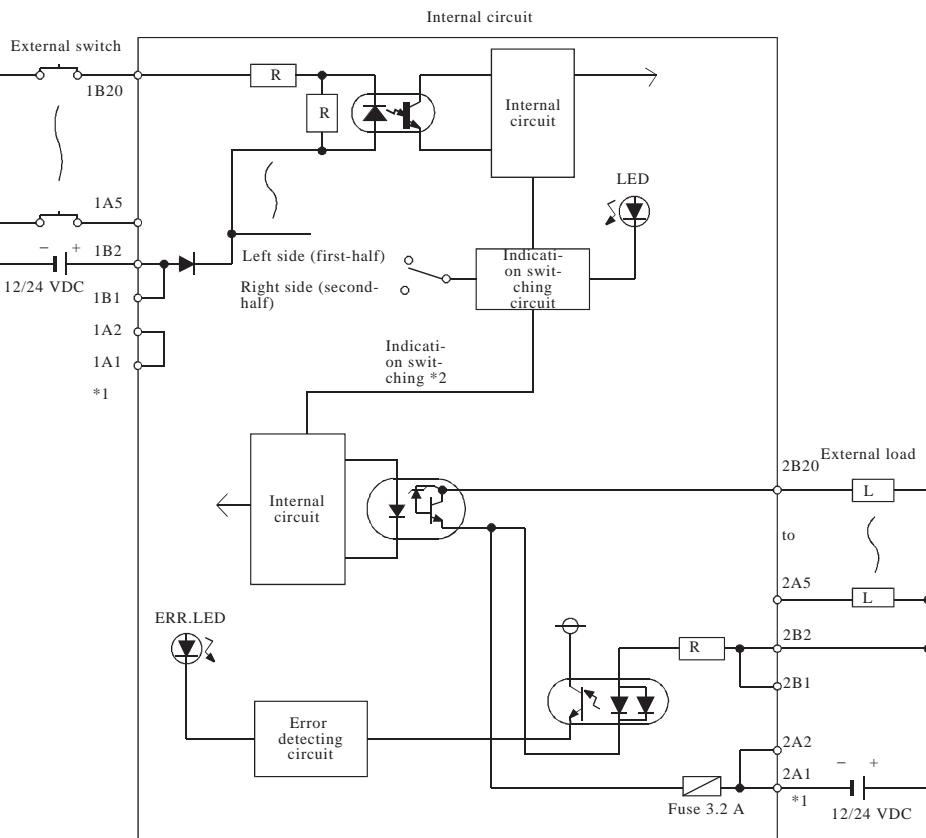

\*1 : In the pin number column, the pins beginning with "1[0-9]" are left connector pins and those beginning with "2[0-9]" are right connector pins.

\*2 : When the switch is set to the left side position, the status of the first-half devices (X00 to X1F) is displayed by the LEDs.

When it is set to the right side, the status of the second-half devices (Y00 to Y1F) is displayed by the LEDs.

\*3 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*4 : The ERR. indicating LED will also light when the external power supply is shut OFF.


\*5 : The A and B pin number rows shown here are transposed with respect to the diagram of the A and B rows which is printed on the module. Remember that the A row pin numbers correspond to the B row of the module.

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A

### 4.1.2 A1SX48Y18 I/O module (24 VDC input (sink type), relay contact output)


Model		Input/Output Composite Module		
Specifications		Input Specifications	Appearance	
Number of input points		8 points		
Isolation method		Photocoupler		
Rated input voltage		24 VDC		
Rated input current		Approx. 7 mA		
Operating voltage range		19.2 to 26.4 VDC (ripple: less than 5%)		
Max. simultaneous input points		100% simultaneously ON (at 26.4 VDC)		
ON voltage/ON current		14 VDC or higher/3.5 mA or higher		
OFF voltage/OFF current		6.5 VDC or lower/1.7 mA or lower		
Input resistance		Approx. 3.3 kΩ		
Response time	OFF → ON	10 ms or less (24 VDC)		
	ON → OFF	10 ms or less (24 VDC)		
Input method		Sink input (method by which the input current flows out)		
Common method		8 points/common (common terminals: TB9)		
Insulation withstand voltage		1500 VAC		
Noise immunity		1000 VAC		
Output Specifications				
Number of output points		8 points		
Isolation method		Photocoupler		
Rated switching voltage and current		24 VDC 2 A (resistive load) 240 VAC 2A (COSφ=1)/point, 8 A/common		
Minimum switching load		5 VDC 1mA		
Maximum switching voltage		264 VAC 125 VDC		
Response time	OFF → ON	10 ms or less		
	ON → OFF	12 ms or less (resistive load)		
Service life	Mechanical	20,000,000 times of switching or over		
		At rated switching voltage and current loads 100,000 times of switching or over		
	Electrical	At 200 VAC 1.5 A, 240 VAC 1 A (COSφ=0.7) 100,000 times of switching or over		
		At 200 VAC 1 A, 240 VAC 0.5 A (COSφ=0.35) 100,000 times of switching or over		
		At 24 VDC 1 A, 100 VDC 0.1 A (L/R = 7 ms) 100,000 times of switching or over		
Maximum switching frequency		3600 times/hour		
Surge absorber		Not provided		
Fuse		None		
External power supply (relay coil drive)	Voltage	24 VDC ±10%, ripple voltage: 4 V <sub>P-P</sub> or less		
	Current	45 mA (TYP. 24 VDC all points ON)		
Common method		8 points/common (common terminal: TB18)		
Insulation withstand voltage		500 VAC		
Noise immunity		500 VAC		
Common Specifications				
Operation indicator		Provided (The LED lights when the input/output is ON.)		
External wiring connection method		20-point terminal block connector (M3.5 x 7 screw)		
Applicable cable size		0.75 to 1.25 mm <sup>2</sup>		
Applicable solderless terminal		R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Accessories		None		
Internal current consumption (5 VDC)		85 mA (TYP. all points ON)		
Weight kg (lb)		0.225 (0.495)		
Number of I/O points		16 points (Make I/O allocation as a 16-point output module.)		

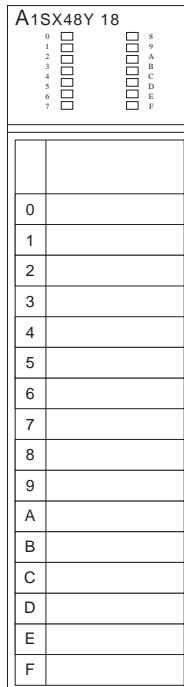

**POINT**

If using an A1SX48Y18, observe the following points.

- (1) Set the I/O control mode of the PC CPU to the direct mode.
- (2) If the I/O control mode of the PC CPU is set to the refresh mode, install input modules or special function modules at the both sides of the A1SX48Y18.

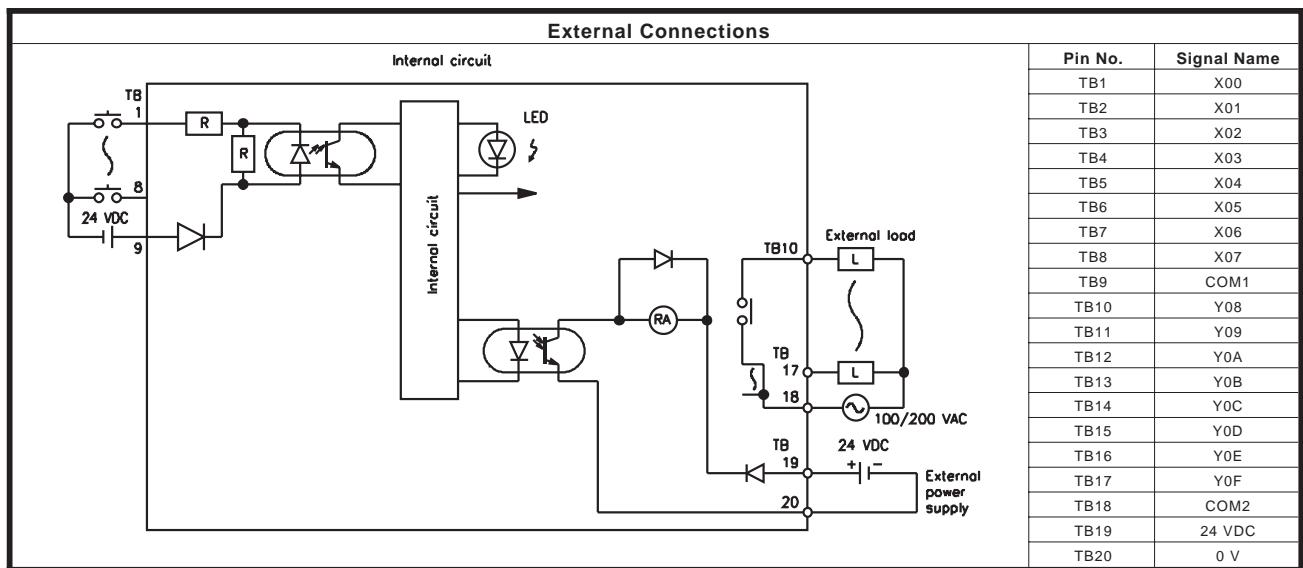


## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A

### 4.1.3 A1SX48Y58 I/O module (24 VDC input (sink type), 12/24 VDC transistor output)

Model		Input/Output Composite Module		Appearance
Specifications		Input Specifications		
Number of input points	8 points			
Isolation method	Photocoupler			
Rated input voltage	24 VDC			
Rated input current	Approx. 7 mA			
Operating voltage range	19.2 to 26.4 VDC (ripple: less than 5%)			
Max. simultaneous input points	100% simultaneously ON (at 26.4 VDC)			
ON voltage/ON current	14 VDC or higher/3.5 mA or higher			
OFF voltage/OFF current	6.5 VDC or lower/1.7 mA or lower			
Input resistance	Approx. 3.3 kΩ			
Response time	OFF → ON ON → OFF	10 ms or less (24 VDC) 10 ms or less (24 VDC)		
Input method	Sink input			
Common method	8 points/common (common terminals: TB9)			
Insulation withstand voltage	500 VAC			
Noise immunity	500 VAC			
		Output Specifications		
Number of output points	8 points			
Isolation method	Photocoupler			
Rated load voltage	12/24 VDC			
Operating voltage range	10.2 to 30 VDC (peak voltage 30 VDC)			
Maximum load current	0.5 A/point, 2 A/common			
Maximum inrush current	4 A 10 ms or less			
Leakage current at OFF circuit	0.1 mA or less			
Maximum voltage drop at ON circuit	0.9 VDC (TYP.) 0.5 A 1.5 VDC (MAX.) 0.5 A			
Response time	OFF → ON ON → OFF	2 ms or less 2 ms or less (resistive load)		
Surge absorber	Zener diode			
Fuse rating	Fuse 3.2 A (1 per common) Not replaceable *1			
Fuse breaking capacity	5.0 A			
Error display	LED goes ON when fuse blows: signal output to PC CPU *2			
External power supply (relay coil drive)	Voltage Current	12/24 VDC (10.2 to 30 VDC) 60 mA (TYP. 24 VDC per common)		
Common method	8 points/common (common terminal: TB19)			
Insulation withstand voltage	500 VAC			
Noise immunity	500 VAC			
		Common Specifications		
Operation indicator	Provided (The LED lights when the input/output is ON.)			
External wiring connection method	20-point terminal block connector (M3.5 x 7 screw)			
Applicable cable size	0.75 to 1.25 mm <sup>2</sup>			
Applicable solderless terminal	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5			
Accessories	None			
Internal current consumption (5 VDC)	60 mA (TYP. all points ON)			
Weight kg (lb)	0.2 (0.44)			
Number of I/O points	16 points (Make I/O allocation as a 16-point output module.)			




0	
1	
2	
3	
4	
5	
6	
7	
8	
9	
A	
B	
C	
D	
E	
F	

**POINT**

If using an A1SX48Y58, observe the following points.

- (1) Set the I/O control mode of the PC CPU to the direct mode.
- (2) If the I/O control mode of the PC CPU is set to the refresh mode, install input modules or special function modules at the both sides of the A1SX48Y58.

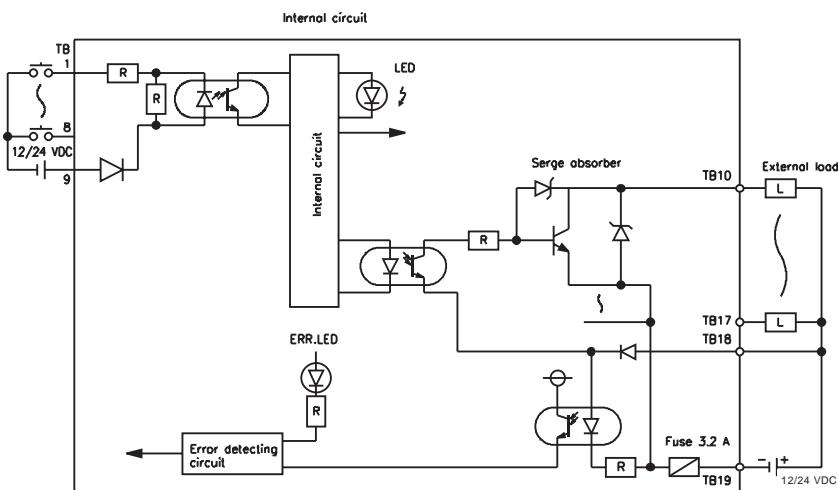**External Connections**

Pin No.	Signal Name
TB1	X00
TB2	X01
TB3	X02
TB4	X03
TB5	X04
TB6	X05
TB7	X06
TB8	X07
TB9	COM1
TB10	Y08
TB11	Y09
TB12	Y0A
TB13	Y0B
TB14	Y0C
TB15	Y0D
TB16	Y0E
TB17	Y0F
TB18	12/24 VDC
TB19	COM2
TB20	Vacant

\*1 : The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices.

If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.

\*2 : The ERR. indicating LED will also light when the external power supply is shut OFF.

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS


MELSEC-A

### 4.1.4 A1SJ-56DT I/O module

Can only be installed on an A1SJCPU (S3). Cannot be installed on an A1S3-B (S1) (main base unit), or an A1S6-B (S1) (extension base unit).

Output Specifications		Input Specifications	
Number of output points	24 points	Number of input points	32 points
Isolation method	Photocoupler	Isolation method	Photocoupler
Rated load voltage	24 VDC	Rated input voltage	24 VDC
Operating load voltage range	19.2 to 30 VDC (peak voltage: 30 VDC)	Rated input current	Approx. 7 mA
Maximum load current	0.5 A/point, 4 A/common	Operating voltage range	19.2 to 26.4 VDC (ripple: less than 5%)
Maximum inrush current	4 A 10 ms or less	ON voltage/ON current	14 VDC or higher/3.5 mA or higher
Leakage current at OFF circuit	0.1mA or less	OFF voltage/OFF current	6.5 VDC or lower/1.7 mA or lower
Maximum voltage drop at OFF circuit	0.9 V (TYP.) 0.5 A 1.5 V (MAX.) 0.5 A	Input resistance	Approx. 3.3 KΩ
Response time	OFF → ON ON → OFF	Input method	Sink input (method by which the input current flows out)
External power supply	Voltage Current	Response time	OFF → ON ON → OFF
Surge absorber	Zener diode	Common method	16 points/common (common terminal: TB17, TB34)
Common method	8 points/common (common terminal: TB10, TB20, TB30)	Operating indicator	Provided (the LED lights when the input is ON.)
Insulation withstand voltage	500 VAC	Maximum simultaneous input points	60 % (10 points/common) simultaneously ON
Noise immunity	500 VAC	Insulation withstand voltage	500 VAC
Operating indicator	Provided (the LED lights when the output is ON.)	Noise immunity	500 VAC
Number of I/O points	128 points (slot 0: output, 64 points; slots 1 to 4: vacant, 16 points)		
Internal current consumption (5 VDC)	220 mA (TYP. all points ON)		
External wiring connection method	34-point terminal block connector (M3.5 x 6 screw), 2 connectors		
Applicable cable size	0.75 to 2 mm <sup>2</sup> (Applicable tightening torque 69 N·cm {7 kg·cm})		
Applicable solderless terminal	R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Weight kg (lb)	0.7 (1.54)		

### External Connections

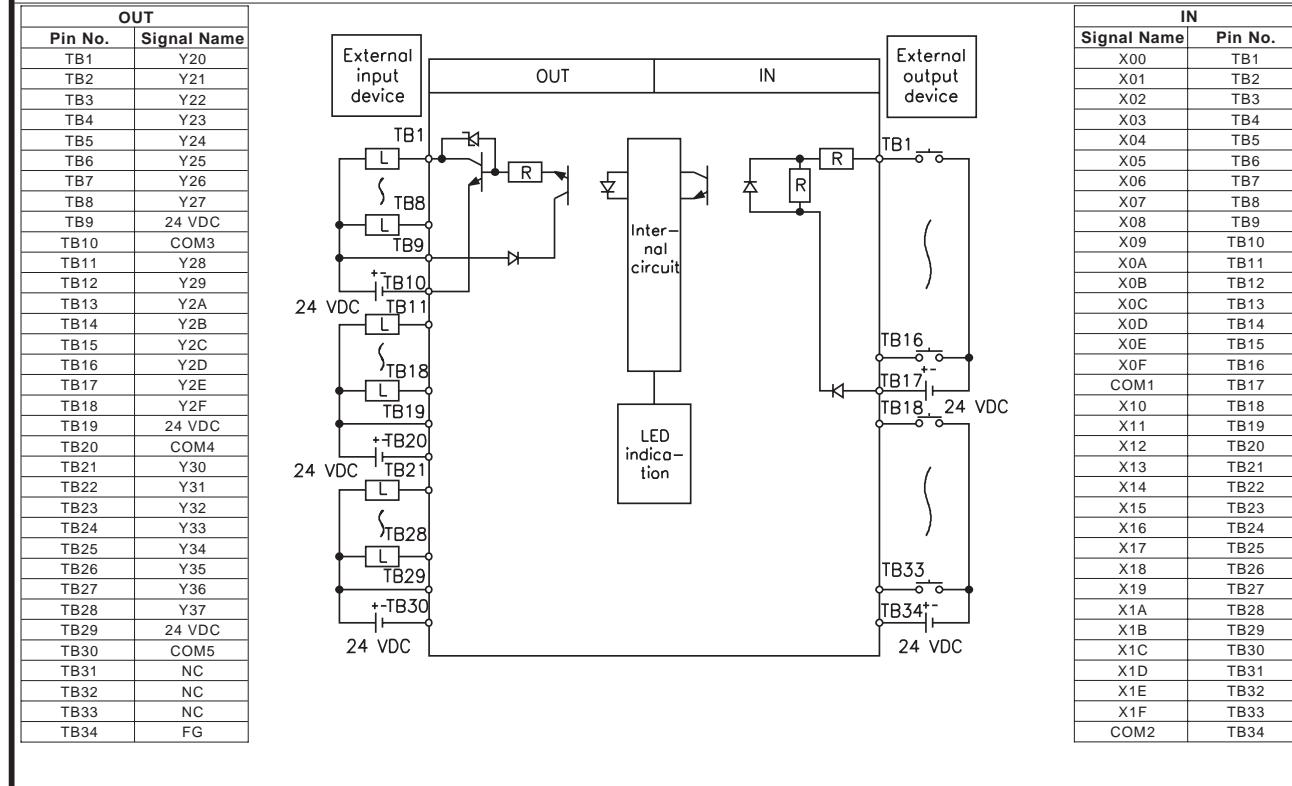

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A

### 4.1.5 A1SJ-56DR I/O module

Can only be installed on an A1SJCPU (S3). Cannot be installed on an A1S3[B (S1) (main base unit), or an A1S6[B (S1) (extension base unit).

Output Specifications		Input Specifications		
Number of output points		Number of input points		32 points
Isolation method		Isolation method		Photocoupler
Rated switching voltage and current		Rated input voltage		24 VDC
Minimum switching load		Rated input current		Approx. 7 mA
Max. switching voltage		Operating voltage range		19.2 to 26.4 VDC (ripple: less than 5%)
Max. switching frequency		ON voltage/ON current		14 VDC or higher/3.5 mA or higher
Mechanical		OFF voltage/OFF current		6.5 VDC or lower/1.7 mA or lower
Service life	Electrical	20,000,000 times of switching or over		Input resistance
		At rated switching voltage and current loads 100,000 times of switching or over		Input method
		At 200 VAC 1.5 A, 240 VAC 1 A (COSφ=0.7) 100,000 times of switching or over		Response time OFF → ON ON → OFF
		At 200 VAC 1 A, 240 VAC 0.5 A (COSφ=0.35) 100,000 times of switching or over		Common method
		At 24 VDC 1 A, 100 VDC 0.1 A (L/R = 7 ms) 100,000 times of switching or over		Operating indicator
Response time	OFF → ON	10 ms or less		Approx. 3.3 kΩ
	ON → OFF	12 ms or less		Sink input (method by which the input current flows out)
Insulation withstand voltage		1500 VAC		10 ms or less (24 VDC)
Noise immunity		1500 VAC		10 ms or less (24 VDC)
External power supply (relay coil drive)	Voltage	24 VDC ±10%, ripple voltage: 4 V <sub>P-P</sub> or less		16 points/common (common terminal: TB17, TB34)
	Current	140 mA (TYP. 24 VDC all points ON)		Provided (the LED lights when the input is ON.)
Surge absorber		None		
Common method		8 points/common (common terminal: TB9, TB18, TB27)		
Operating indicator		Provided (the LED lights when the output is ON.)		
Number of I/O points		128 points (slot 0: output, 64 points; slots 1 to 4: vacant, 16 points)		
Internal current consumption (5 VDC)		220 mA (TYP. all points ON)		
External wiring connection method		34-point terminal block connector (M3.5 x 6 screw), 2 connectors		
Applicable cable size		0.75 to 2 mm <sup>2</sup> (Applicable tightening torque 69 N·cm {7 kg·cm})		
Applicable solderless terminal		R1.25-3.5, R2-3.5 RAV1.25-3.5, RAV2-3.5		
Weight kg (lb)		0.8 (1.76)		
External Connections				
OUT				
Pin No.	Signal Name			
TB1	Y20			
TB2	Y21			
TB3	Y22			
TB4	Y23			
TB5	Y24			
TB6	Y25			
TB7	Y26			
TB8	Y27			
TB9	COM3			
TB10	NC			
TB11	Y28			
TB12	Y29			
TB13	Y2A			
TB14	Y2B			
TB15	Y2C			
TB16	Y2D			
TB17	Y2E			
TB18	Y2F			
TB19	COM4			
TB20	NC			
TB21	Y30			
TB22	Y31			
TB23	Y32			
TB24	Y33			
TB25	Y34			
TB26	Y35			
TB27	Y36			
TB28	Y37			
TB29	COM5			
TB30	NC			
TB31	NC			
TB32	24 VDC			
IN				
Signal Name	Pin No.			
X00	TB1			
X01	TB2			
X02	TB3			
X03	TB4			
X04	TB5			
X05	TB6			
X06	TB7			
X07	TB8			
X08	TB9			
X09	TB10			
X0A	TB11			
X0B	TB12			
X0C	TB13			
X0D	TB14			
X0E	TB15			
X0F	TB16			
COM1	TB17			
X10	TB18			
X11	TB19			
X12	TB20			
X13	TB21			
X14	TB22			
X15	TB23			
X16	TB24			
X17	TB25			
X18	TB26			
X19	TB27			
X1A	TB28			
X1B	TB29			
X1C	TB30			
X1D	TB31			
X1E	TB32			

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A

### 4.2 Dynamic Input/Output Module Specifications

#### 4.2.1 A1S42X dynamic input module





Model	Dynamic Input Module		Appearance																																																				
	A1S42X																																																						
Specifications																																																							
Number of input points *1	16/32/48/64 points (switch setting)																																																						
Isolation method	Photocoupler																																																						
Rated input voltage	12 VDC	24 VDC																																																					
Rated input current	Approx. 4 mA	Approx. 9 mA																																																					
Operating voltage range	10.2 to 26.4 VDC (ripple : less than 5 %)																																																						
Max. simultaneous input points	100 % simultaneously ON (at 26.4 VDC)																																																						
ON voltage/ON current	8 VDC or higher/2 mA or higher																																																						
OFF voltage/OFF current	4 VDC or lower/1 mA or lower																																																						
Input resistance	Approx. 2.4 kΩ																																																						
Response time	OFF → ON	0.4 ms or less (24 VDC)																																																					
	ON → OFF	0.4 ms or less (24 VDC)																																																					
Dynamic scan cycle	13.3 ms																																																						
Operating indicator	On state is indicated (LEDs), 32-bit indication by switch																																																						
External connections	24-pin connector																																																						
Applicable wire size	0.3 mm <sup>2</sup>																																																						
Accessories	Connector (1 pce.) for external wiring (soldering type)																																																						
Insulation withstand voltage	500 VAC																																																						
Noise immunity	500 VAC																																																						
Internal current consumption (5 VDC)	80 mA (TYP, all points ON)																																																						
Weight kg (lb)	0.18 (0.40)																																																						
External Connections																																																							
<table border="1"> <thead> <tr> <th>Pin No.</th> <th>Signal Name</th> <th>Pin No.</th> <th>Signal Name</th> </tr> </thead> <tbody> <tr> <td>B12</td> <td>XD0</td> <td>A12</td> <td>XD1</td> </tr> <tr> <td>B11</td> <td>XD2</td> <td>A11</td> <td>XD3</td> </tr> <tr> <td>B10</td> <td>XD4</td> <td>A10</td> <td>XD5</td> </tr> <tr> <td>B9</td> <td>XD6</td> <td>A9</td> <td>XD7</td> </tr> <tr> <td>B8</td> <td>XSCN0</td> <td>A8</td> <td>XSCN1</td> </tr> <tr> <td>B7</td> <td>XSCN2</td> <td>A7</td> <td>XSCN3</td> </tr> <tr> <td>B6</td> <td>XSCN4</td> <td>A6</td> <td>XSCN5</td> </tr> <tr> <td>B5</td> <td>XSCN6</td> <td>A5</td> <td>XSCN7</td> </tr> <tr> <td>B4</td> <td>Vacant</td> <td>A4</td> <td>Vacant</td> </tr> <tr> <td>B3</td> <td>12/24 VDC</td> <td>A3</td> <td>12/24 VDC</td> </tr> <tr> <td>B2</td> <td>0V</td> <td>A2</td> <td>0V</td> </tr> <tr> <td>B1</td> <td>FG</td> <td>A1</td> <td>FG</td> </tr> </tbody> </table>				Pin No.	Signal Name	Pin No.	Signal Name	B12	XD0	A12	XD1	B11	XD2	A11	XD3	B10	XD4	A10	XD5	B9	XD6	A9	XD7	B8	XSCN0	A8	XSCN1	B7	XSCN2	A7	XSCN3	B6	XSCN4	A6	XSCN5	B5	XSCN6	A5	XSCN7	B4	Vacant	A4	Vacant	B3	12/24 VDC	A3	12/24 VDC	B2	0V	A2	0V	B1	FG	A1	FG
Pin No.	Signal Name	Pin No.	Signal Name																																																				
B12	XD0	A12	XD1																																																				
B11	XD2	A11	XD3																																																				
B10	XD4	A10	XD5																																																				
B9	XD6	A9	XD7																																																				
B8	XSCN0	A8	XSCN1																																																				
B7	XSCN2	A7	XSCN3																																																				
B6	XSCN4	A6	XSCN5																																																				
B5	XSCN6	A5	XSCN7																																																				
B4	Vacant	A4	Vacant																																																				
B3	12/24 VDC	A3	12/24 VDC																																																				
B2	0V	A2	0V																																																				
B1	FG	A1	FG																																																				
<p>*1 Be sure to connect a diode to each switch if there will be any occasions where 2 or more switches are pressed simultaneously. (Refer to the figure on the right.)</p>																																																							

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A


### (1) Number of occupied I/O points setting

The Number of occupied I/O points is set by the DIP switches on the front face of the module. It is factory-set to 64 points.

Number of occupied I/O points	16 points	32 points	48 points	64 points
Switch setting	SW 1 2 	SW 1 2 	SW 1 2 	SW 1 2 

### (2) Dynamic scan method

In the dynamic scan method, the whole number of occupied I/O points is divided into several groups of a specified number of points, and processed in several scans. 64 input points are divided into 8 groups of 8 points, and processed group by group as shown in the figure below. Regardless of whether the number of occupied I/O points is set at 16, 32, or 48 points, the dynamic scan cycle is fixed at 13.3 ms.

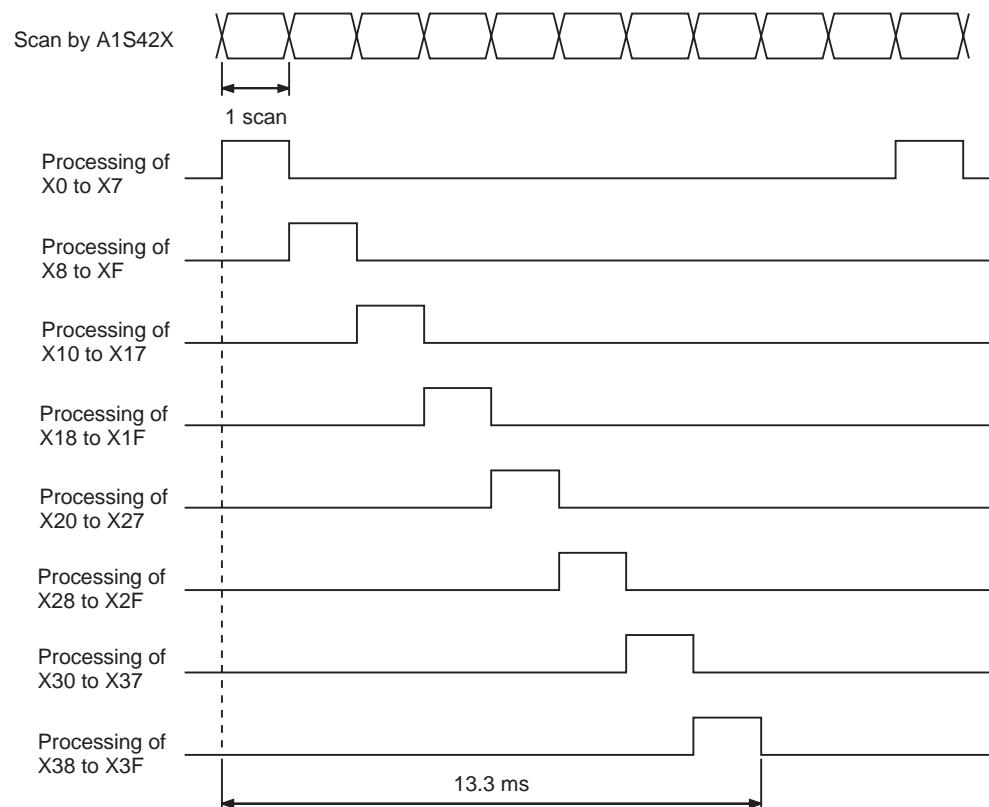

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A

### 4.2.2 A1S42Y dynamic output module

Model	Dynamic Output Module		Appearance
	A1S42Y		
Specifications			
Number of output points	16/32/48/64 points (switch setting)		
Isolation method	Photocoupler		
Rated load voltage	12/24 VDC		
Operating voltage range	10.2 to 26.4 VDC (ripple : less than 5 %)		
Max. load current	0.1 A/point		
Leakage current at OFF circuit	0.1 mA or less		
Max. voltage drop at ON circuit	Source : 1.1 VDC, Sink : 1.5 VDC		
Response time	OFF → ON	2 ms or less (resistive load)	
	ON → OFF	2 ms or less (resistive load)	
Fuse rating	Fuse 1.6 A, not replaceable *1		
Fuse capacity	50 A		
Error display	LED goes ON when fuse blows : signal output to PC CPU *2		
Operating indicator	On state is indicated (LEDs), 32-bit indication by switch		
External connections	24-pin connector		
Applicable wire size	0.3 mm <sup>2</sup>		
Accessories	Connector (1 pce.) for external wiring (soldering type)		
Insulation withstand voltage	500 VAC		
Noise immunity	500 VAC		
External power supply	Voltage	12/24 VDC (10.2 to 26.4 VDC)	
	Current	8 mA (TYP, 24 VDC/common)	
Internal current consumption (5 VDC)	100 mA (TYP, all points ON)		
Weight kg (lb)	0.19 (0.42)		

External Connections			
Pin No. *3 Resistance for restricting LED current Output terminals			

Pin Arrangement			
			A12
			A11
			A10
			A9
			A8
			A7
			A6
			A5
			A4
			A3
			A2
			A1
Front view			
Pin No.	Signal Name (FH)	Pin No.	Signal Name (FH)
B12	YD0	A12	YD1
B11	YD2	A11	YD3
B10	YD4	A10	YD5
B9	YD6	A9	YD7
B8	YSCN0	A8	YSCN1
B7	YSCN2	A7	YSCN3
B6	YSCN4	A6	YSCN5
B5	YSCN6	A5	YSCN7
B4	Vacant	A4	Vacant
B3	12/24 VDC	A3	12/24 VDC
B2	0V	A2	0V
B1	Vacant	A1	Vacant

*1	The fuse in the output module is provided to prevent the external wiring from burning in the event of a short in the module's output. Therefore, it may not be able to protect output devices. If an output device is damaged in a failure mode other than a short circuit, the fuse might not blow.
*2	The ERR. indicating LED will also light when the external power supply is shut OFF.
*3	Install the resistance for restricting LED current outside the A1S42Y module.
*4	The power supply voltage(24/12 VDC) is applied to the reverse direction of the LED. If the opposite voltage resistance is not sufficient, connect a diode for serial protection to each LED.

## 4. INPUT/OUTPUT COMPOSITE MODULE SPECIFICATIONS

MELSEC-A

### (1) Number of occupied I/O points setting


The number of occupied I/O points is set using the DIP switches on the front face of the module. It is factory-set to 64 points.

Number of occupied I/O points	16 points	32 points	48 points	64 points
Switch setting	SW 1 2 _____ ZO	SW 1 2 _____ ZO	SW 1 2 _____ ZO	SW 1 2 _____ ZO

### (2) Dynamic scan method and dynamic scan cycle setting

#### (a) Dynamic scan method

In the dynamic scan method, the whole number of occupied I/O points is divided into several groups of a specified number of points, and processed in several scans. 64 input points are divided into 8 groups of 8 points, and processed group by group as shown in the figure below. Regardless of whether the number of occupied I/O points is set at 16, 32, or 48 points, the dynamic scan cycle is fixed at 13.3/106.7 ms.

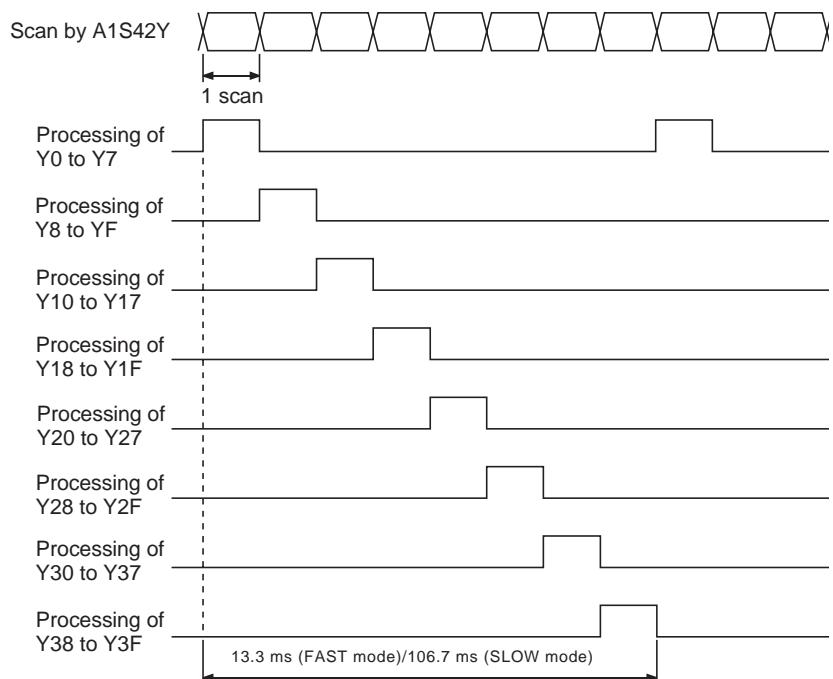

#### (b) Dynamic scan cycle setting

The dynamic scan cycle is set using the DIP switches on the rear face of the module. It is factory-set to FAST mode.

FAST mode	SLOW mode
SW 1 2 _____ ZO Module top	SW 1 2 _____ ZO Module top

## 5. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES

MELSEC-A

### 5. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES

#### 5.1 Specifications of Connector/Terminal Block Convertor Modules

**Table 5.1 Connector/Terminal Block Convertor Module Specifications**

	Type	Details	Applicable Models
Connector/terminal block converter unit	A6TBXY36	For sink type input modules and sink type output modules (standard type)	A1SX41(S2), A1SX42(S2), A1SY41, A1SY42, A1SH42
	A6TBXY54	For sink type input modules and sink type output modules (2-wire type)	
	A6TBX70	For sink type input modules (3-wire type)	
	A6TBX36-E	For source type input modules (standard type)	
	A6TBY36-E	For source type output modules (standard type)	
	A6TBX54-E	For source type input modules (2-wire type)	
	A6TBY54-E	For source type output modules (2-wire type)	
	A6TBX70-E	For source type input modules (3-wire type)	
Cable	AC05TB	0.5 m (19.69 in.), for sink modules	A6TBXY36 ATBXY54 A6TBX70
	AC10TB	1 m (39.37 in.), for sink modules	
	AC20TB	2 m (78.74 in.), for sink modules	
	AC30TB	3 m (118.11 in.), for sink modules	
	AC50TB	5 m (196.85 in.), for sink modules	
	AC80TB	8 m (314.96 in.), for sink modules (common current not exceeding 0.5 A)	
	AC100TB	10 m (393.7 in.), for sink modules (common current not exceeding 0.5 A)	A6TBX36-E A6TBY36-E A6TBX54-E A6TBY54-E A6TBX70-E
	AC05TB-E	0.5 m (19.69 in.), for source modules	
	AC10TB-E	1 m (39.37 in.), for source modules	
	AC20TB-E	2 m (78.74 in.), for source modules	
	AC30TB-E	3 m (118.11 in.), for source modules	
	AC50TB-E	5 m (196.85 in.), for source modules	

#### IMPORTANT

- (1) The A1SX81 is a sink/source combination type, but nevertheless it should be used only with A6TBX36-E, A6TBX54, or A6TB70-E. A6TBXY36, A6TBXY54, and A6TBX70 cannot be used with it.
- (2) The number of connectable I/O points is 32 for all connector/terminal block convertor modules.  
Two connector/terminal block convertor modules and two cables for connector/terminal block convertor modules are required for 64-point I/O modules.


## 5. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES

MELSEC-A


### 5.2 Connector/Terminal Block Convertor Module Connection Diagrams

#### 5.2.1 A6TBXY36

(a) When connecting an input module

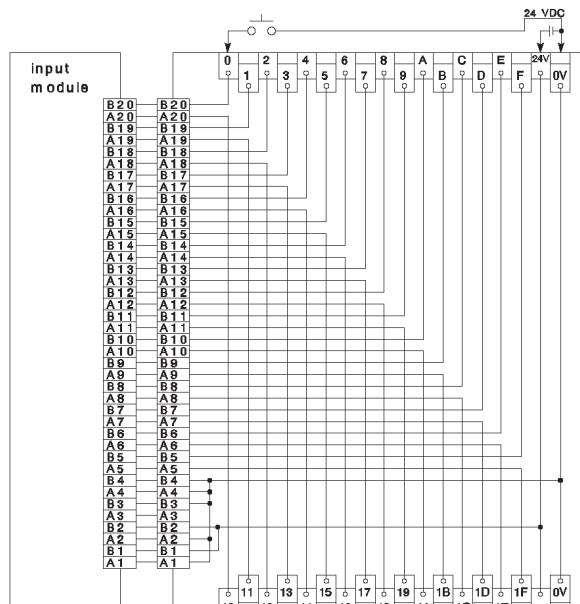


(b) When connecting an output module

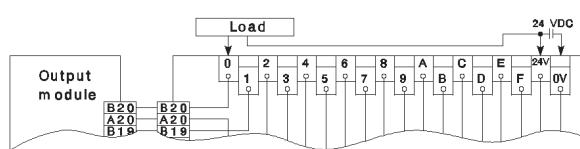


#### 5.2.2 A6TBXY54

(a) When connecting an input module

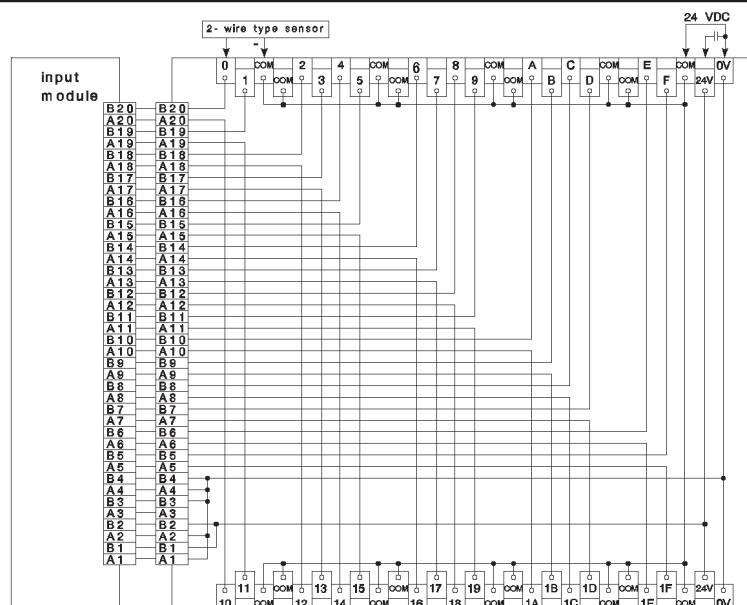


(b) When connecting an output module

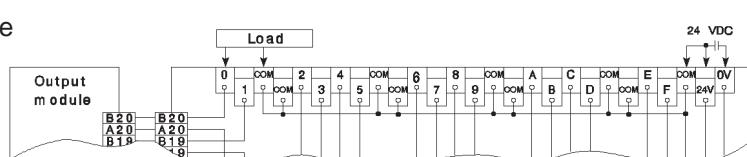


## 5. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES

MELSEC-A

### 5.2.3 A6TBX70

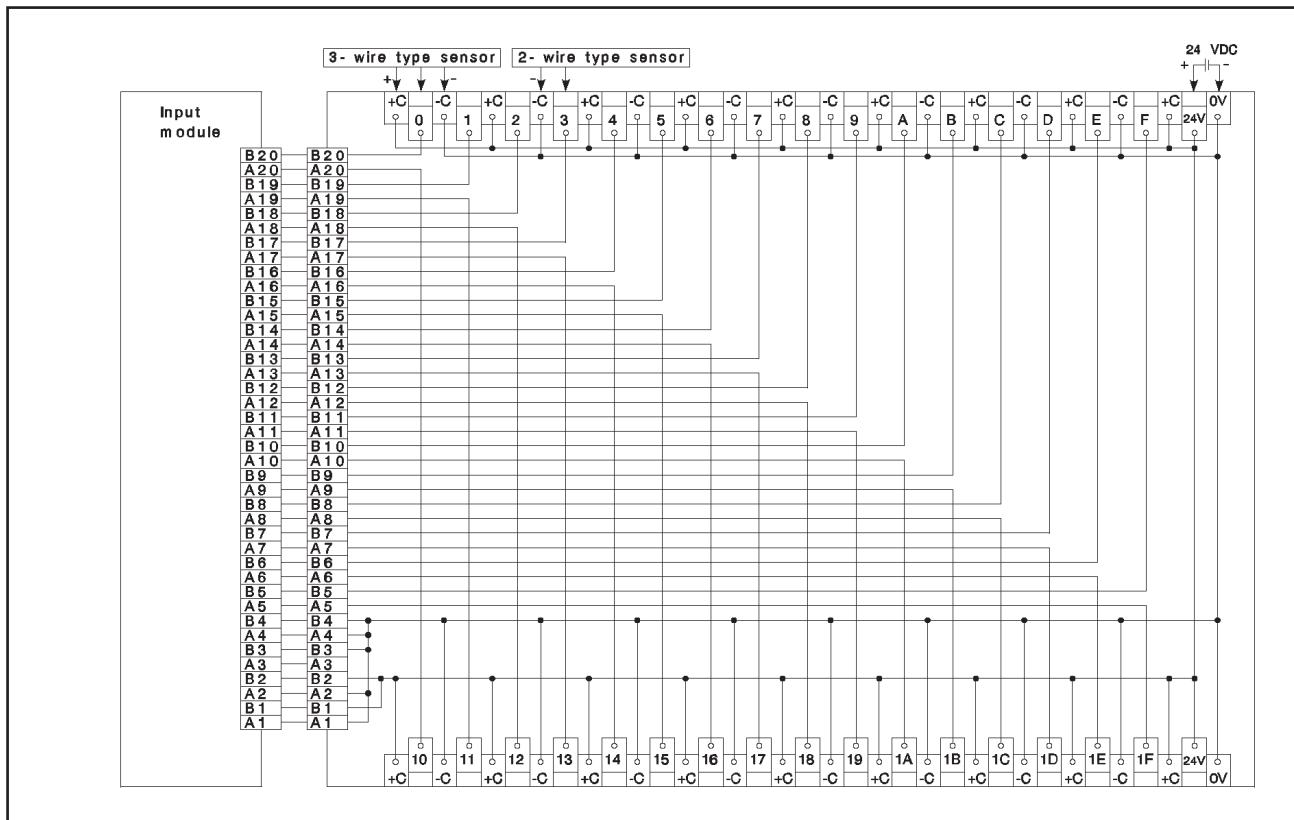


### 5.2.4 A6TBX36-E

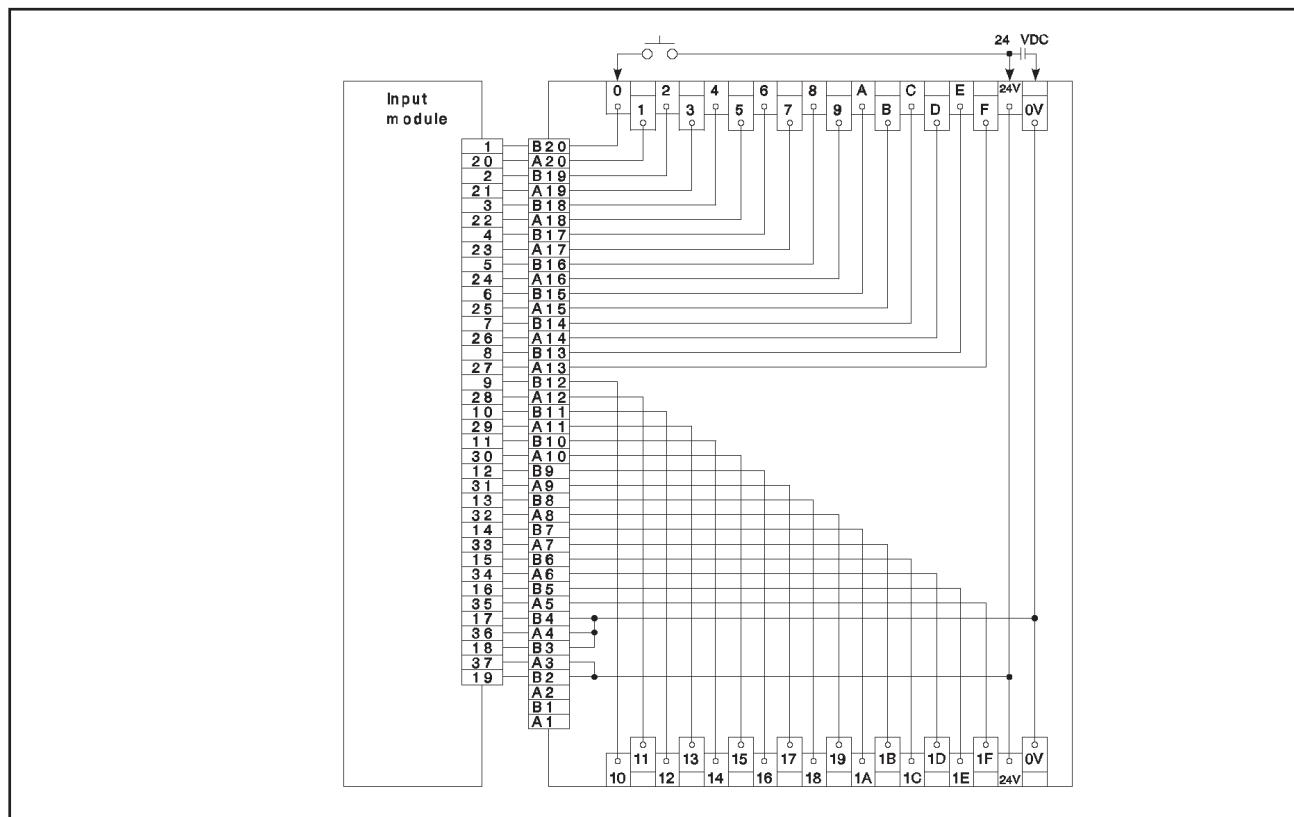


## 5. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES

MELSEC-A

### 5.2.5 A6TBY36-E

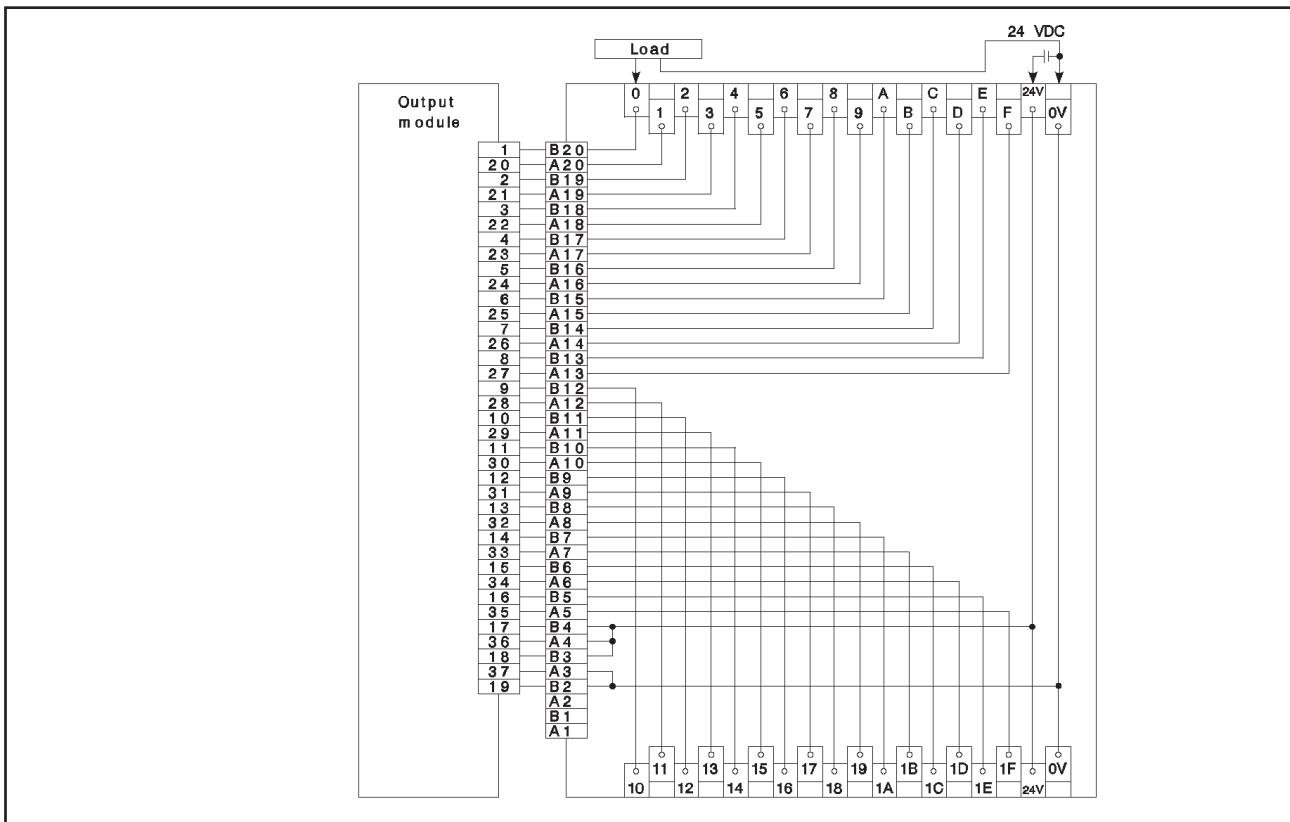


### 5.2.6 A6TBX54-E

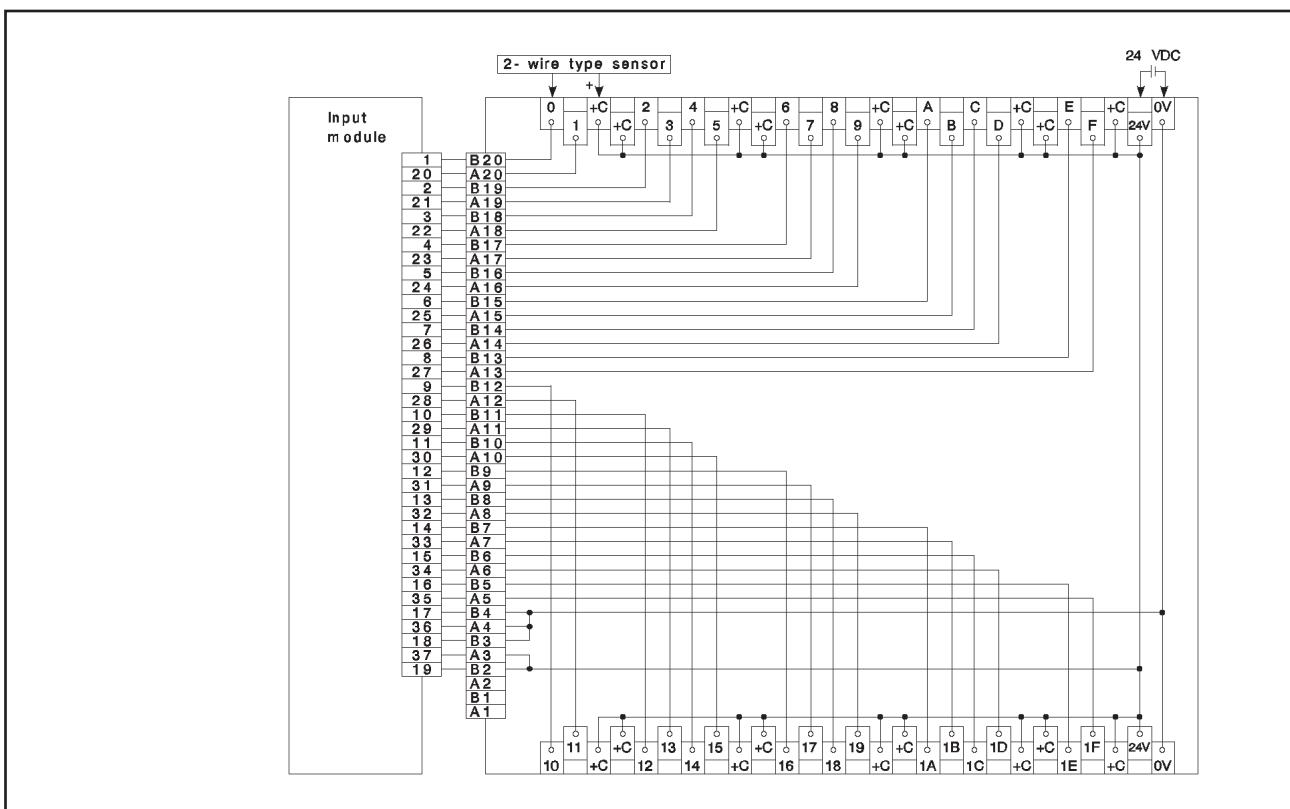


## 5. SPECIFICATIONS OF CONNECTOR/TERMINAL BLOCK CONVERTOR MODULES

MELSEC-A

### 5.2.7 A6TBY54-E

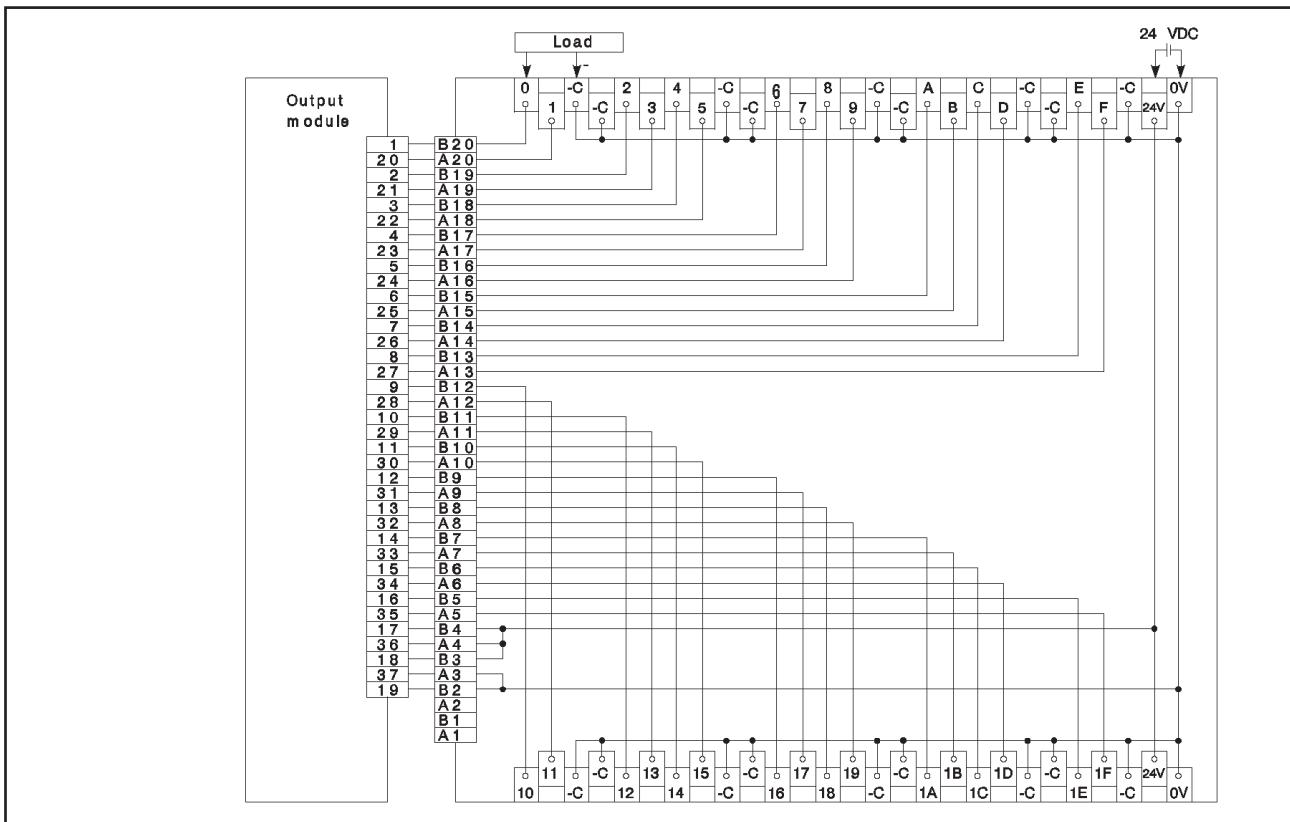

### 5.2.8 A6TBX70-E

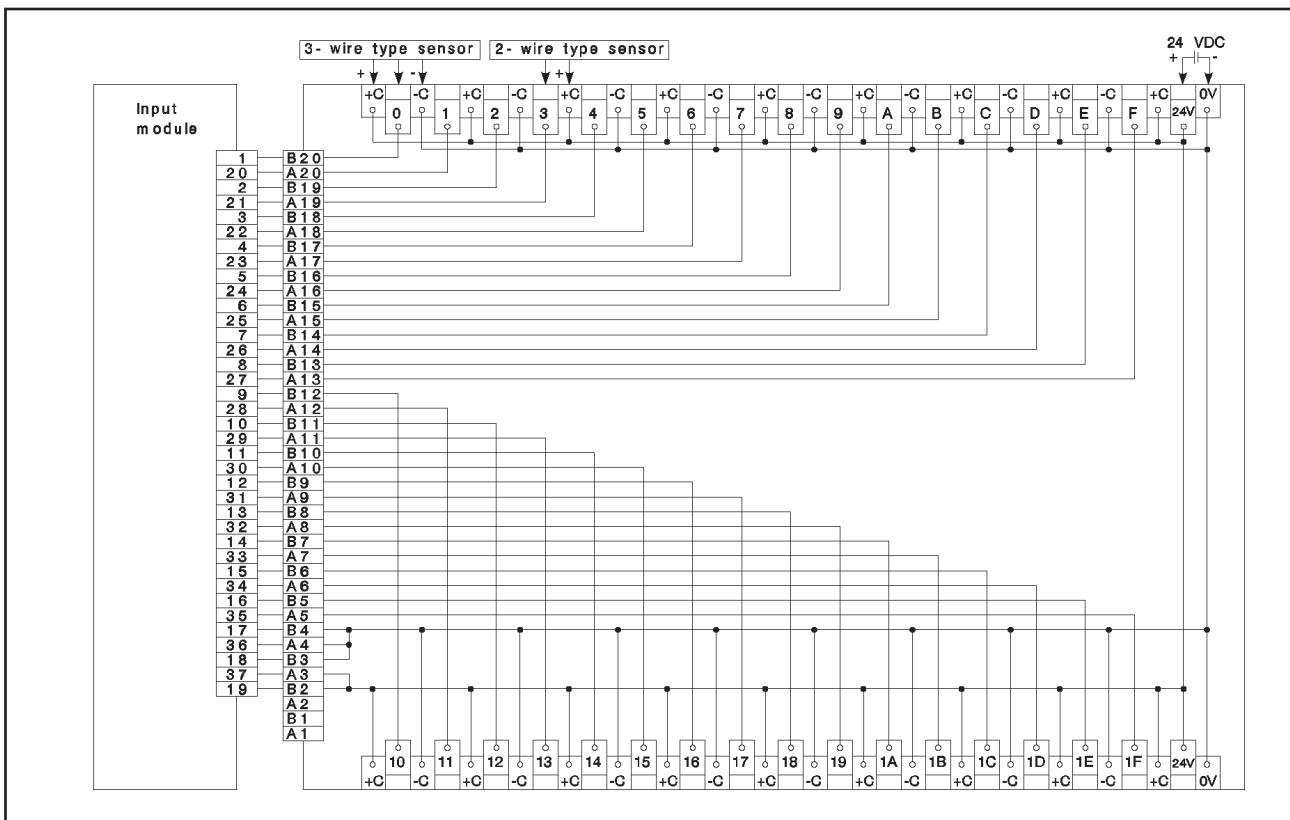

## 6. BLANK COVER, DUMMY MODULE SPECIFICATIONS

MELSEC-A

### 6. BLANK COVER, DUMMY MODULE SPECIFICATIONS

#### 6.1 Blank Cover (A1SG60), Dummy Module (A1SG62) Specifications

The A1SG60 blank cover is used to protect base unit vacant slots against dust etc.




The A1SG62 dummy module is used to reserve a specified number of I/O points at any base unit slot.

**Table 6.1 Dummy Module, Blank Cover Specifications**

Model Item	A1SG60	A1SG62
Occupied I/O points	16 points	Max. 64 (16, 32, 48, or 64 points can be selected by using a select switch on the front of the module.)
I/O allocation specification	16 vacant points	□ input (X) points Designate the number of points set with the select switch in the □
Purpose	Used as a dust preventive cover for an unused slot where no input/output module is installed (e. g., a vacant slot between modules).	A module used to reserve 16, 32, 48, or 64 points for an I/O module to be installed in the future.
Other functions	—	Equipped with simulation switches for 16 points beginning with the head I/O number: inputs can be turned ON/OFF without using any external switch.
Internal current consumption (5 VDC)	—	60 mA
Outside dimensions (mm)(in)	130(H) x 34.5(W) x 93.6 (D) (5.12 x 1.36 x 3.69)	130(H) x 34.5(W) x 93.6 (D) (5.12 x 1.36 x 3.69)
Weight (kg)(lb)	0.08 (0.18)	0.13 (0.29)


#### 6.2 Setting the Occupying Number of Inputs/Outputs for A1SG62

Set the switches for setting the occupying number inputs/outputs (DIP switches) on the front of the module. The factory setting is 16 points.

Occupying number of inputs/outputs	16 points	32 points	48 points	64 points
Switch settings	SW1  SW2	SW1  SW2	SW1  SW2	SW1  SW2

## 6. NAMES OF PARTS AND SETTINGS


MELSEC-A

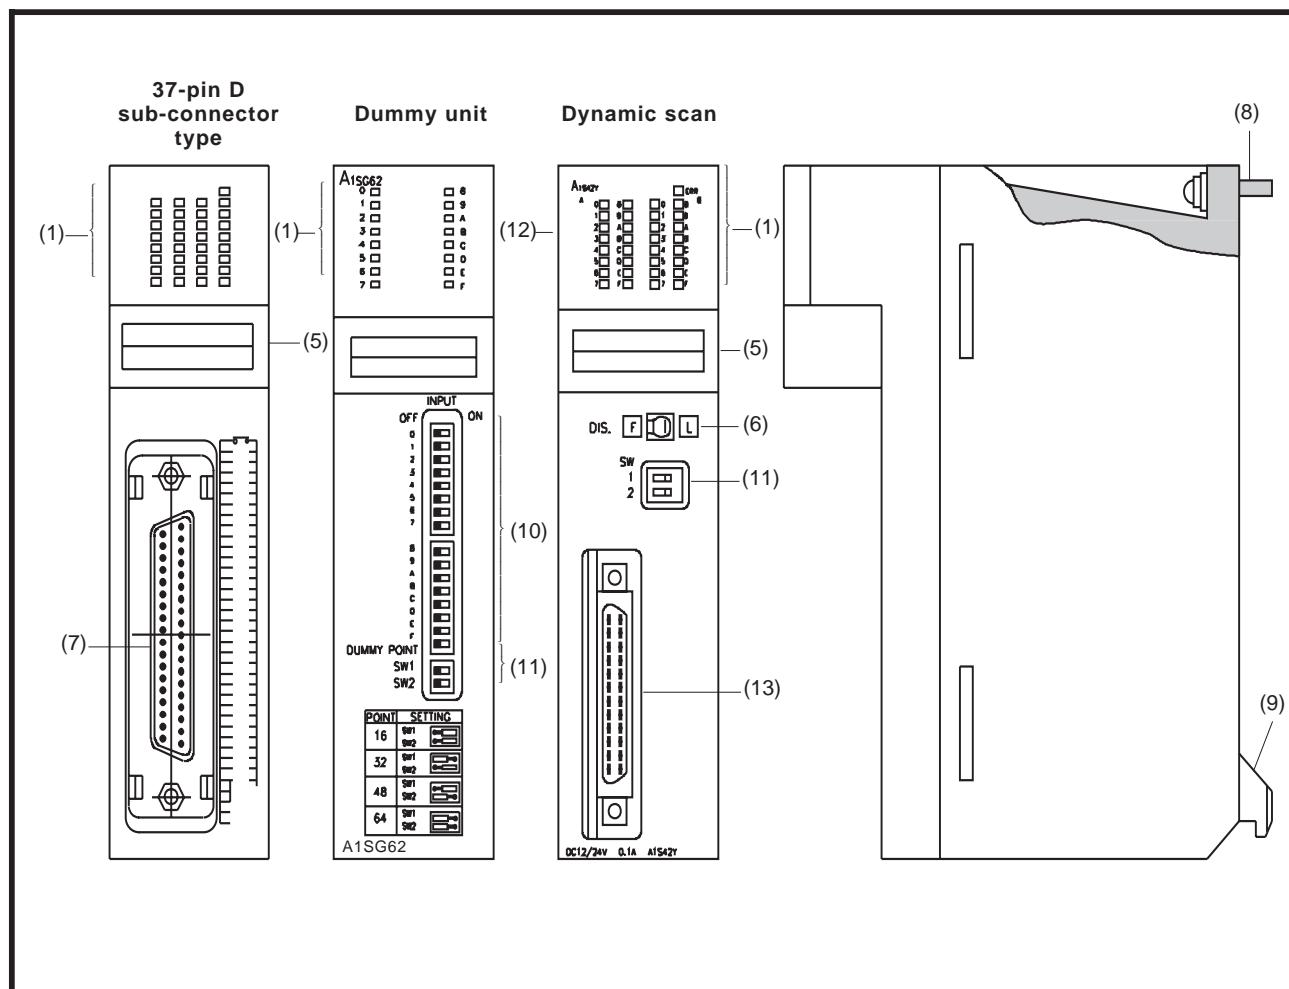

No.	Name	Description
(10)	Simulation switches	Used for input simulation. 16 points beginning with the head I/O number of the dummy module are allocated.
(11)	Occupied I/O points	16, 32, 48, or 64 points can be selected for the occupied I/O points.
(12)	Dynamic scan cycle	Used to set the dynamic scan cycle at 13.3 msec (FAST mode) or 106.7 msec (SLOW mode). (This switch is located on the rear face of the module.)
(13)	24-pin connector	Used for the dynamic scan I/O module to connect a power supply cable and I/O signal wires.

## 6. NAMES OF PARTS AND SETTINGS

MELSEC-A

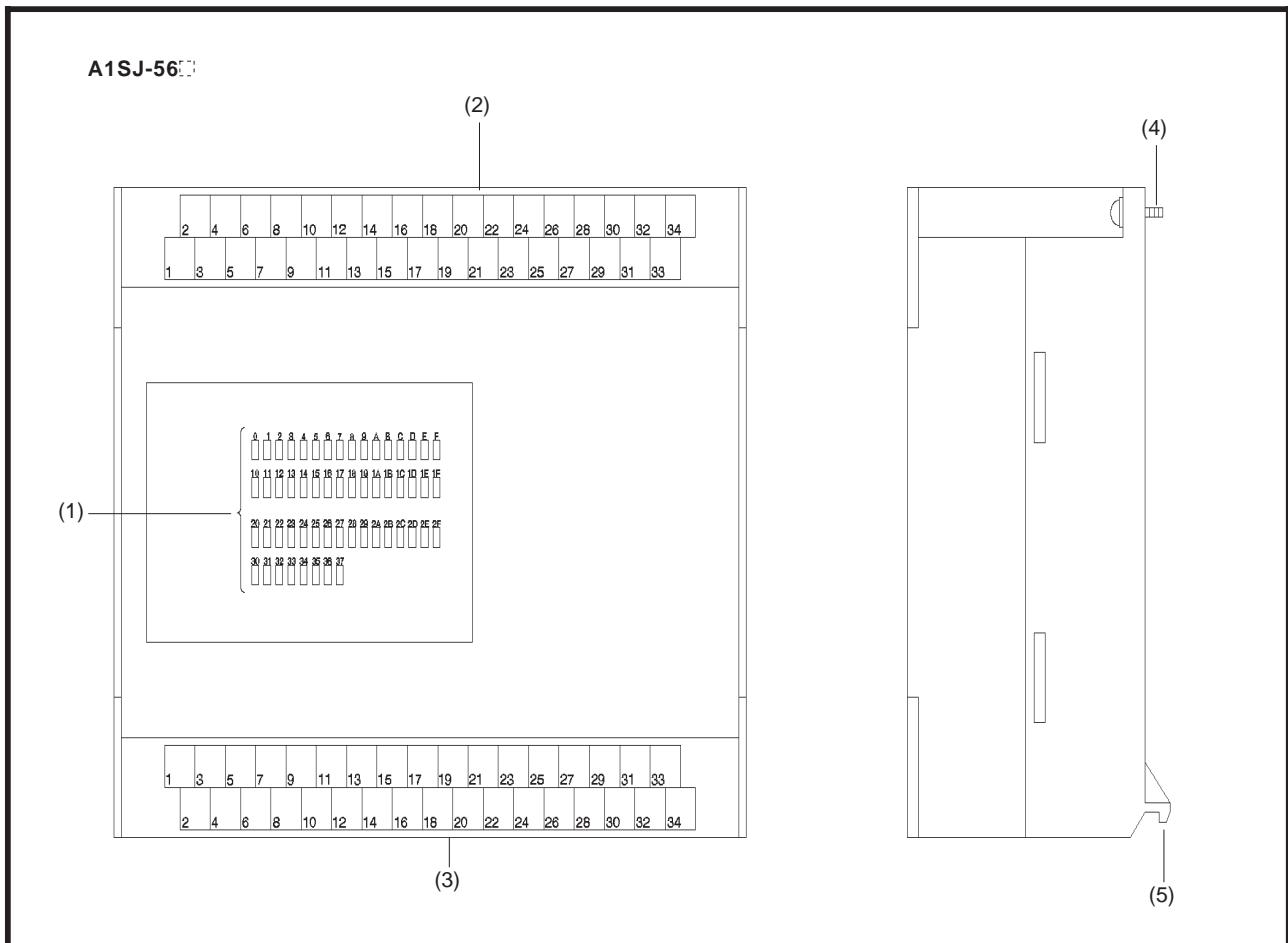


No.	Name	Description
(1)	I/O indicator LED	Indicates the ON/OFF state of input and output. Indicates the ON state when it is lit. 0 to 1F: input X0 to 1F, 20 to 37: Y20 to 37
(2)	Terminal block	Used to connect a power cable and input cables.
(3)	Terminal block	Used to connect a power cable and output cables.
(4)	Module mounting screw	Used to fix the module to the base unit.
(5)	Module mounting hook	Engages with the mounting hole in the base unit to secure the module.

## 7. NAMES OF PARTS AND SETTINGS

MELSEC-A

### 7. NAMES OF PARTS AND SETTINGS

The figures and table below show the names of the parts of I/O modules.

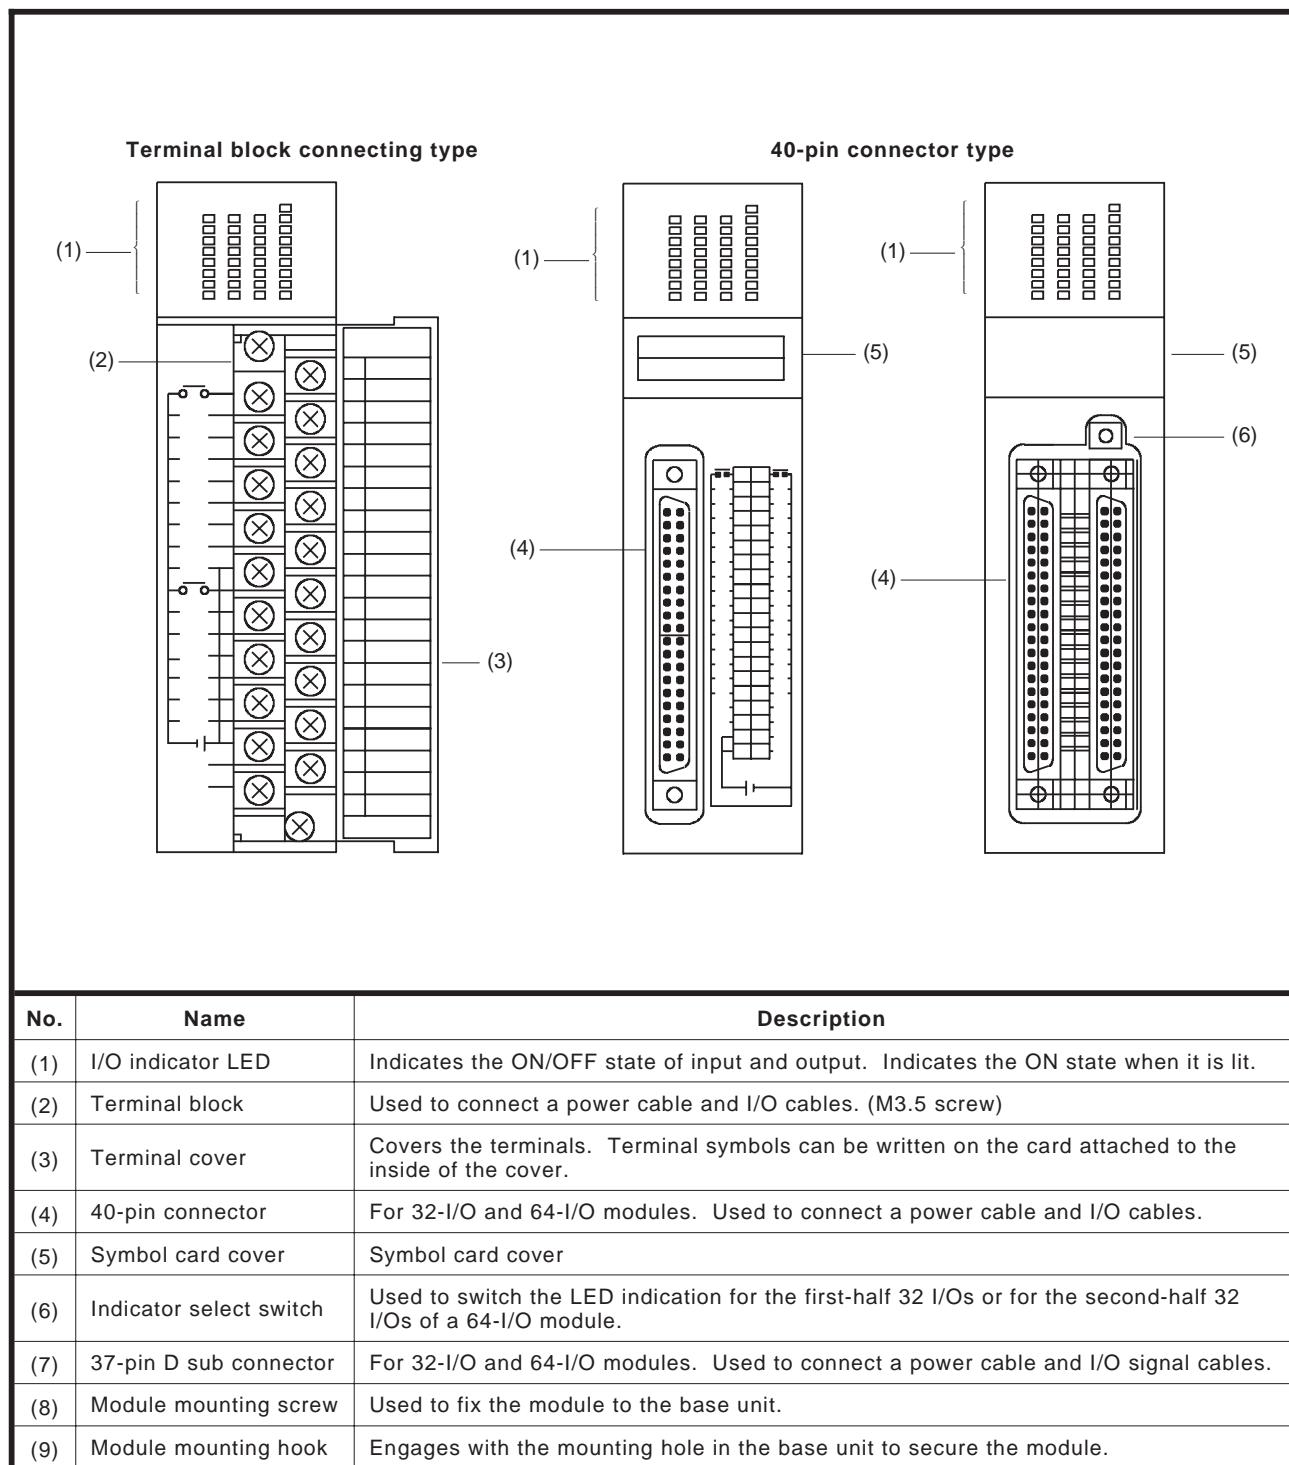


#### REMARK

When removing the terminal symbol card, lift up the edge of the card a little to pull it out of the terminal cover smoothly.

## 7. NAMES OF PARTS AND SETTINGS


MELSEC-A

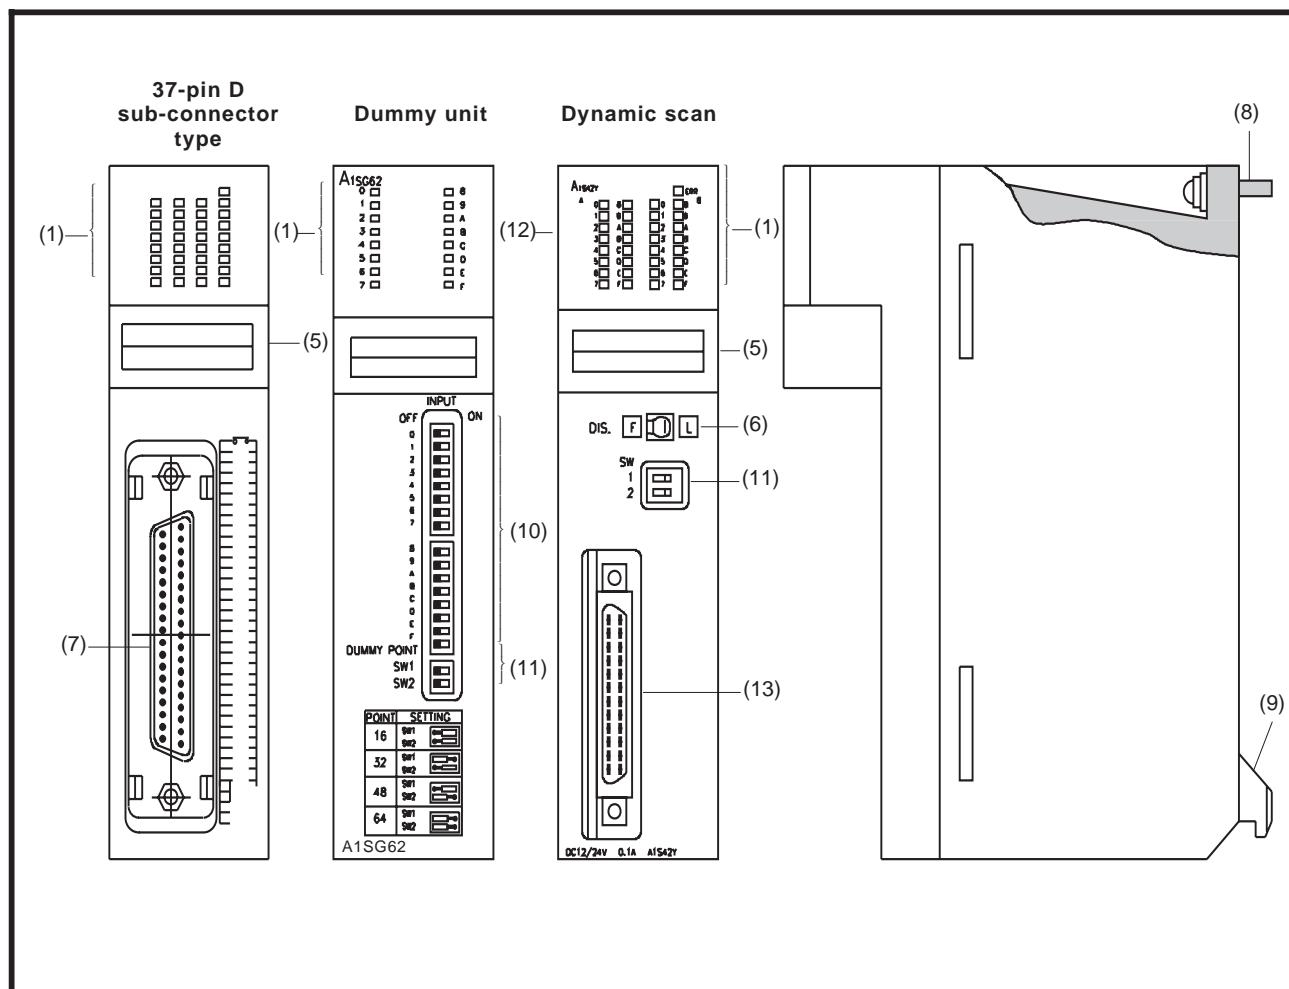

No.	Name	Description
(10)	Simulation switches	Used for input simulation. 16 points beginning with the head I/O number of the dummy module are allocated.
(11)	Occupied I/O points	16, 32, 48, or 64 points can be selected for the occupied I/O points.
(12)	Dynamic scan cycle	Used to set the dynamic scan cycle at 13.3 msec (FAST mode) or 106.7 msec (SLOW mode). (This switch is located on the rear face of the module.)
(13)	24-pin connector	Used for the dynamic scan I/O module to connect a power supply cable and I/O signal wires.

## 7. NAMES OF PARTS AND SETTINGS

MELSEC-A

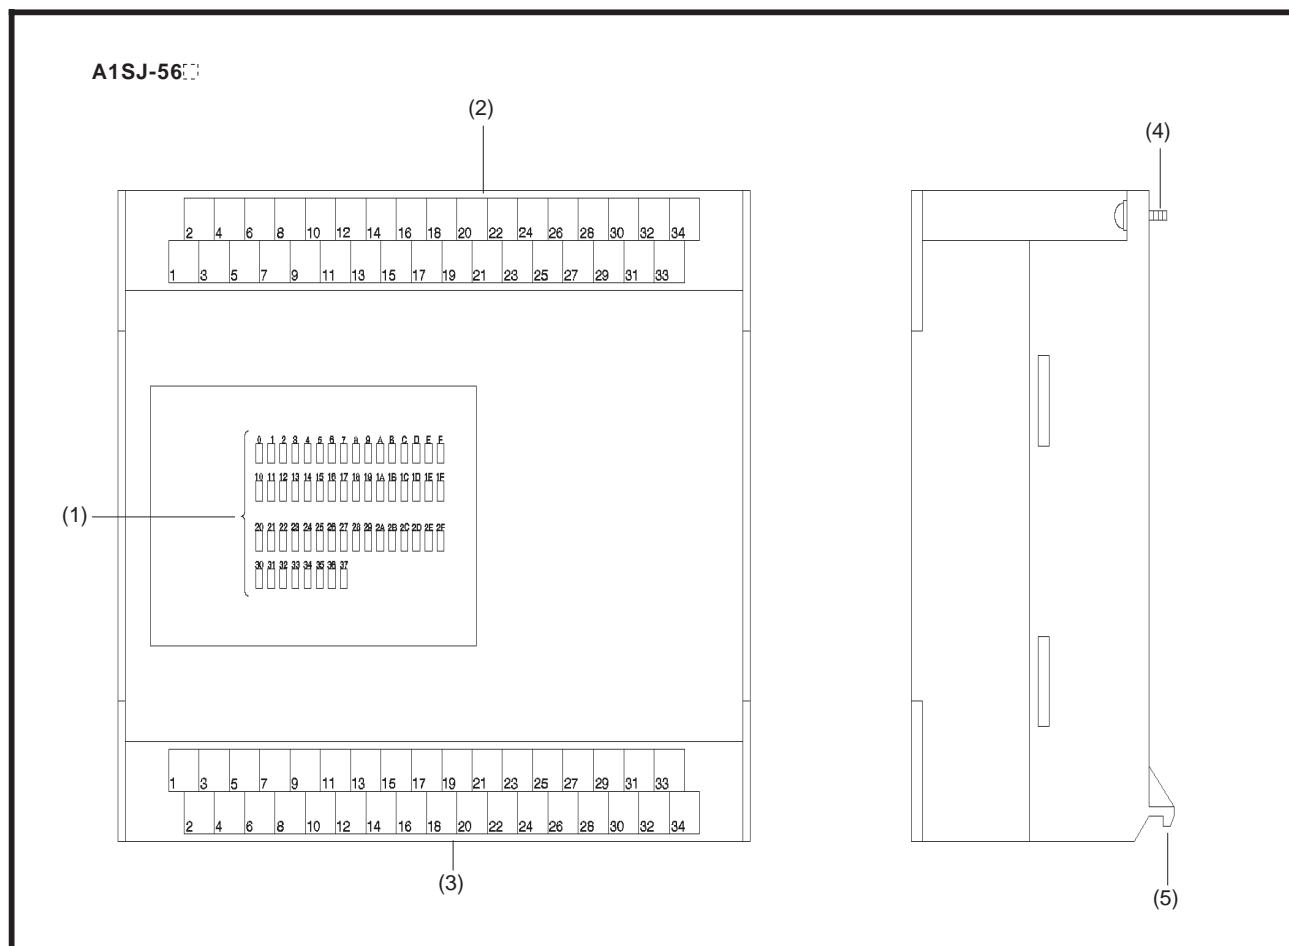


No.	Name	Description
(1)	I/O indicator LED	Indicates the ON/OFF state of input and output. Indicates the ON state when it is lit. 0 to 1F: input X0 to 1F, 20 to 37: Y20 to 37
(2)	Terminal block	Used to connect a power cable and input cables.
(3)	Terminal block	Used to connect a power cable and output cables.
(4)	Module mounting screw	Used to fix the module to the base unit.
(5)	Module mounting hook	Engages with the mounting hole in the base unit to secure the module.

## 7. NAMES OF PARTS AND SETTINGS

MELSEC-A

A6TB[36]

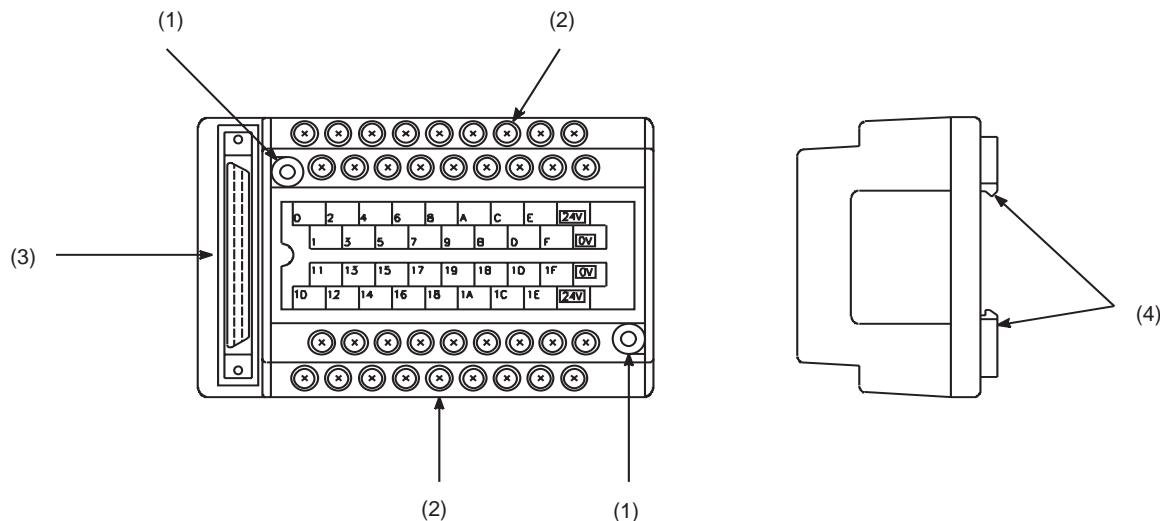


No.	Name	Description
(1)	Panel mounting hole	Panel mounting hole (for M4 screws)
(2)	Terminal block	Terminal block that connects power supply and signal wires
(3)	40-pin connector	40-pin connector for a 32-point module; connects power supply and input signal wires
(4)	Module fixing hooks	Hooks for mounting on a DIN rail

## 7. NAMES OF PARTS AND SETTINGS

MELSEC-A

A6TB[54]

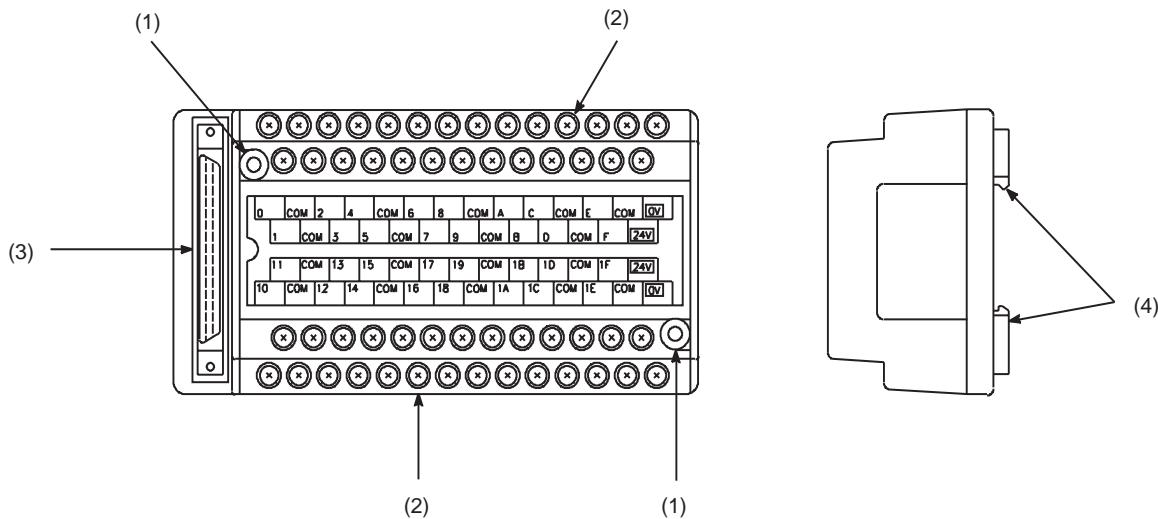


No.	Name	Description
(1)	Panel mounting hole	Panel mounting hole (for M4 screws)
(2)	Terminal block	Terminal block that connects power supply and signal wires
(3)	40-pin connector	40-pin connector for a 32-point module; connects power supply and input signal wires
(4)	Module fixing hooks	Hooks for mounting on a DIN rail

## 7. NAMES OF PARTS AND SETTINGS

MELSEC-A

A6TBX70

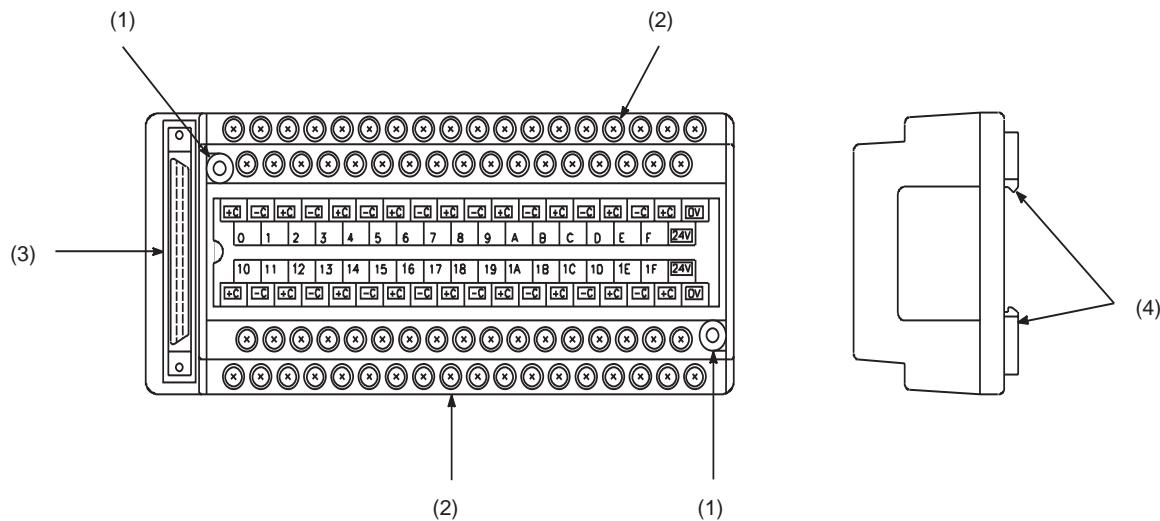

No.	Name	Description
(1)	Panel mounting hole	Panel mounting hole (for M4 screws)
(2)	Terminal block	Terminal block that connects power supply and signal wires
(3)	40-pin connector	40-pin connector for a 32-point module; connects power supply and input signal wires
(4)	Module fixing hooks	Hooks for mounting on a DIN rail








### 8. I/O CONNECTION TROUBLESHOOTING

This section explains possible problems with I/O circuits.

#### 8.1 Input Circuit Troubleshooting



This section describes possible problems with input circuits, and corrective action.

**Table 8.1 Input Circuit Problems and Corrective Action**

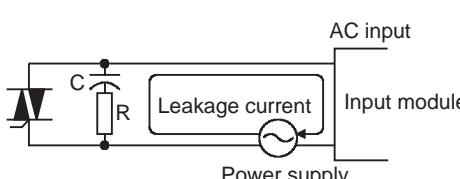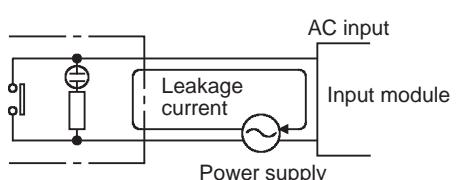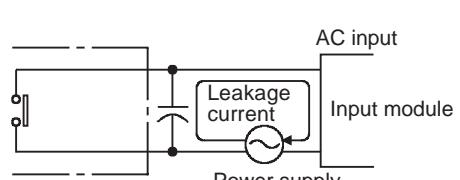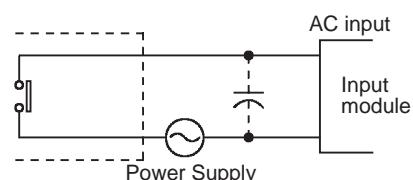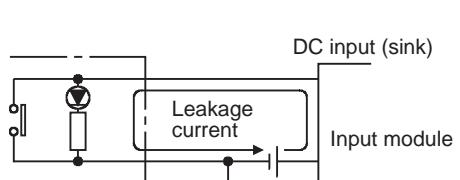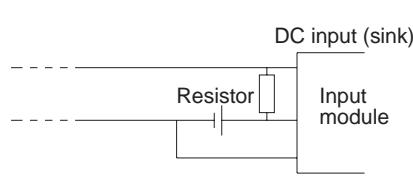	Condition	Cause	Corrective Action
Example 1	Input signal does not turn OFF.	<ul style="list-style-type: none"> <li>Leakage current of input switch (e.g. drive by non-contact switch).</li> </ul> 	<ul style="list-style-type: none"> <li>Connect an appropriate resistor which will make the voltage across the terminals of the input module lower than the OFF voltage value.</li> </ul>  <p>It is recommended to use 0.1 to 0.47 <math>\mu\text{F}</math> + 47 to 120 <math>\Omega</math> (1/2 W) for the CR constant.</p>
Example 2	Input signal does not turn OFF.	<ul style="list-style-type: none"> <li>Drive by a limit switch with neon lamp.</li> </ul> 	<ul style="list-style-type: none"> <li>Same as Example 1.</li> <li>Or make up another independent display circuit.</li> </ul>
Example 3	Input signal does not turn OFF.	<ul style="list-style-type: none"> <li>Leakage current due to line capacity of wiring cable. (Line capacity C of twisted pair wire is approx. 100 PF/m).</li> </ul> 	<ul style="list-style-type: none"> <li>Same as Example 1.</li> <li>However, leakage current is not generated when the power supply is located in the input equipment side as shown below.</li> </ul> 
Example 4	Input signal does not turn OFF.	<ul style="list-style-type: none"> <li>Drive by switch with LED indicator.</li> </ul> 	<ul style="list-style-type: none"> <li>Connect a register which will make the voltage between the input module terminal and common higher than the OFF voltage, as shown below.</li> </ul> 


\* An example calculation of a value for a connected resistor is given on the following page.

Table 8.1 Input Circuit Problems and Corrective Action (Continued)

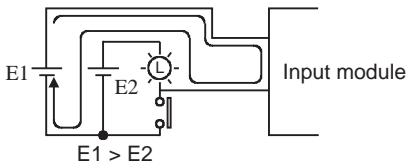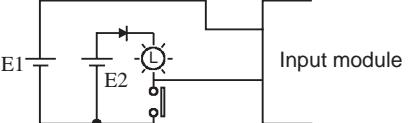
	Condition	Cause	Corrective Action
Example 5	Input signal does not turn OFF.	<ul style="list-style-type: none"> <li>Sneak path due to the use of two power supplies.</li> </ul>  <p>E1 E2 E1 &gt; E2</p> <p>Input module</p>	<ul style="list-style-type: none"> <li>Use only one power supply.</li> <li>Connect a sneak path prevention diode. (Figure below)</li> </ul>  <p>E1 E2</p> <p>Input module</p>

Example calculation for Example 4

The switch with an LED indicator is connected to A1SX40, and there is a 4 mA leakage current.

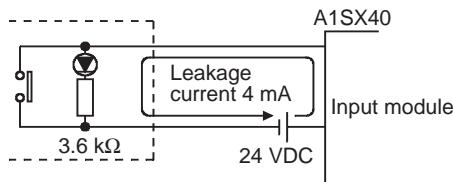

- (1) Since the leakage current does not reach the 1 mA OFF current of the A1SX40, the input signal does not go OFF. Connect a resistor as shown below:

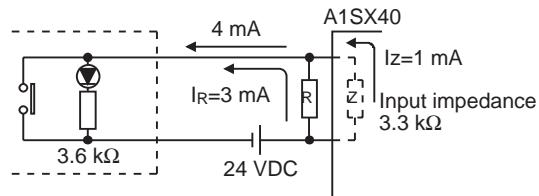

- (2) Calculate the value of the connected resistor R as follows:

To reach the 1 mA OFF current of the A1SX40, connect a resistor R through which a current of 3 mA or greater flows.

$$I_R : I_z = Z \text{ (input impedance)} : R$$

$$R \leq \frac{I_z}{I_R} \times (\text{input impedance}) = \frac{1}{3} \times 3.3 = 1.1 [\text{k}\Omega]$$

$$R < 1.1 \text{ k}\Omega$$

When R = 1 kΩ, the power capacity must be:







$$W = (\text{applied voltage})^2 \div R = 26.4^2 \div 1000 = 0.7 (\text{W})$$

- (3) The power capacity of the resistor should be three to five times as large as the actual power consumption. The problem can therefore be solved by connecting a 1 kΩ, 2 to 3 W resistor to the terminal in question.

#### 8.2 Output Circuit Failures and Corrective Action

This section describes possible problems with output circuits, and corrective action.

**Table 8.2 Output Circuit Failures and Corrective Action**

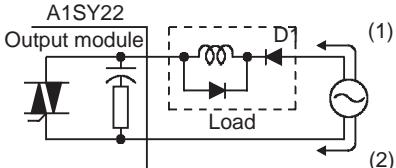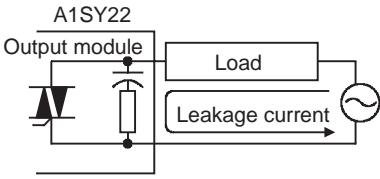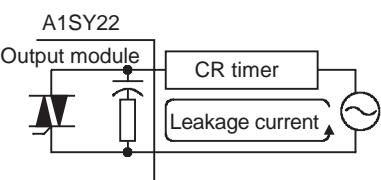
	Condition	Cause	Corrective Action
Example 1	When the output is OFF, excessive voltage is applied to the load.	<ul style="list-style-type: none"> <li>Load is half-wave rectified inside (in some cases, this is true of a solenoid).</li> </ul>  <ul style="list-style-type: none"> <li>When the polarity of the power supply is as shown in (1), C is charged. When the polarity is as shown in (2), the voltage charged in C plus the line voltage are applied across D1. Max. voltage is approx. 2.2E.</li> </ul>	<ul style="list-style-type: none"> <li>Connect a resistor several tens to hundreds of kΩ across the load.</li> </ul> <p>If a resistor is used in this way, it does not pose a problem to the output element. But it may cause the diode, which is built into the load, to deteriorate, resulting in a fire, etc.</p> 
Example 2	The load does not turn OFF (triac output).	<ul style="list-style-type: none"> <li>Leakage current due to built-in noise suppression</li> </ul> 	<ul style="list-style-type: none"> <li>Connect C and R across the load.</li> </ul> <p>When the wiring distance from the output card to the load is long, there may be a leakage current due to the line capacity.</p> 
Example 3	When the load is a CR type timer, time constant fluctuates (triac output).	<ul style="list-style-type: none"> <li>Drive the relay using a contact and drive the C-R type timer using the same contact.</li> </ul> 	<ul style="list-style-type: none"> <li>Some timers have half-wave rectified internal circuits. Therefore, take the precautions indicated in the example.</li> </ul> <p>Calculate the CR constant depending on the load.</p> 

## APPENDICES

## APPENDIX 1 OUTSIDE DIMENSIONS


## 1.1 Input/Output Modules

## 1.1.1 Terminal base connecting type

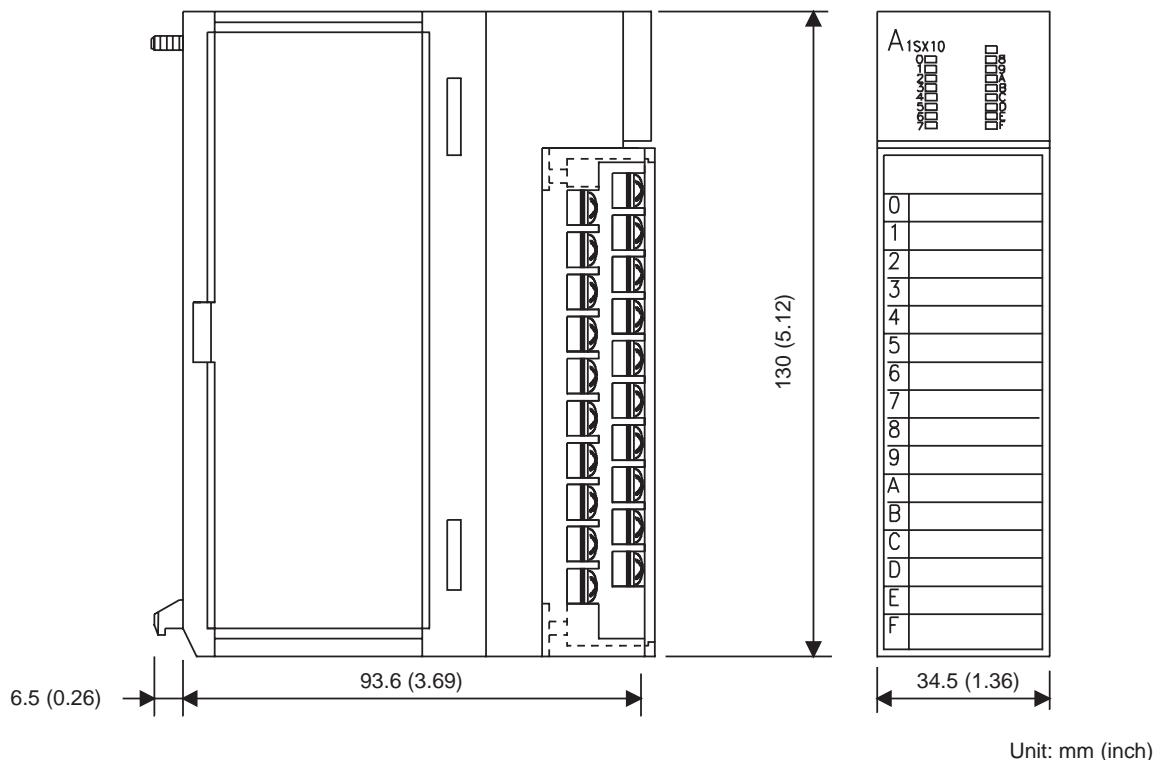


## 1.1.2 40-pin connector type

## (1) 32-input/output module

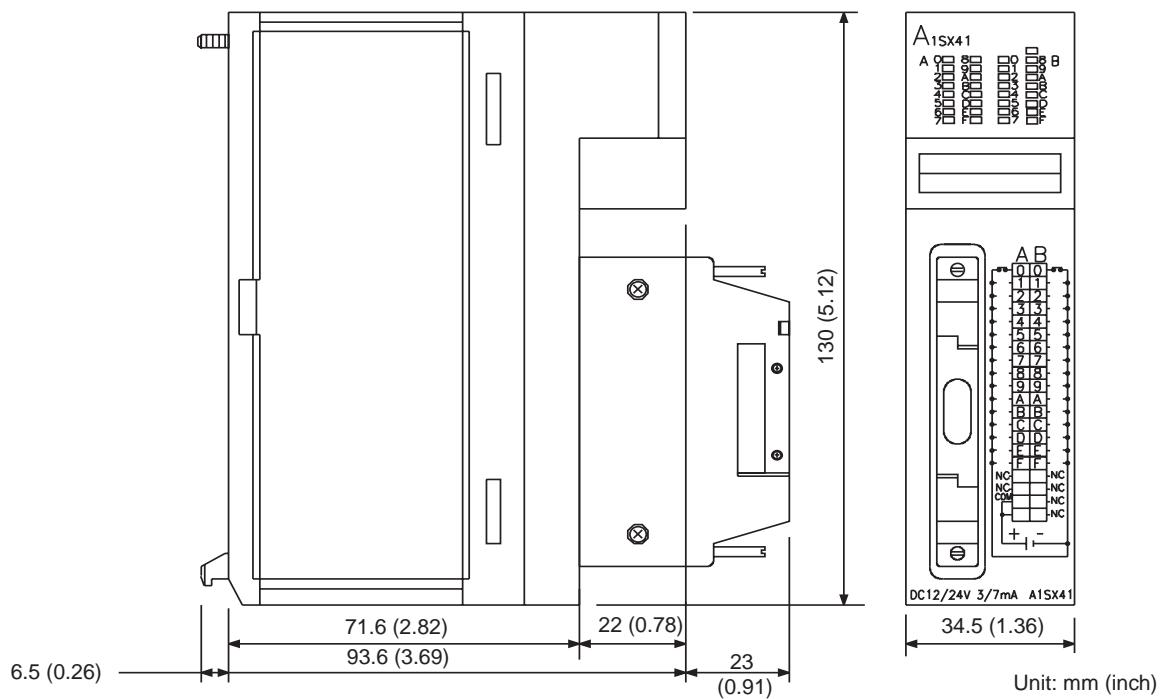


## (2) 64-input/output module

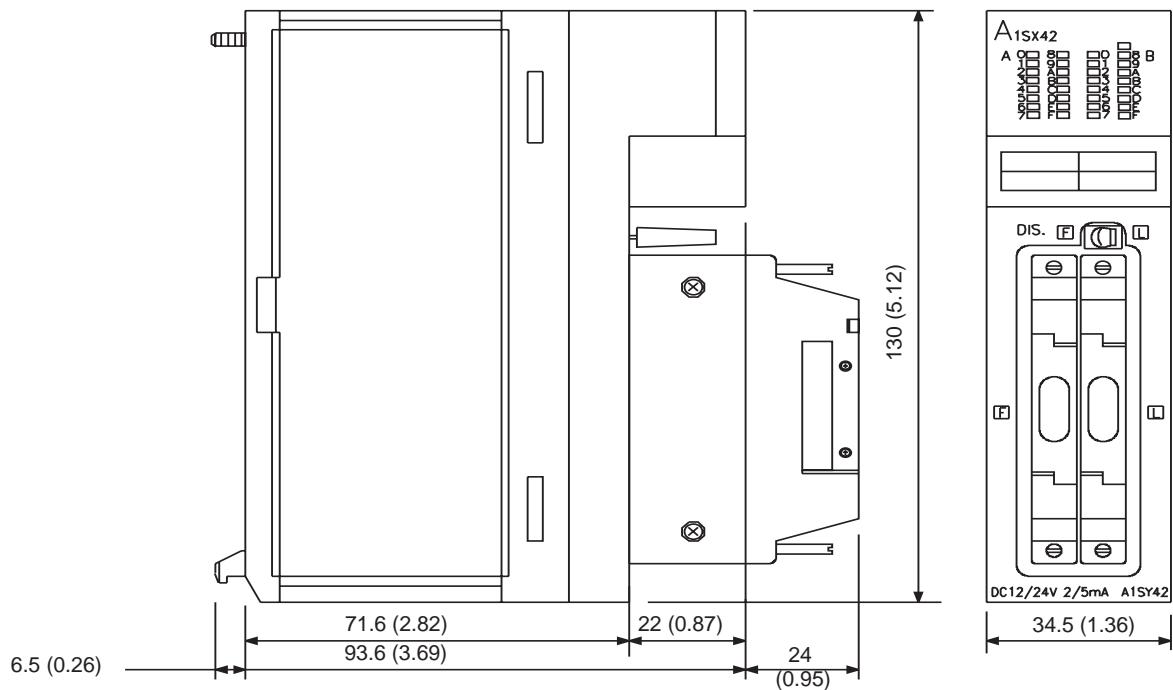


Unit: mm (inch)

## 1.1.3 37-pin D sub-connector type 32-input/output module

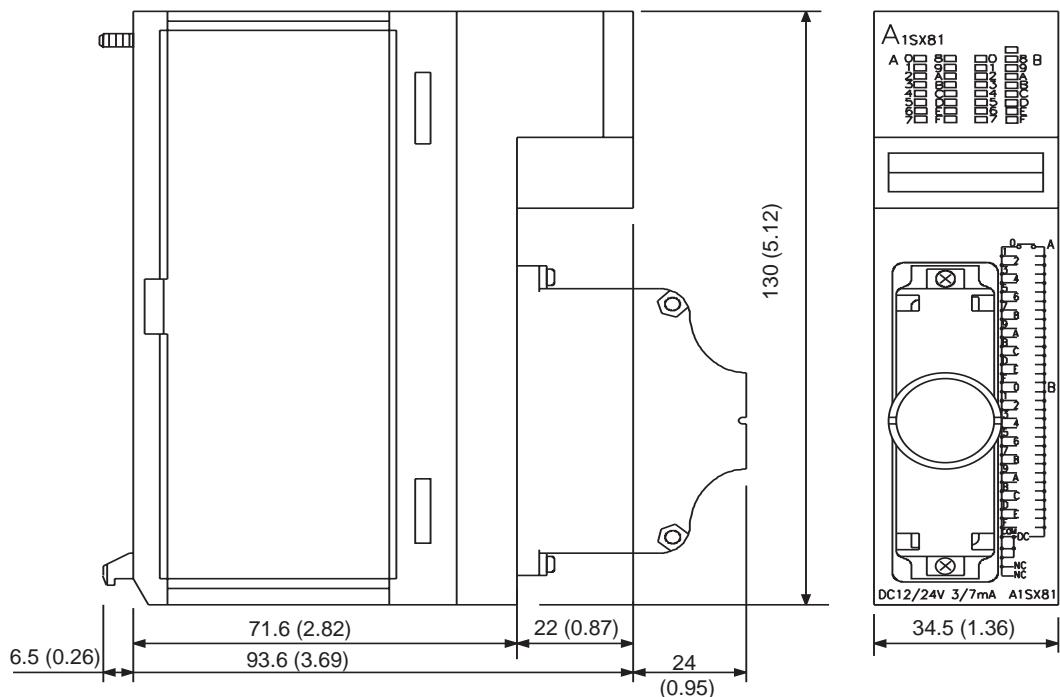


Unit: mm (inch)

## 1.2 Dynamic I/O Module

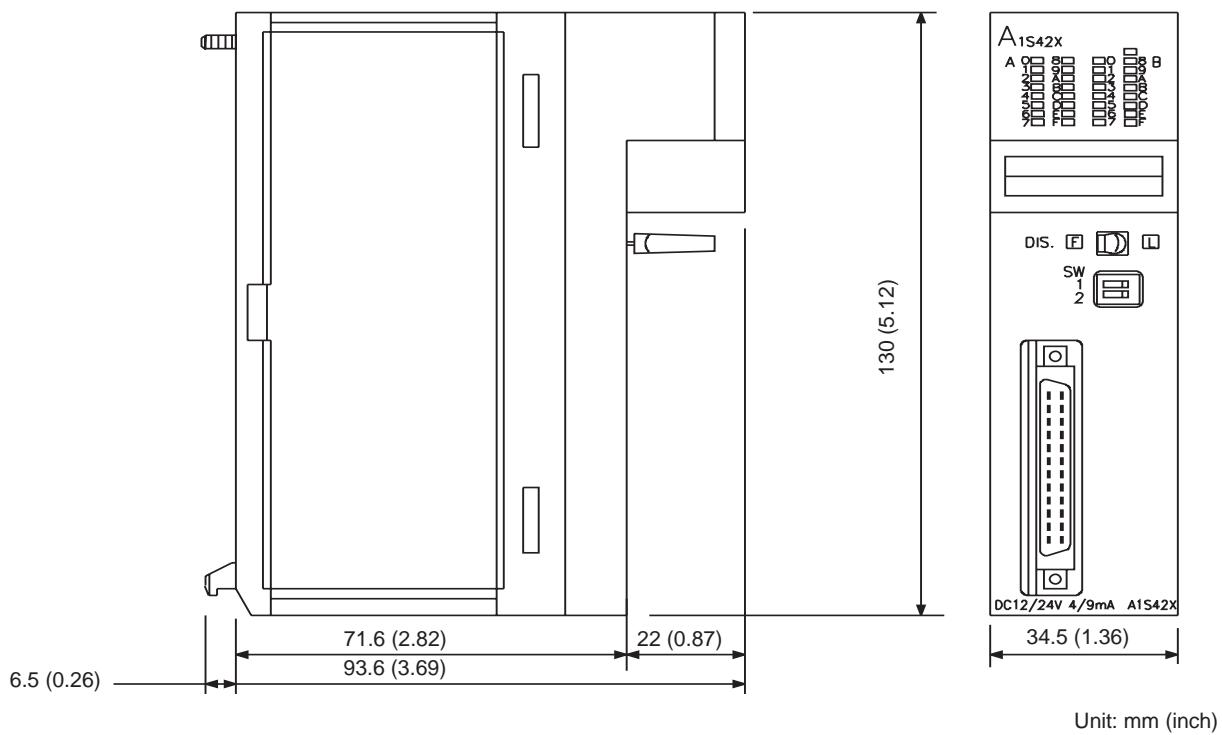

Unit: mm (inch)


## 1.3 A1SJ-56DT Input/Output Combination Module

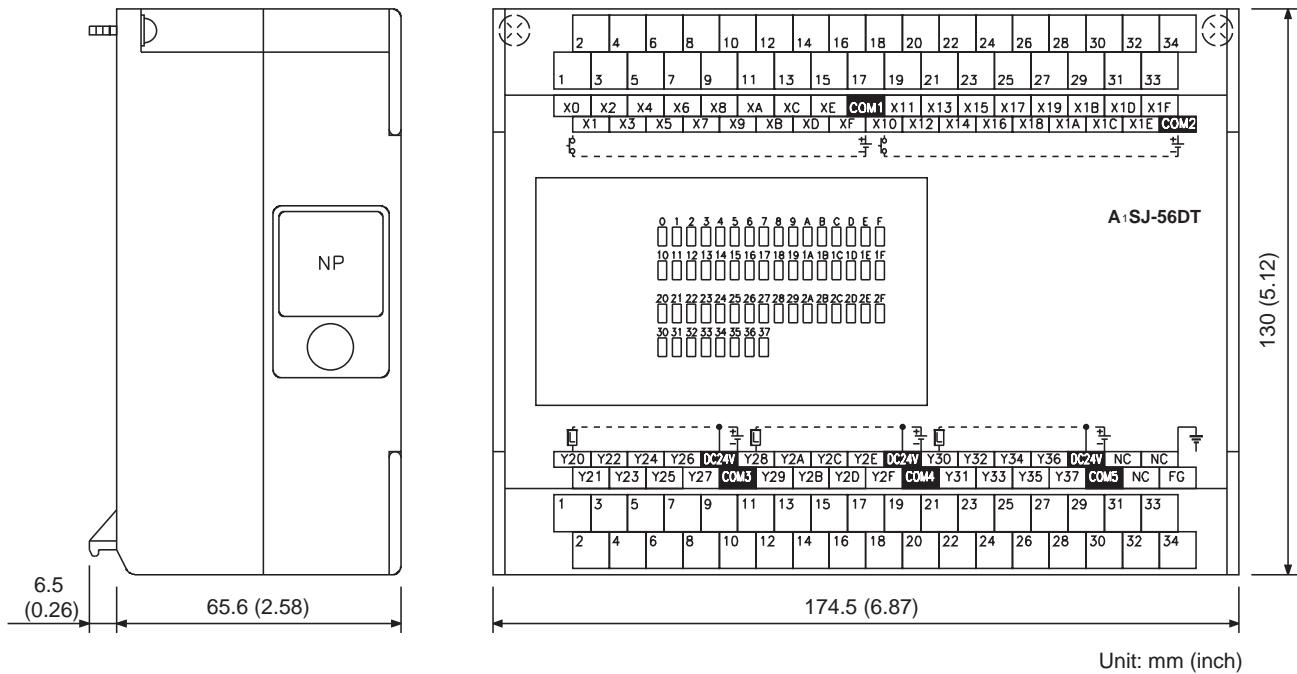


Unit: mm (inch)

## 1.4 Dummy Module, Blank Cover

### 1.4.1 A1SG60 blank cover

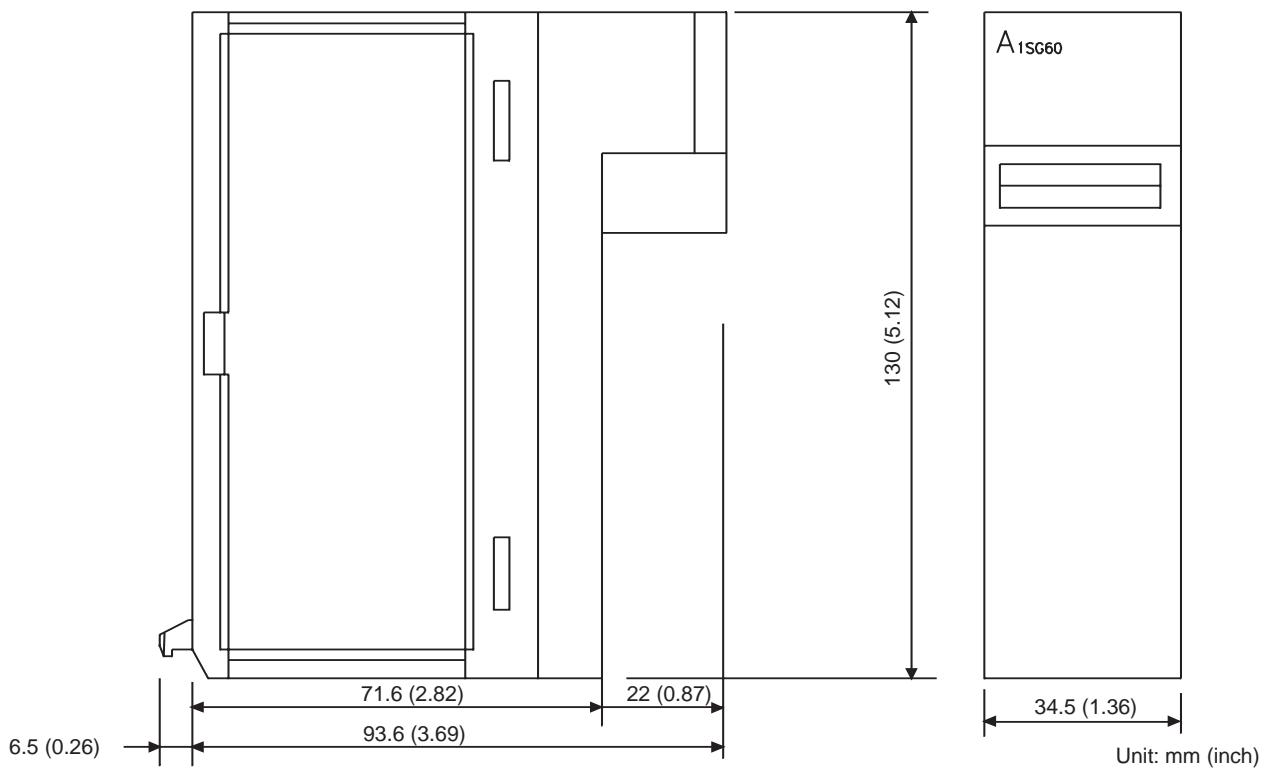


### 1.4.2 A1SG62 dummy module

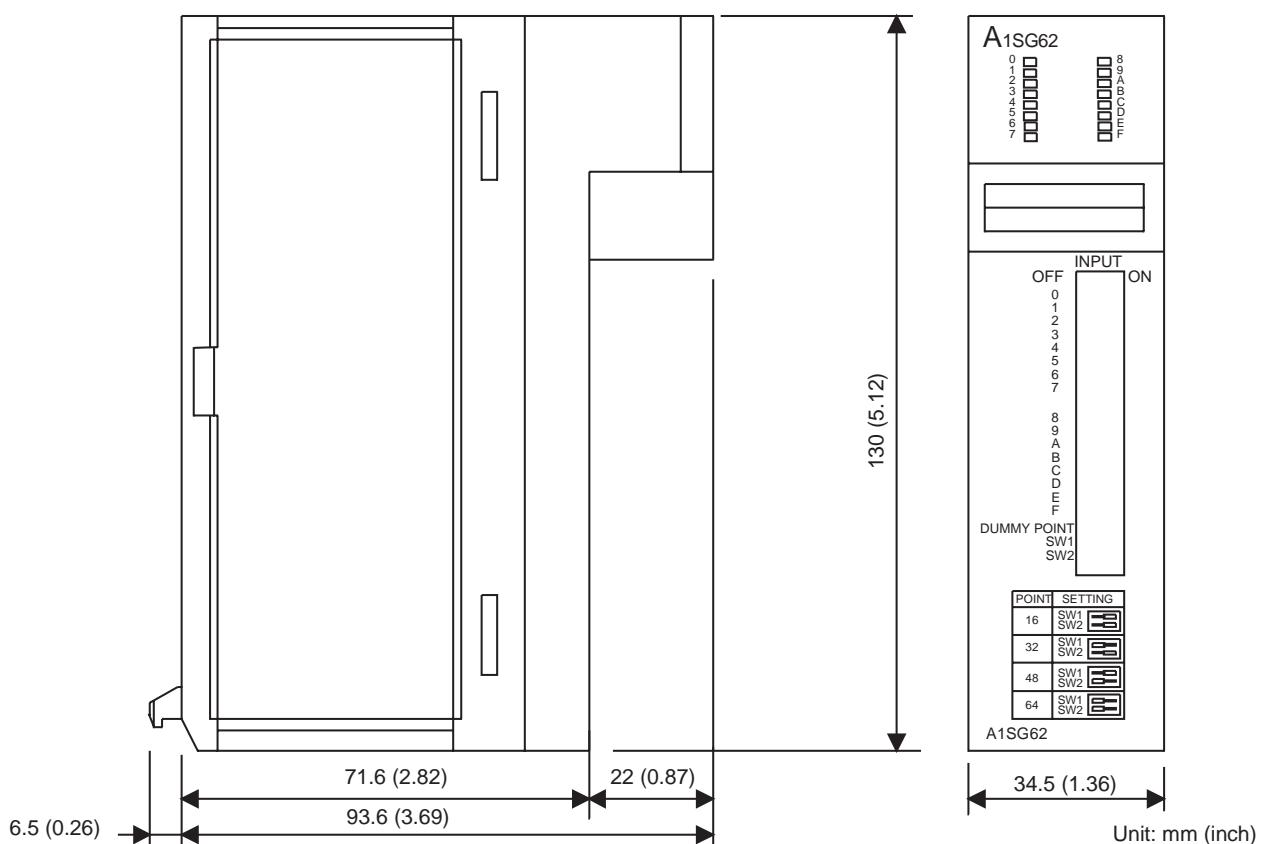

## 1.5 Connector/Terminal Block Convertor Modules

### 1.5.1 A6TB-36 type connector/terminal block convertor module


2- $\phi$ 4.5 mounting holes (M4 x 25 )

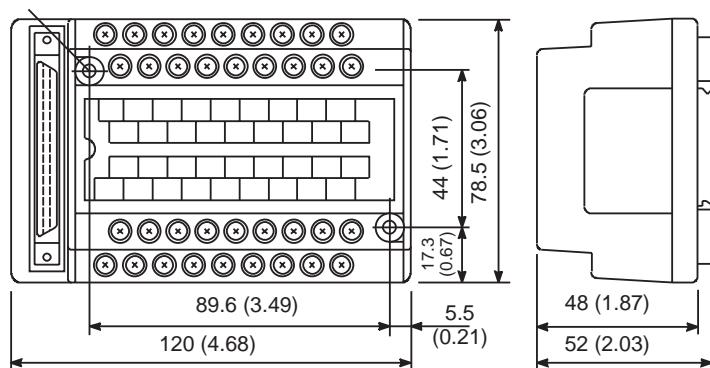


Unit: mm (inch)

### 1.5.2 A6TB-54 type connector/terminal block convertor module

2- $\phi$ 4.5 mounting holes (M4 x 25 )

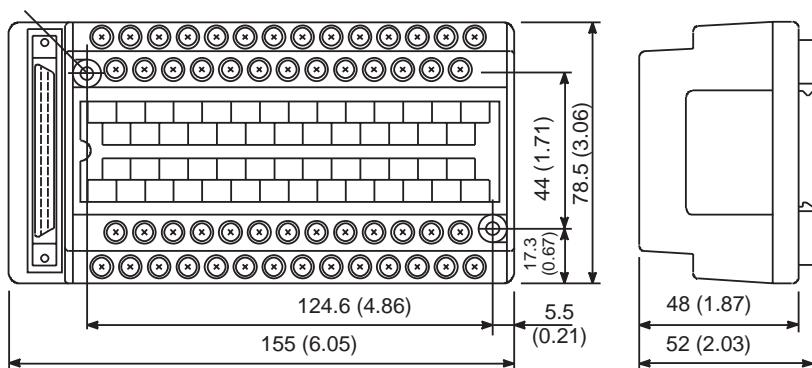


Unit: mm (inch)

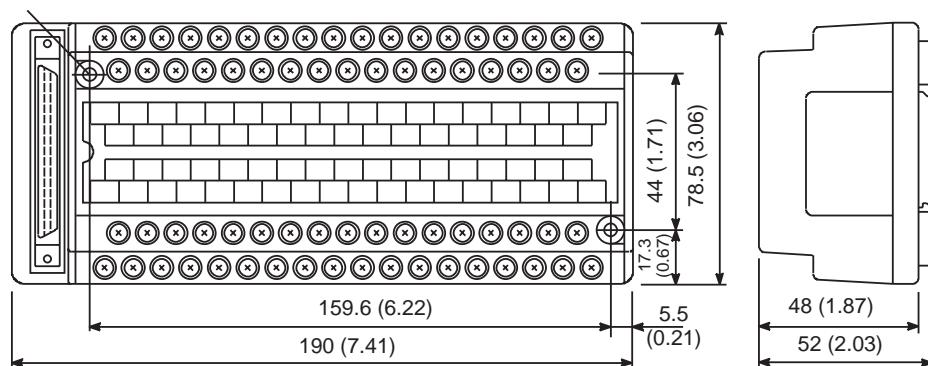**1.5.3 A6TBX7011 type connector/terminal block convertor module**2- $\phi$ 4.5 mounting holes (M4 x 25)


Unit: mm (inch)

## 1.6 40-Pin Connectors

### 1.6.1 A6CON1 soldering-type 40-pin connector, A6CON2 crimp-contact-type 40-pin connector

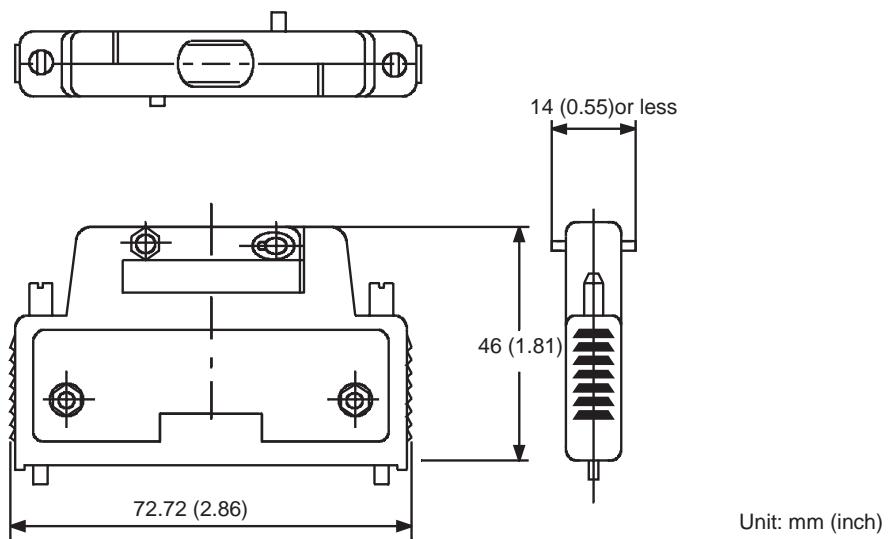


### 1.6.2 A6CON3 pressure-displacement-type 40-pin connector

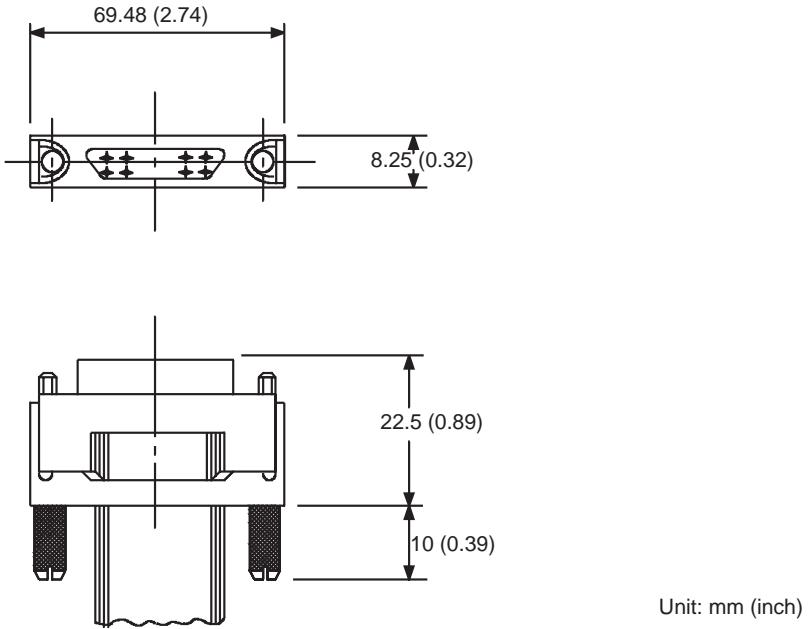



## 1.7 Pin D Sub-Connectors

### 1.7.1 A6CON1E soldering type 37-pin D sub-connector A6CON2E crimp-contact-type 37-pin D sub-connector

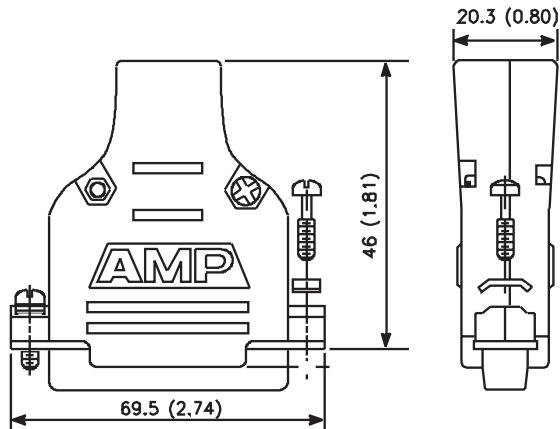

Unit: mm (inch)

### 1.7.2 A6CON3E pressure-displacement-type 37-pin D sub-connector

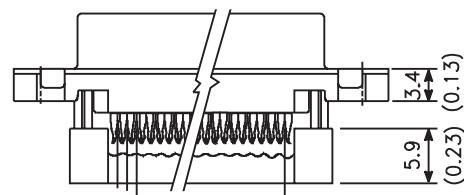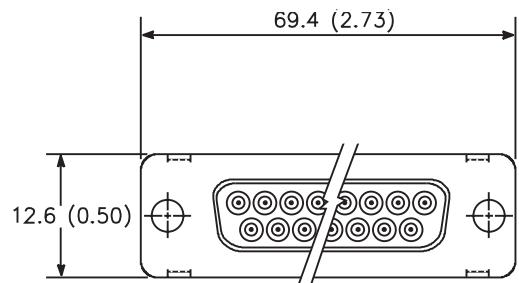

Unit: mm (inch)