
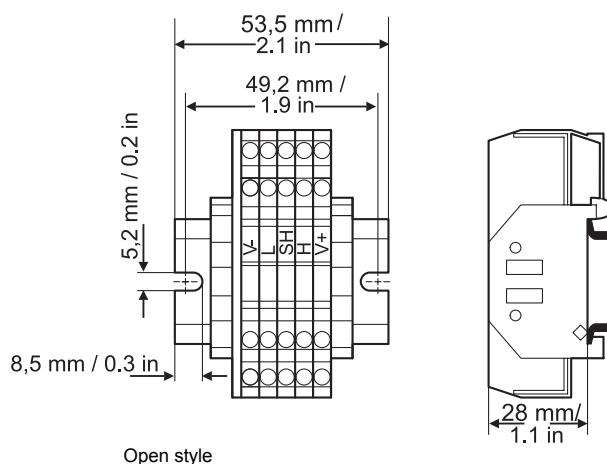



Multi-Port Device Taps, DeviceNet compatible

1/1

2 trunk Cable (input, output), 2 drop cables, "open-style"

Data sheet

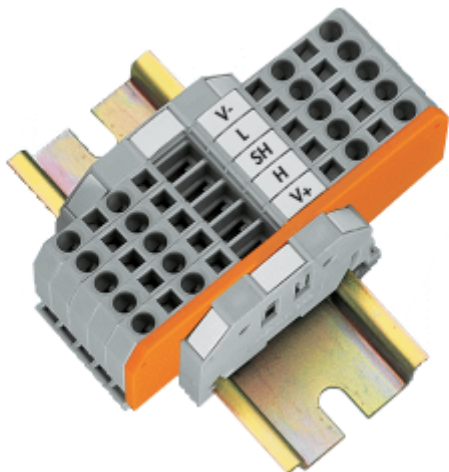

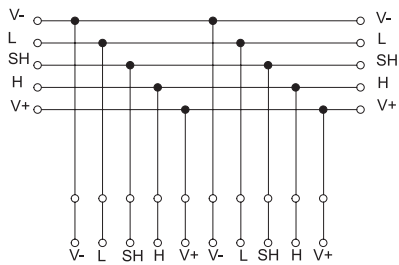Description	Item-No.	Pack.-unit pcs								
Multi-port device tab; 2 trunk cables (input, output); 2 drop cables "open style" (PCB version available, not shown)	810-901/000-001	1								
- These multi-port device tabs allows the connection of up to 2 drop cables. - DeviceNet requires a terminating resistor to be installed at each end of the trunk. The resistor (metal film resistor) requirements are: 121 Ω ± 1 %, ¼ Watt. Termination resistors should not be installed at the end of a drop; only at the two ends of the main trunk, as required.	Technical Data <table><tr><td>Terminal blocks</td><td>5 x 280-633</td></tr><tr><td>End stops</td><td>2 x 249-116</td></tr><tr><td>Mounting rail</td><td>DIN 35 rail, slotted as shown</td></tr><tr><td>Wire range</td><td>0,08–2,5 mm² / AWG 28-12</td></tr></table>	Terminal blocks	5 x 280-633	End stops	2 x 249-116	Mounting rail	DIN 35 rail, slotted as shown	Wire range	0,08–2,5 mm ² / AWG 28-12	
Terminal blocks	5 x 280-633									
End stops	2 x 249-116									
Mounting rail	DIN 35 rail, slotted as shown									
Wire range	0,08–2,5 mm ² / AWG 28-12									
Application Notes 	Accessories <table><tr><td>Test adapter for mini banana plug</td><td>810-900/004-000</td></tr><tr><td>Termination resistor</td><td>810-900/003-000</td></tr></table>	Test adapter for mini banana plug	810-900/004-000	Termination resistor	810-900/003-000					
Test adapter for mini banana plug	810-900/004-000									
Termination resistor	810-900/003-000									