

Código de compra / How to order

TPSF6 - 1 2 RG

Tensão / Voltage
1 - 110VCA / VAC*
2 - 220VCA / VAC
7 - 24VCA/VCC / VAC/VDC
9 - 12VCA/VCC / VAC/VDC*
*Sob consulta / on inquiry

Nº de lentes /
Number of lenses
1 - 1 lente / 1 lens
2 - 2 lentes / 2 lenses
3 - 3 lentes / 3 lenses
4 - 4 lentes / 4 lenses
5 - 5 lentes / 5 lenses

Cores das lentes / Lens color
R - Vermelho / Red
G - Verde / Green
B - Azul / Blue
O - Laranja / Orange
W - Branco / White

Tipo / Type
TPSL4 - Luz contínua / Continuous light
TPSF6 - Luz pulsante ou contínua / Flashing or continuous light
TPSS6 - Luz pulsante ou contínua com sinalizador sonoro / Flashing or continuous light with buzzer




Lâmpadas / Lamps	Sinalizador sonoro / Buzzer
Soquete / Base type: BA15S	Corrente / Current:
Potência / Power (Incandesc.) 10W (40mm), 10W (60mm)	12VCC / VDC: 0.02A
Corrente LED / LED current: S15-L52: 0.02A S15-L57: 0.03A	24VCC / VDC: 0.03A
	110VAC / VCA: 0.03A
	12VAC / VCA: 0.04A
	Volume / Volume: 90dB - 30cm

As torres são fornecidas com lâmpadas incandescentes. Para opção LED, adquirir separadamente lâmpada LED S15L.
Tower lights are supplied with incandescent lamps. For LED option, please order separately LED lamp S15L.

Dimensões / Dimensions (mm)


TPSL4

Luz contínua
Continuous light

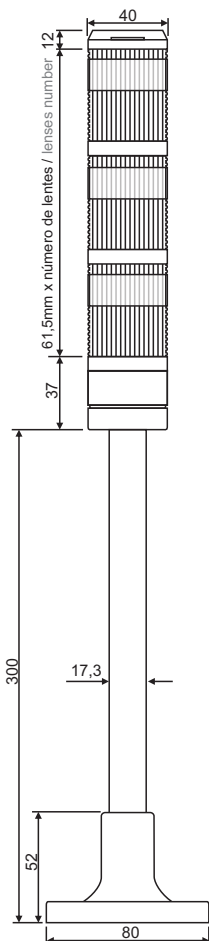




TPSF6

Luz pulsante ou contínua
Flashing or continuous light

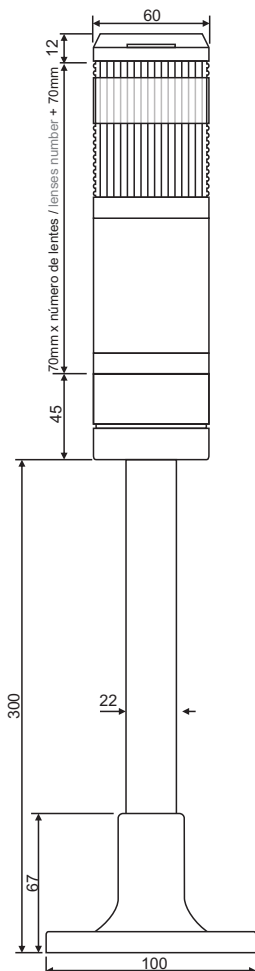

TPSS6

Luz pulsante ou contínua
com sinalizador sonoro
Flashing or continuous light with buzzer

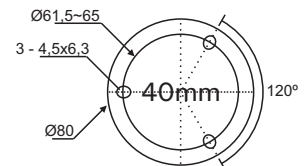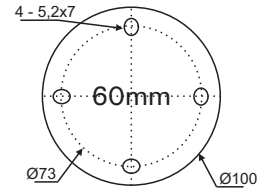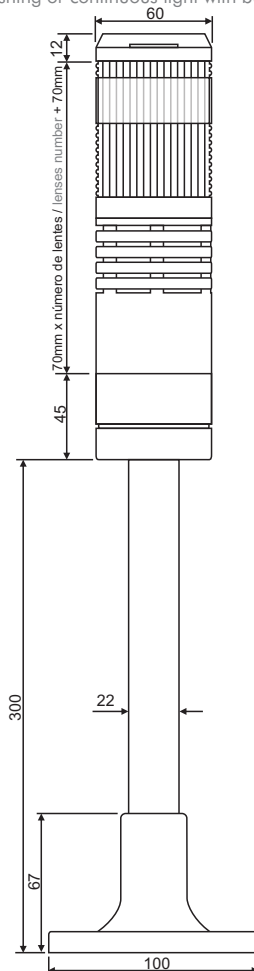

Furação para
montagem
Mounting holes

Acessórios / Accessories

Lâmpadas BA15S

BA15S lights

S15L **1S15L**

1 S15-L4-2 R

Tipo / Type
Em branco / Nil - LED
1 - Incandescente
Incandescent

Tensão / Voltage
1 - 110VAC / VCA
2 - 220VAC / VCA
7 - 24VCC / VDC

Tipo / Type
L5 - LED (40 e 60mm)
L4 - Incandescente / Incandescent (40mm)
L6 - Incandescente / Incandescent (60mm)

Cores das lentes
Lens color
Em branco / Nil -
Apenas incandescente
Only for bulb
R - Vermelho / Red
G - Verde / Green
B - Azul / Blue
O - Laranja / Orange
W - Branco / White

Lente

Lens

2TPTL 4 02 R

Cores das lentes
Lens color
BL - Azul / Blue
G - Verde / Green
R - Vermelho / Red
Y - Amarelo / Yellow
W - Branco / White

Diametro das lentes
Lens diameter
4 - 40mm 6 - 60mm

Suporte angular

Foldable mounting bracket


Somente para TPSF6 e TPSS6
Only for TPSF6 and TPSS6

1TPTL6-F


4 - 5,2x7 Ø100
60mm Ø73
Mov. de giro / Turn movement 320°
108,5 90°
54,5 15,7

Ligações / Wiring

TPSL4

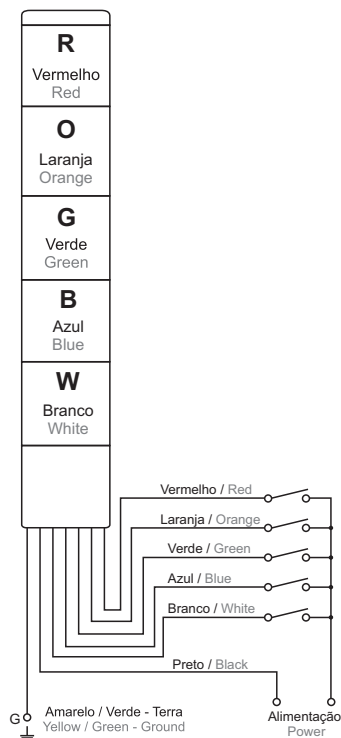

TPSF6

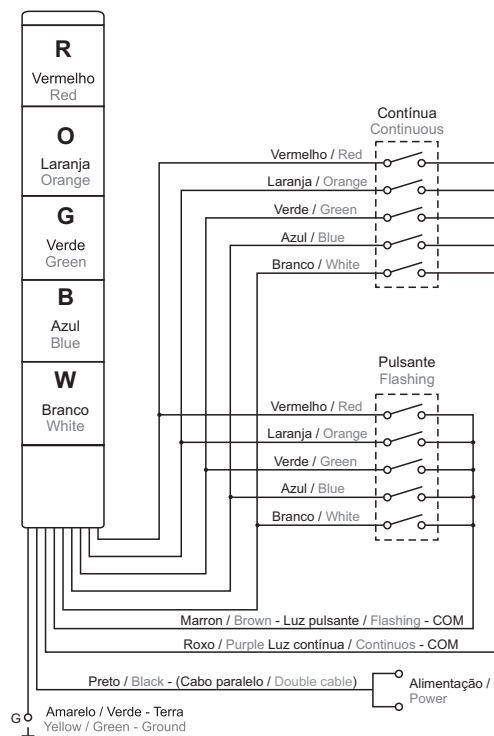

TPSS6

