

# **Gigabit SSL VPN Security Router**



As Internet becomes essential for business, the crucial solution to prevent your Internet connection from failure is to have more than one connection. PLANET SG-4800 is the **Gigabit SSL VPN Security Router** ideal to help the SMBs increase the broadband network performance and reduce the risks of potential shutdown if one of the Internet connections fails. The SG-4800 can monitor each WAN link status and automatically activate backup links when a failure is detected. The detection is based on the configurable target Internet addresses.

## Network Efficiency Improvement with Load-Balancing

The SG-4800 allows you to perform load-balancing by distributing the traffic through three or four WAN connections. In Outbound Load Balancing, the network sessions are assigned based on the user configurable load balancing mode, including "Auto Load Balance", "Unbinding WAN Balance" and "Strategy Routing". Users can also configure which IP or TCP/UDP type of traffic use which WAN port to connect. The Inbound Load Balancing is for enterprise's internal server to reduce the server loading and the risks of system crash so that the SG-4800 helps to improve the server working efficiency.

## Strong Protection for Network Security

In addition to providing Multi-Homing functions, the SG-4800 Gigabit SSL VPN Security Router integrates a complete security solution in one box. It provides the policy-based firewall, content filtering function and **VPN connectivity** including SSL, IPSec, and PPTP VPN. The SSL VPN function supports up to **60 SSL VPN connection tunnels**. The IPSec VPN feature provides with **3DES** and **AES** encryption make it a perfect product for your network security. By applying the SG-4800, there is no need of integrating different security products on the network and worry free from complicated connections and settings.

## QoS Bandwidth Management

Besides offering easy yet powerful bandwidth management functions, the SG-4800 features Smart QoS with dynamic bandwidth management to automatically control P2P, video downloading and other bandwidth hogging in order to avoid bandwidth insufficiency. It helps the network administrators better allocate network resources based on business priorities, as well as to shape and control bandwidth usage by prioritizing different persons/groups or applications.

## Easy Remote Management

The SG-4800 provides embedded Mirror Port to connect with the monitoring devices for online behavior monitoring. It also supports secure remote management via web browser with protection of user authentication.

## **Key Features**

## PHYSICAL PORT

- 8 x 10/100/1000 Base-T RJ-45, configurable with LAN 1 (Mirror Port)
- 4 x 10/100/1000 Base-T RJ-45 WAN port
- 1 x 10/100/1000 Base-T RJ-45 DMZ port

## **MULTI-WAN FUNCTION**

- Inbound / Outbound Load Balance: by session and by IP
- Bandwidth expansion with 4 Gigabit WAN ports
- Multi-WAN auto line backup

## **IP ROUTING FEATURE**

- Dynamic Route RIP v1/v2
- Static Route
- Strategy Routing

## BANDWIDTH MANAGEMENT

- Guaranteed Bandwidth
- Max. Bandwidth
- Session Limit
- Port-Based QoS

## FIREWALL SECURITY

- Stateful Packet Inspection (SPI) Firewall
- Denial of Service (DoS) prevention
- IP & Port filtering
- · Block Website by Keyword, Content Filter
- Firewall detection: Ping of Death, SYN Flooding, Land attack, IP Spoofing
- Supports DMZ Host to protect your network
- Prevents ARP Attack on LAN

#### **VPN FEATURE**

- Configure Concurrent Tunnels: 200 IPSec + 60 PPTP + 60 SSL VPN or other combinations within the memory's limitation
- IPSec, PPTP and L2TP Pass through
- Supports IPSec
  - IPSec Hardware acceleration
  - IPSec Encryption DES / 3DES / AES128 / AES192 / AES256
  - IPSec Authentication MD5 / SHA1
  - VPN Hub



- Supports SSL VPN
  - 10 full set SSL VPN tunnel / 50 Virtual Passage SSL VPN Client
  - Remote Desktop Access
  - Terminal Access: Telnet, SSH
  - Authentication: Radius, LDAP, Microsoft Active Directory and NT Domain Name
  - SSL Encryptions: 128bit SHA1 (DES-CBC-SHA)
  - Certificate Server: RSA, PKI, Digital Certificate
  - Host Check: Virus Scan, Personal Firewalls, OS Patch
  - Logging and monitoring: Syslog logging of SSL VPN events by user, service and type of event

## NETWORKING

- DHCP Server (supports class C), client, dynamic IP, static IP, IP Grouping support
- Multiple DHCP Servers support multiple Subnet (supports 4 sets of Class C)
- Applications

PLANET Multi-Homing VPN Security Router, SG-4800 has the powerful firewall functions including SPI Firewall DoS prevention, IPSec and PPTP VPN solutions. The SG-4800 provides a flexible way of secured data communication for Branches, Venders, and/or mobile workers to connect to the corporate headquarter.

• PPPoE / Static IP / DHCP Client

• DDNS: supports DynDNS, 3322

NETWORK MANAGEMENT

DNS Relay

web access

SNMP v1/v2c

• Transparent Bridge

٠

•

Protocol: TCP/IP, ARP, ICMP, FTP/TFTP, IPv4, IPv6NAT with port forwarding (Virtual Server)


Password protected configuration or management sessions for

Port Management - Speed / Duplex / Auto Negotiation / VLAN

• Comprehensive web based management and policy setting


Monitoring, Logging, and Alarms of system activities

· Firmware upgrade through Web browser

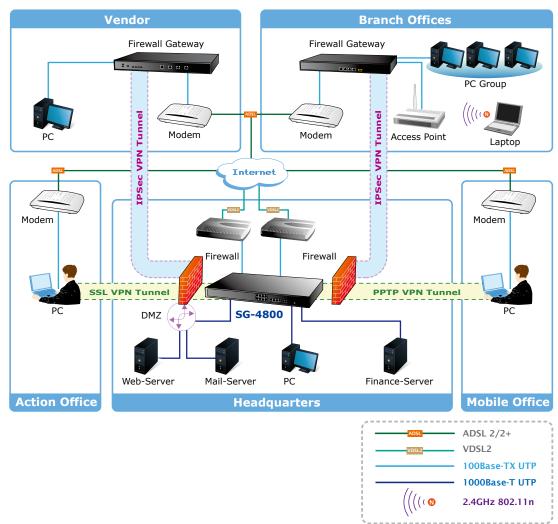



The SG-4800 can connect the multiple WANs by different ISPs. It can create a stable and qualified VPN connection for many important applications such as VoIP, Video Conference and data transmission.

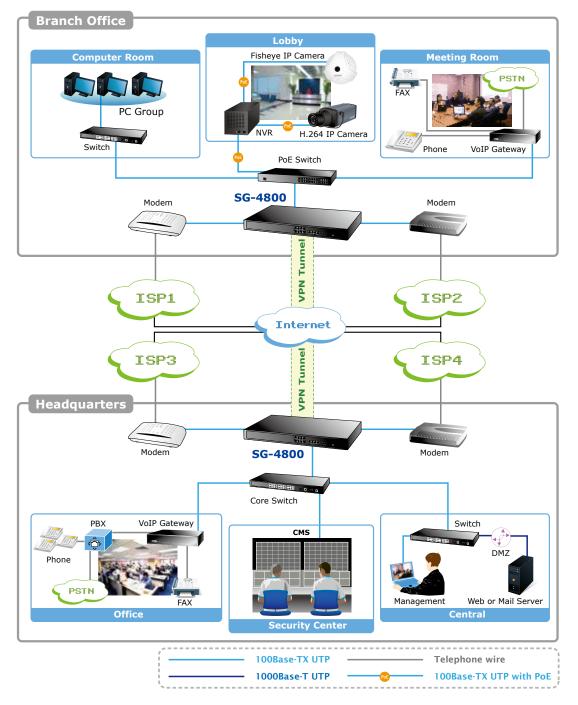

3



SG-4800

# Specification

Draduct		Circhit SEL VIDN Security Pouter
Product		Gigabit SSL VPN Security Router SG-4800
Model Hardware		50-4000
патимате	LAN	8 x 10/100/1000Mbps RJ-45
Ethernet	WAN	4 x 10/100/1000Mbps RJ-45
	DMZ	1 x 10/100/1000Mbps RJ-45
	Reset	1 x Reset button for factory default settings
Button	Power	1 x Power on/off switch
	1 OWCI	Temperature: 0 ~ 50 Degree C
Operating Environment		Relative Humidity: 10~85% (non-condensing)
Dimension (W x D x H)		440 x 254 x 43.5 mm
Power		100~240V AC, 50~60 Hz, max 0.8A
Regulatory		FCC Class A, CE
Software		
		Inbound / Outbound Load Balance: by session and by IP
Multi-WAN	Function	Protocol Binding
		Network Service Detection
Routing		Dynamic Route RIP v1/v2
		Static Route
		Concurrent session: 50000
Suctors Dave	ormanco	Firewall performance: 1Gbps
System Perf	ormance	Corporation Size: SMB (clients 200~250)
		3DES performance: 270Mbps
		Guaranteed Bandwidth
Bandwidth	Management	Max Bandwidth
Banuwiuun	Management	Session Limit
		Port-Based QoS
		NAT
		One-to-One NAT
		Multiple-to-One NAT
		Stateful Packet Inspection (SPI) Firewall
		Denial of Service (DoS) prevention
Firewall Sec	urity	IP & Port filtering
		Block Website by Keyword, Content Filter
		Firewall detection: Ping of Death, SYN Flooding, Land attack, IP Spoofing
		Email Alert for Hacker Attack
		IP&MAC Binding
		Supports DMZ Host to protect your network
		Prevents ARP Attack on LAN
		Configurable DMZ
		DHCP Server (supports class C), client, dynamic IP, static IP, IP Grouping support
		Multiple DHCP Server (supports 4 sets of Class C)
		PPPoE / Static IP / DHCP Client Multiple Subnet
Networking		Protocol: TCP/IP, ARP, ICMP, FTP/TFTP, IPv4, IPv6
		NAT with port forwarding (Virtual Server)
		DNS Relay
		DDNS: Supports DynDNS, 3322
		Password protected configuration or management sessions for web access
		Port Management – Speed / Duplex / Auto Negotiation / VLAN
		Transparent Bridge
		Comprehensive web based management and policy setting
		SNMP v1/v2c
Network Management		Monitoring, Logging, and Alarms of system activities
		Firmware upgrade through Web browser

4



SG-4800

Network Management		Comprehensive web based management and policy setting SNMP v1/v2c
		Monitoring, Logging, and Alarms of system activities
		Firmware upgrade through Web browser
	PPTP VPN	60 PPTP VPN Tunnels
	IPSec VPN	200 IPSec VPN Tunnels
		IPSec Hardware acceleration
		Up to 2 Group VPNs support
		Friendly VPN Tunnel Management
		IKE: Pre-Shared keys
		IPSec Encryption DES / 3DES / AES128 / AES192 / AES256
		IPSec Authentication MD5 / SHA1 Supports PMTU
		NAT Traversal
		Connects on Demand
		DPD detection
		VPN Hub
		IP by DNS Resolved
		View Log
		10 full set SSL VPN tunnel / 50 Virtual Passage SSL VPN Client
		■ SSL Hardware acceleration
VPN	SSL VPN	Remote Desktop Access
Support		■ HTTP and HTTPs Proxy
Support		FTP and Windows Network File Sharing
		■ Terminal Access: Telnet, SSH
		Authentication: Radius, LDAP, Microsoft Active Directory and NT Domain Name
		Platform supports Windows / Linux / MAC
		SSL Encryptions: 128bit SHA1 (DES-CBC-SHA)
		<ul> <li>Encrypted cookies</li> <li>Web cache cleaner</li> </ul>
		Certificate Server: RSA, PKI, Digital Certificate
		<ul> <li>Host Check: Virus Scan, Personal Firewalls, OS Patch</li> </ul>
		<ul> <li>Role based management</li> </ul>
		<ul> <li>Access Policy Management</li> </ul>
		Logging and monitoring: Syslog logging of SSL VPN events by user, service and type of event
		■ Customized User Portal: Allows Portal Layout, Available Services to be customized
		■ Single sign-on: Allows Single Sign-On for accessing multiple private network resources
		Group and Global Bookmark Support: Enables users to access resources without needing to
		remember hostnames or IP addresses
		Tunnel quantity upgrade mechanism
		IPSec, PPTP, L2TP Pass through

# Ordering Information

SG-4800

Gigabit SSL VPN Security Router

# **Related Products**

VRT-311S	Broadband VPN Router
VRT-402N	802.11n Wireless VPN/Firewall Router
VRT-420N	802.11n Multi-Homing Broadband Router
MH-3400	Gigabit Multi-Homing VPN Security Router
SG-1000	VPN Security Gateway
CS-1000	Multi-Homing Content Security Gateway
CS-2001	UTM Content Security Gateway

## Data Sheet

05-12

<u>PLANET Technology Corporation</u> 11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: sales@planet.com.tw

Fax: 886-2-2219-9528 www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2012 PLANET Technology Corp. All rights reserved.

C-SG-4800

5